









- Exclusive RGB-sync waterblock with patented flow indicator design
- Support the latest addressable RGB M/B sync
- ENERMAX integrated RGB control box


RG

NERMAX

High-efficiency ceramic bearing pump for exceptional durability and noiseless operation



LIQFUSION, an individually addressable RGB liquid cooler for Intel and AMD CPU platforms, is built with an exclusive RGB-sync water-block featuring patented flow indicator, which enables the user to easily monitor the status of coolant flow. Together with visually appealing ENERMAX addressable RGB fans, LIQFUSION can create unique, vivid RGB lighting effects. The addressable RGB water cooler is designed to sync the RGB lighting with selected GIGABYTE, MSI and ASROCK motherboards with addressable RGB headers. Meanwhile, LIQFUSION also includes integrated RGB control box for non RGB-Sync motherboards.

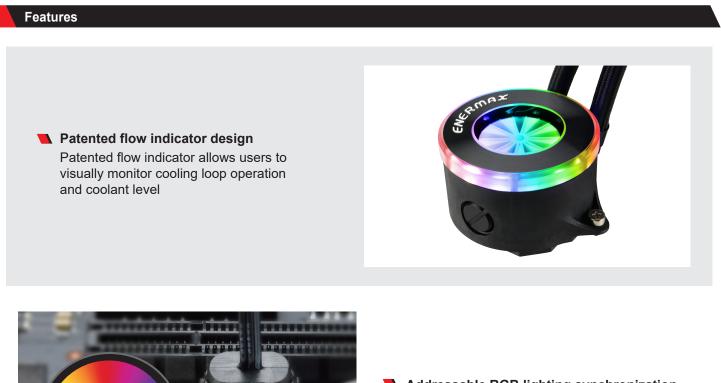

Addressable RGB lighting synchronization Synchronizable RGB Lighting via the latest addressable RGB header of motherboards (3 pin assignment is 5V/D/G)

ENERMAX T.B. RGB AD. fans

ENERMAX T.B. RGB AD. fans support the latest addressable RGB-sync function to provide an incredible RGB lighting experience



2 ways to control RGB lighting effects




Through Motherboard Software

Users can sync the RGB lighting with motherboards featuring addressable RGB headers (3 pin assignment is 5V/D/G).



RGB

Through ENERMAX RGB Control Box Users can use the included control box to adjust preferred lighting effects (10 pre-set effects), brightness and speed.



High-efficiency ceramic pump with rubber cover

The pump is attached to the rubber tubes for optimum vibration damping and silent operation

360mm radiator

Micro fiber channels and large cooling surface for high performance with up to 350W TDP






Premium 400mm weaved tubing is perfect for mainstream system builds



Support the latest Intel[®] and AMD[®] sockets for easy and solid installation (excluding TR4/SP3 socket)



Dow corning® TC5121C thermal grease

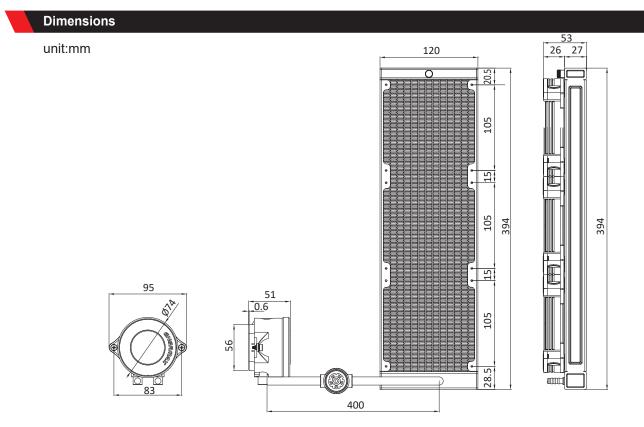

Specifications

Model Number		ELC-LF360-RGB
CPU Socket		Intel [®] LGA 2066/2011-3/2011/1366/1156/1155/1151/1150/1200/1700 AMD [®] AM4/AM3+/AM3/AM2+/AM2/FM2+/FM2/FM1
Material		Copper base with Aluminum Radiator
Pump	Bearing	Ceramic bearing
	МТВF	50,000 hrs
	Rated Voltage (V)	12V
	Rated Current (A)	0.18A
Water Block	Rated Current (A)	0.57A (5V)
Radiator Dimension		394 x 120 x 27 mm
Fan	Dimension	120 x 120 x 25 mm
	Bearing	Twister Bearing
	MTTF	≧160,000 hrs
	Speed	500 - 2000 RPM (±10%)
	Rated Voltage (V)	12V
	Rated Current - Fan (A)	0.15A
	Rated Current - RGB LED (A)	0.8A (5V)
	Air Flow	13.71 ~ 62.1 CFM
	Static Pressure	0.19 ~ 2.95 mm-H2O
	Noise Level	14 ~ 28 dBA
	Connector	4 Pin PWM + 3 Pin RGB (W/ extension adapter)
Thermal Grease		Dow Corning [®] TC-5121C
Maintenance Kit		100ml coolant, 1g thermal grease
		Shipping information
Barcode	EAN	4713157723864
	UPC	819315023860
Box Dimension		461 x 206 x 138 mm
Gross Weight / unit		2.95 kg
Carton Dimension		476 x 430 x 306 mm
Q'ty / carton		4 PCS
Gross Weight / Carton		12.2 kg



© 2020 ENERMAX TECHNOLOGY CORPORATION. All rights reserved. Specifications are subject to change without notice. Content of delivery might differ in different areas or from illustrations. Some trademarks may be claimed as the property of others.