




## Installing the M-LOK Mounting Kit

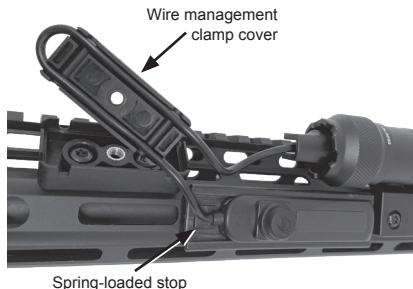

Ensure the safety and security of your weapon before changing the offset mount on the light.

### INSTALL THE OFFSET MOUNT

- Remove existing Picatinny mount from the weapon light with supplied Allen wrench. Discard Allen screws.
- Position mount on the rail where desired and install using the included Torx screws and lock washers.
- Loosen M-LOK fasteners enough to allow the toggle nuts to pass through rail slot.
- Tighten each mounting screw, ensuring toggle nuts turn 90 degrees against slot.

### INSTALL REMOTE PRESSURE SWITCH MOUNT

- Remove existing Picatinny remote pressure switch that came with your LGL-Series weapon light if needed.
- Loosen the M-LOK fasteners on the new pressure pad mount (NS-PIC2) enough to allow

the toggle nuts to pass through the rail slot. Tighten each mounting screw, ensuring toggle nuts turn 90 degrees against slot.

- The pressure pad mount has a spring-loaded stop to hold the RPS in place. To install the switch, push down on the retention stop and slide the RPS fully into place. The pressure pad mount allows the switch to be installed in either direction, depending on your configuration.

### ATTACH WIRE MANAGEMENT CLAMP

- If installed, remove existing Picatinny wire management clamp. To install the new wire management clamp (NS-WM2), first separate the cover from the base with the Torx wrench.
- Loosen both M-LOK fasteners on the base to allow the toggle nuts to pass through rail slot. Tighten each mounting screw, ensuring toggle nuts turn 90 degrees against slot.
- Route the RPS wire through channels in the cover depending on your configuration. Hold to ensure wires stay in the channels while placing the cover onto the base. Tighten cover screw. Note: If the cover does not sit flush, check that the wire is properly set into the channels.
- Tighten the Torx cover screw.

### WARRANTY

#### 2 YEAR WARRANTY

Bayco Products, Inc. warrants this product to be free from defects in workmanship and materials to the original purchaser for 2 year from the date of purchase, and includes the LEDs, housing, lenses, electronics, switches, rechargeable batteries and chargers. Bulbs (other than LEDs) are covered for 90 days from the date of purchase.

We will repair or replace this product should we determine it to be defective. This is the only warranty, expressed or implied, including any warranty of merchantability or fitness for a particular purpose.

For a complete copy of the warranty, go to [www.baycoproducts.com/nightstick-product-support/warranties](http://www.baycoproducts.com/nightstick-product-support/warranties). Retain your receipt for proof of purchase.