


# Platimax D.F.

Power Supply Series



- Compact 160mm with up to 1200W powerful output
- Patented Dust Free Rotation (DFR™) technology for the PSU fan
- D.F. switch for users to activate DFR™ function anytime during operation

Platimax D.F. power supply series is 80 PLUS® Platinum certified in 160mm depth, featuring full modular cable design and stylish individual sleeved cables – SLEEMAX. Moreover, Platimax D.F. is built with ENERMAX patented DFR™ (Dust Free Rotation) technology with smart semi-fanless control ensuring silent operation. Users can activate the DFR™ function at any time during operation through the unique D.F. switch. Platimax D.F. is surely a perfect solution for high-end gaming rigs or multi-GPU systems.




1200W/1050W: 30%

## Features

- 80 PLUS® Platinum Certified**  
Meet 80 PLUS® Platinum standard with 89-93% superb efficiency @ 20-100% load


### High efficiency standard & ECO design

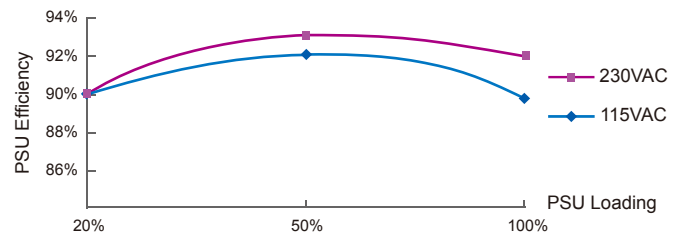

### Dust Free Rotation Tech. (patented)

Dust Free Rotation technology enables the fan to instantly blow away the dust to prolong the lifespan

#### How it works

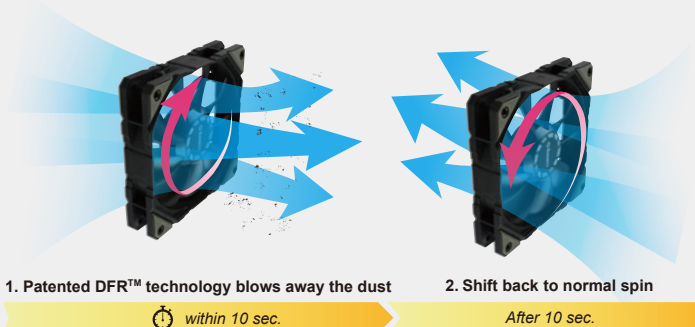

#### Practical application


After 6 months



With DFR™ technology



Without DFR™ technology (more dust accumulates)

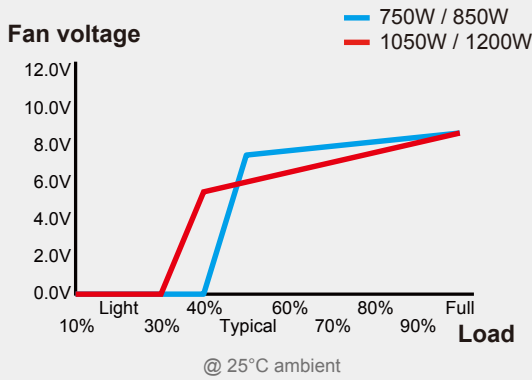

Smart semi-fanless control

Fanless mode before 30%~40% of system load for silent operation. Once surpassing the pre-defined limit, the fan starts to spin and the fan RPM is automatically regulated according to the system load

D.F. switch

The design enables users to activate DFR self-cleaning function at any time during operation





Twister Bearing fan (patented)

13.9cm fan with patented Twister Bearing Technology ensures ultra silent cooling and long lifetime of fan (160,000 hours MTBF)

SLEEMAX

Stylish individual sleeved cable, made with carefully selected fabric to achieve a smooth, soft texture

\*MB / CPU / PCI-E=16AWG (53 strands\*0.176mm)  
\*SATA / 4P Molex=18AWG (34 strands\*0.176mm)

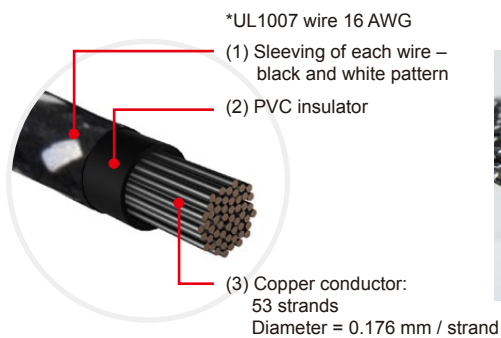

Full modular design & powerful output

Full modular cable design facilitates flexible system installation and cable management. Compact 160mm with up to 1200W powerful output


- 100% 105°C Japanese electrolytic capacitors  
Highest component standards for maximum durability and stability




- Zero load ready!  
DC to DC converter circuit ensures stable output voltage and delivers higher efficiency

- 2014 & 2013 ErP ready!  
<0.5W power consumption at standby mode (with 2013 ErP Lot 6 enabled motherboard). Compliant with 2013 ErP Lot 6 & 2014 ErP Lot 3 standards

PSU +5Vsb efficiency @ 0.045A load, 230VAC



ENERMAX 2013 ErP Lot 6 Compliant PSU





Non 2013 ErP Lot 6 Compliant PSU



- World ready  
100-240VAC auto-adjustment input for universal use. Active PFC with PF value up to 0.99, reducing the reactive power loss to the minimum


- SafeGuard  
Multiple protection circuitry of OCP, OVP, UVP, OTP, OPP, SCP and SIP protects your system

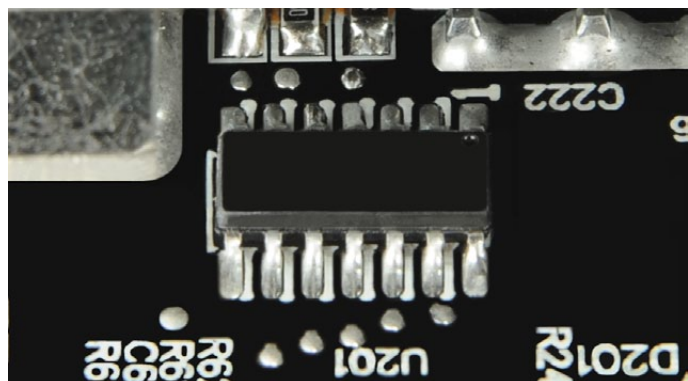

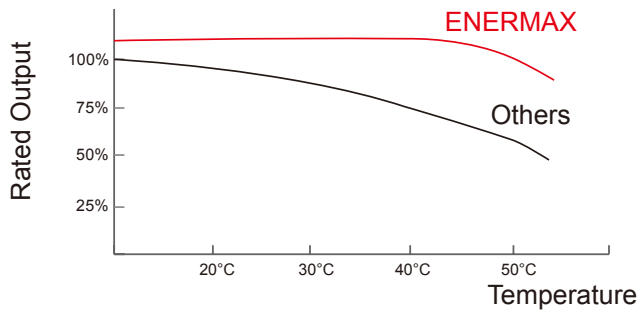


**Fully continuous output @ 50°C**  
Industrial class performance at 50°C ambient


### Dimensions

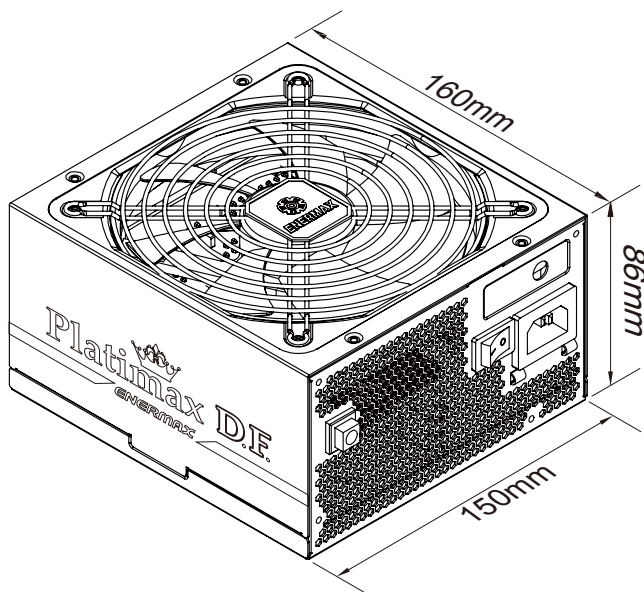

### 12V Rails Distribution

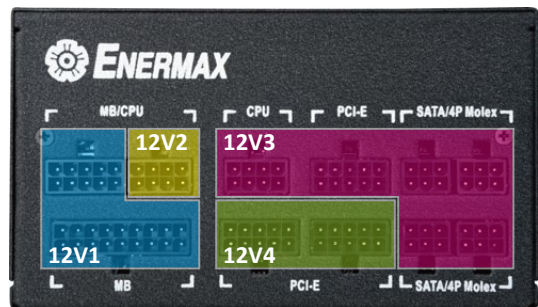

850W / 1050W / 1200W

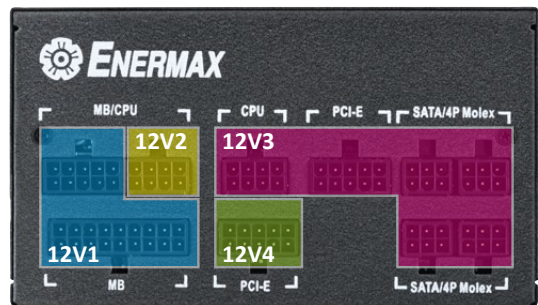


750W

This product incorporates multiple 12V rails over current protection. If you let many peripherals consume the power on only one 12V rail, it may trigger the over current protection and shut down the system. Please re-direct certain peripheral power cable to other 12V rail to share the current loading to ensure highest stability and safety

### Cables & Connectors

Model							
	20+4P (24P) MB	4+4P (8P) CPU	8P CPU	6+2P (8P) PCI-E	SATA	4P Molex	FDD (adapter)
	60cm	70cm	70cm	60cm	50/65/80/95cm	50/65/80/95cm	10cm
EPF750EWT	1	1	1	4	12	4	1
EPF850EWT	1	1	1	6	12	4	1
EPF1050EWT	1	1	1	6	12	4	1
EPF1200EWT	1	1	1	6	12	4	1

## Specifications

Model Number	EPF750EWT		EPF850EWT		EPF1050EWT		EPF1200EWT	
AC Input Voltage	100-240VAC, 47-63Hz							
AC Input Current	10A-5A		12A-6A		13A-6A		15A-7A	
DC Output								
	Rated	Combined	Rated	Combined	Rated	Combined	Rated	Combined
+3.3V	20A	100W	20A	100W	22A	120W	25A	130W
+5V	20A		20A		22A		25A	
+12V1	25A	744W (62A)	25A	840W (70A)	25A	1044W (87A)	25A	1200W (100A)
+12V2	25A		25A		25A		25A	
+12V3	35A		40A		40A		40A	
+12V4	35A		40A		40A		40A	
-12V	0.3A	3.6W	0.3A	3.6W	0.3A	3.6W	0.3A	3.6W
+5Vsb	3A	15W	3A	15W	3A	15W	3A	15W
Total power	750W		850W		1050W		1200W	
Peak power	825W		935W		1155W		1320W	
Dimensions	160(D) x 150(W) x 86(H) mm							
								
<b>Shipping Information</b>								
Model	EPF750EWT		EPF850EWT		EPF1050EWT		EPF1200EWT	
Bar code	EAN	4713157722874	4713157722881	4713157722898	4713157722904			
	UPC	816163009152	816163009169	816163009176	816163009183			
Box dimensions	330(D) x 220(W) x 125(H) mm							
Gross Weight / unit	3.4kg		3.45kg		3.54kg		3.55kg	
Carton dimensions	540(D) x 365(W) x 255(H) mm							
Q'ty / carton	4							
Gross Weight / carton	14.8kg		15kg		15.36kg		15.4kg	