



OLD FASHION FAUCETS
old fashioned style. old fashioned quality

Rubex
RUBINETTERIA



Verona

Finishes

Finish	Part No.
Chrome	850CSA
Brushed Nickel	853CSA
Polished Brass	N/A
Oil Rub Bronze	N/A

Options

Option	Part No.
Faucet Body Only	850CSA
	853CSA
	N/A
	N/A
w/ S-Unions	850CSA
	853CSA
	N/A
	N/A
w/ Pillars	850CSA-P
	853CSA-P
	N/A
	N/A
w/ 31.5" risers no shut offs	850CSA-9650
	853CSA-9653
	N/A
	N/A
w/ 31.5" risers w/ shutoffs	Call for part no.
	Call for part no.
	N/A
w/ 37.5" risers w/ shutoffs	Call for part no.
	Call for part no.
	N/A
	N/A

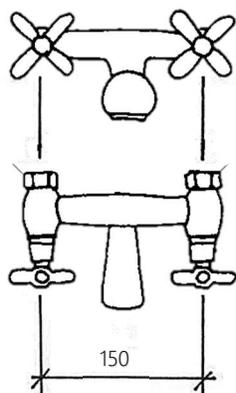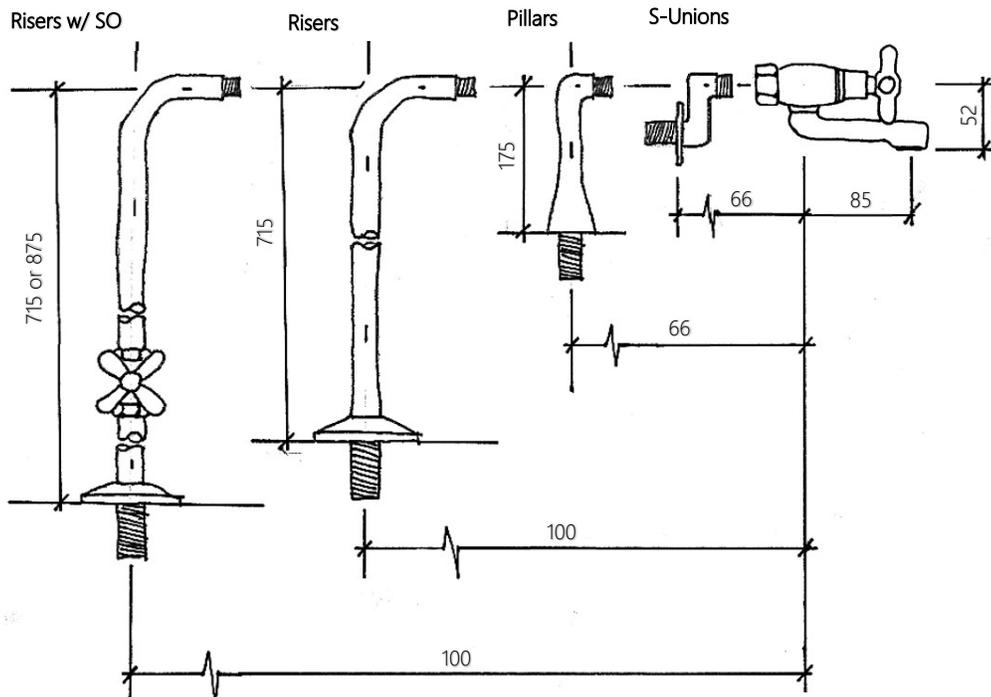

Care and Maintenance

Minimum maintenance is required to maintain product finish. With proper maintenance your Rubex faucet will continually look like new. Special care should be taken when cleaning your faucet and the following suggestions will help extend your faucet life

- A. Cleaning should be done regularly using a soft cotton cloth and warm water; then towel dry
- B. Do not use cleaners that contain abrasives or harsh chemicals; care should be taken in selecting cleaning supplies. Many cleaners contain detergents, ammonia, or other corrosive solvents that could damage your faucet finish.
- C. Occasionally clean with a non-abrasive wax polish

Warranty

Old Fashion Faucets warrants the original purchase for a LIMITED LIFE TIME from original purchase that the product will be free of any manufacturing defects. Product will be replaced at no charge provided it has been installed in accordance to the attached installation instruction, used as recommended and not damaged due to misuse, abuse, faulty maintenance, accident, or other damage. Old Fashion Faucets is not responsible for replacement labour costs, or shipping charges, or damage incurred during installation, transportation, removal, repair, or replacements. All warranty claims are to be made to sales@oldfashionfaucets.com and shall be accompanied by the original purchase receipt and photographs of the damage.

Installation Instruction

Note:

1. In order to comply with CSA Regulation B125; the faucet must be installed so spout outlet is not less than 1" above tub lip.



S-Unions

1. Attach the S-Union to the Tub with flat Metal Washer and 1/2" thin nut. Make sure that Escutcheon is tight against S-Union arm (hand tighten only).
 2. Attach Faucet to S-Union {3/4" Fiber Washers must be in between} and adjust Faucet so straight and level. Now tighten Faucet Nuts and then 1/2" thin Nuts on S-Union.
 3. Install 1/2" Brass Extension and 1/2" Rubber Washer to back of S-Union {this changes the round thread to pipe thread if required.} If hooking up to Plastic lines (ect: ipex) no extension is required.
 4. Attach water supply {pipe soap recommended}. Must have Hot & Cold. Watts Series #7 is recommended for CSA approvals.
 5. Install Shower Hose (11) to Vacuum Breaker (10) on Cradle (8) and Shower Head (12) to Hose (11) (make sure to use 1/2" Rubber Washers in between).
- !!!!IMPORTANT!!!**
6. Once installed, remove Aerator and flush Faucet and lines. This will remove any debris that may be trapped.



Pillars

1. Attach the Pillars to the Tub with flat Metal Washer and 1/2" thin nut.
 2. Attach Faucet to Pillar {3/4" Fiber Washers must be in between}. Now tighten Faucet Nuts and then 1/2" thin Nuts on Pillar.
 3. Attach water supply {pipe soap recommended}. Must have Hot & Cold. Watts Series #7 is recommended for CSA approvals.
 4. Install Shower Hose (11) to Vacuum Breaker (10) on Cradle (8) and Shower Head (12) to Hose (11) (make sure to use 1/2" Rubber Washers in between).
- !!!!IMPORTANT!!!**
5. Once installed, remove Aerator and flush Faucet and lines. This will remove any debris that may be trapped.



Riser Tubes-

1. Thread Brass 3/4" x 1/2" Nipple to Water Supply in the floor.
 2. Insert 3/4" Fiber Washers between Brass nipple and Riser Tubes.
 3. Place Escutcheon on the Riser Tube by treading up from the bottom of the tube.
 4. Thread Riser Tube to the nipple attached to the Water Line, and secure the tube to the floor using 3/4" nuts to attach on both end and top of threading below the Escutcheon of the Riser Tube.
 5. Thread Escutcheon into place against the floor.
- !!!!IMPORTANT!!!**
6. Once installed, remove Aerator and flush Faucet and lines. This will remove any debris that may be trapped.

Note: Riser Tubes with sweat nipple are required to be soldered to the water supply line. If thread only, use a pex connector or available nipple with kit to connect to water supply.

Parts Breakdown

1. 2200X-1060S

Seat

2. 2200X-1060N

Seat Nut 3/4"

3. 850-07146R

Compression Cartridge

4. 850-07146R

Compression Cartridge

5. 800-6200F

Cartridge Flange Cover

6. 2200X-6200

Cross Handles


7. 2200X-6200RB

Index Button and Ring (Pair)

8. 2200X-1064

Black ABS Aerator

Please note faucet finish when ordering parts, part numbers shown are for chrome finish and may vary.

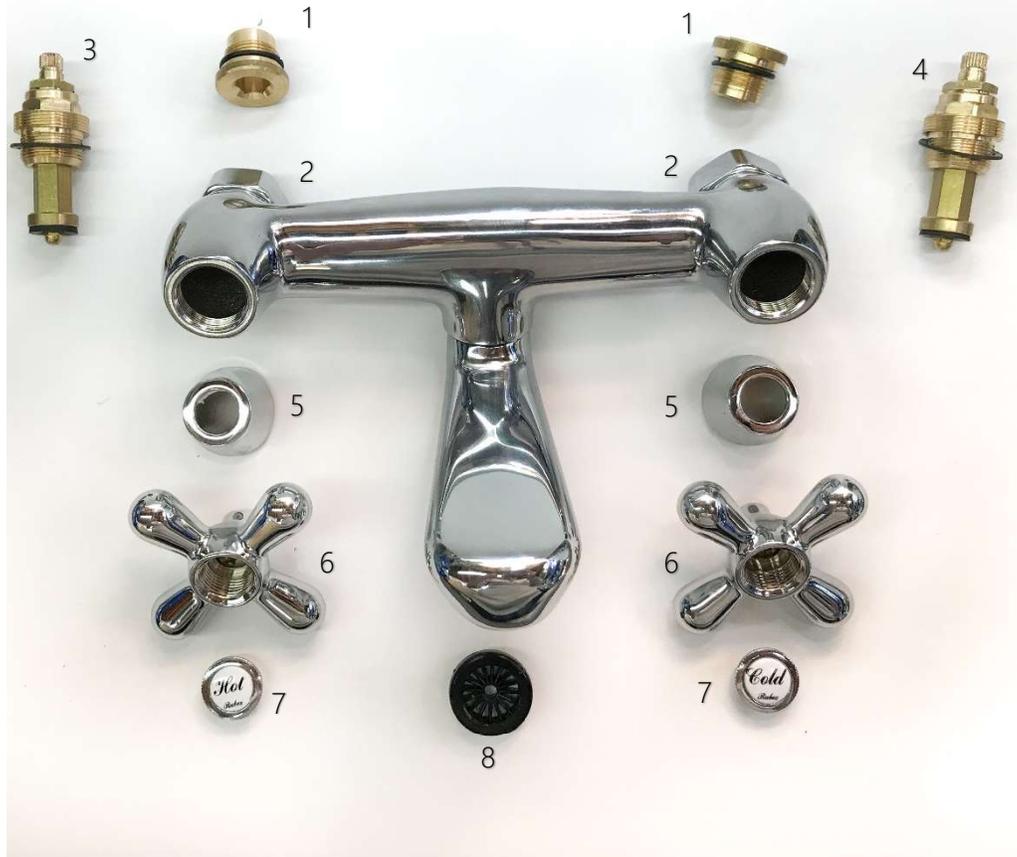

Cartridge Types

The 850 series faucet has gone through 3 notable renditions of cartridge style. It is recommended to remove the cartridge from your faucet and compare to the pictures to determine which cartridge is right for you.

C1. 850-07146

Oldest style compression cartridge

C2. 07146R

Most recently changed compression cartridge

8. 850-07146N

Compression cartridge on latest model 850 faucets

