
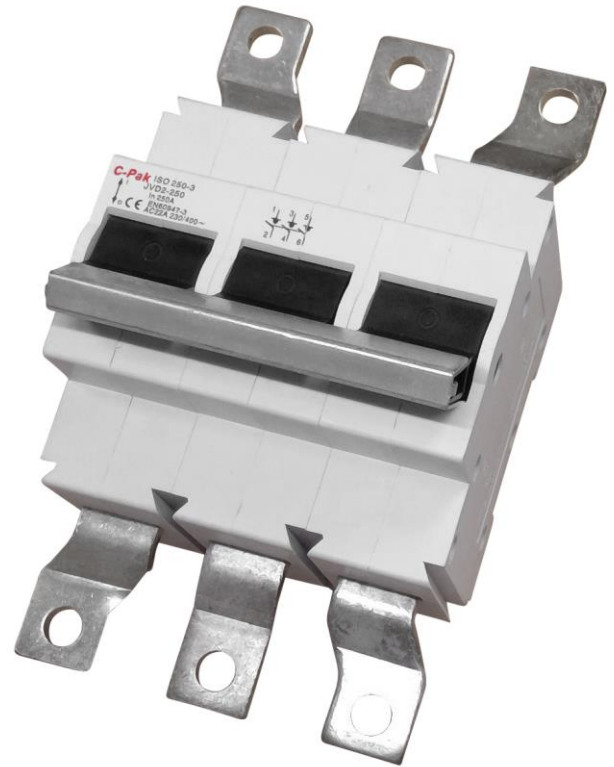
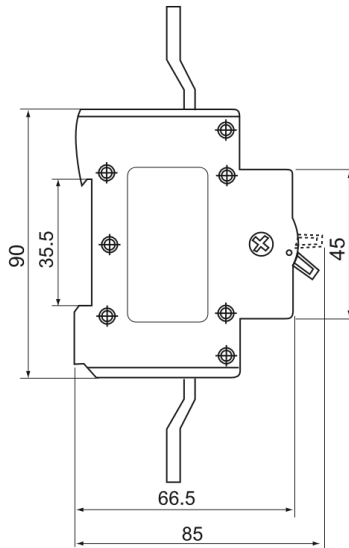


TECHNICAL DATA: ISO 250A 2, 3 & 4 Pole

ISO ISOLATOR 250A TECHNICAL DATA

Product range	ISO 250A
Standard	IEC 60947-3
Certification	CE, SEMKO
Rated current (In)	250A
Rated voltage	240/400V
Rated frequency	50/60Hz
Rated short-circuit capacity	3kA
Rated withstand current	3kA within 1 second
Number of poles	2, 3 & 4
Mounting	35mm DIN rail
Terminal type	Extensional busbar
Terminal capacity	Rigid conductor 50mm ²
Terminal connection height	22mm

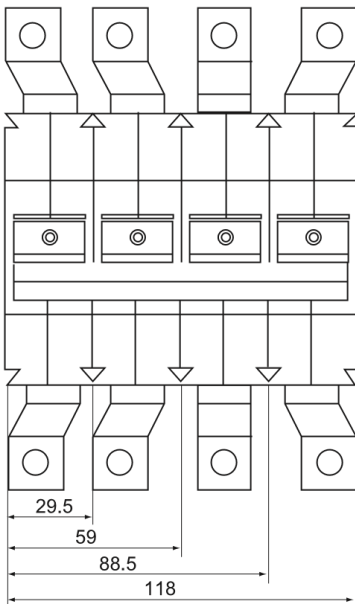

ISO - 250/3

