
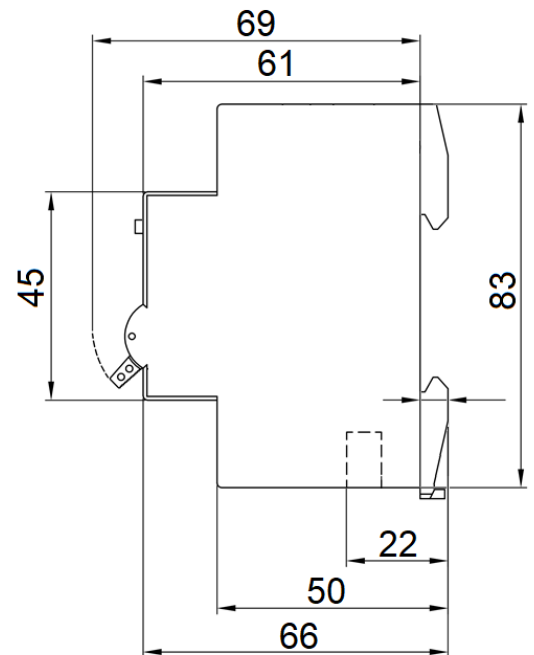


TECHNICAL DATA: RCCB Type A 10-80A 2Pole

TYPE A RCCB 10KA RESIDUAL CURRENT CIRCUIT BREAKER TECHNICAL DATA

Product range	CPRA (RCCB/RCD)
Standard	IEC 61008-1, EN 61008-1
Certification	CE
Rated current (In)	10, 16, 25, 32, 40, 63 & 80A
Rated residual operating current $I_{\Delta n}$	30mA
Standard tripping time $1 \times I_{\Delta n}$	$\leq 300\text{ms}$
Standard tripping time $5 \times I_{\Delta n}$	$\leq 40\text{ms}$
Rated voltage (Ue)	AC 230(240)
Rated frequency	50/60Hz
Rated impulse withstand voltage (Uimp)	4kV
Number of poles	2 (1P+N)
Rated short-circuit capacity (Icn)	10kA
Operating temperature	-25° to 40°C
Humidity	Relative humidity: 91-95% (+20°C - 30°C)
Pollution degree	2
Terminal protection	IP20
Mounting	35mm DIN rail
Terminal type	Funnel and screw clamp
Terminal capacity	1-25mm ²
Recommended terminal torque	2.5Nm

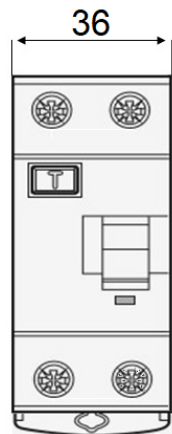

CPRA - 32/2/30

