
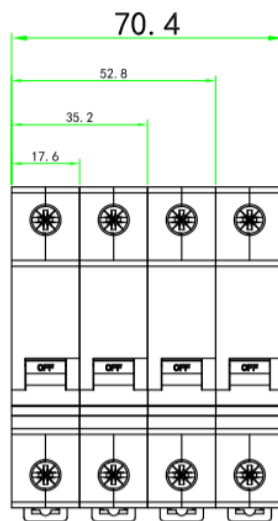


TECHNICAL DATA: ISO 63-125A 2, 3 & 4Pole

ISO ISOLATOR TECHNICAL DATA

Product range	ISO 63-125A
Standard	IEC 60947-3, EN 60947-3
Certification	CE, SEMKO
Rated current (In)	63, 80, 100, 125A Rated
Uninterrupted current (Iu)	63, 80, 100, 125A
Rated operational voltage (Ue)	AC 230(240)/400(415)V
Rated frequency	50/60Hz
Rated impulse withstand voltage (Uimp)	6kV
Icw	1200A
Icm	500A
Number of poles	2, 3 & 4
Rated insulation voltage (Ui)	500V
Utilization category	AC-22B
Operating temperature	-5° to 40°C
Altitude	≤ 2000 metres
Humidity	Relative humidity: +40°C≤50% ; +20°C≤90%
Pollution degree	2
Terminal protection	IP20
Mounting	35mm DIN Rail
Terminal type	Funnel and screw clamp
Terminal capacity	6-35mm ²
Recommended terminal torque	2.5Nm

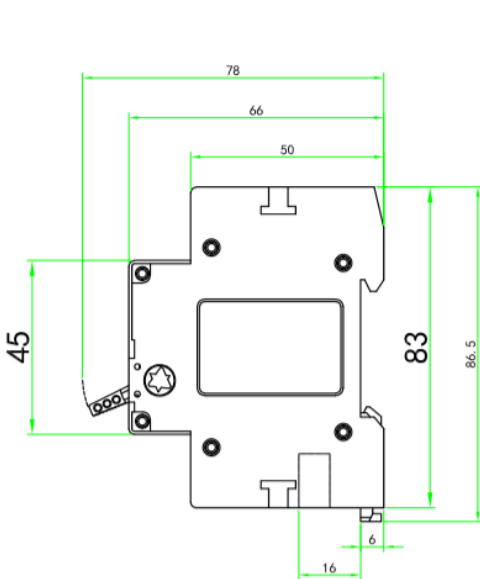

ISO - 63/2

