


FP40615CLN-4 Combine preselector, 15 MHz bandwidth, 865-880 MHz

- Covers the entire 865-880 MHz band
- 1 dB insertion loss over the passband
- N-female connectors
- 50 dB attenuation 23 MHz away from center frequency

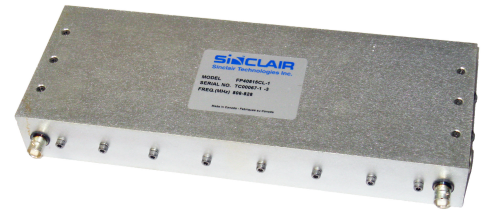

www.sinclaire.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinclaire.com	salesuk@sinclaire.com	salesla@sinclaire.com	salescan@sinclaire.com
Product Specification Sheet EPR 016141		FP40615CLN-4	Issue: 1	Dated: 27-08-15 Dated: 16-01-11

### Electrical Specifications

Frequency Range	MHz	865 to 880
Pass band Insertion Loss (max)	dB	1
Input VSWR (max)		1.5:1
Impedance	Ω	50
Average Power Input (max)	W	50
Input Connectors		N-Female
Output Connectors		N-Female

### Notes

\*1 : To mount onto tray

### Mechanical Specifications

Width	in (mm)	8.6 (218)
Depth	in (mm)	4.75 (121)
Length/ Height	in (mm)	1.5 (38)
Mounting configurations		Mounting holes provided *1

### Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com