
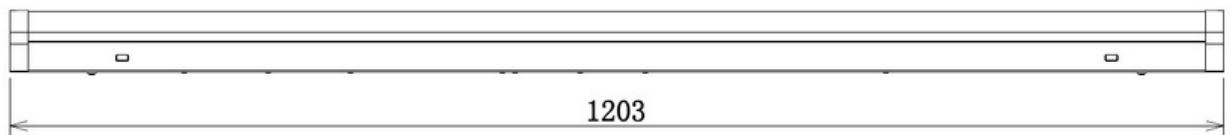


BE Series

EMERGENCY LED BATTEN 40W/3W 1200MM

Integrated Power's BE Series surface mounted LED battens are an economic and reliable LED option. They are perfect for offices, passageways, stairwells and more. Their wide beam distribution make them the ideal fluorescent alternative when upgrading existing lighting.



SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4

Features

- Wide beam SMD LED technology
- High lumen efficiency
- Surface mountable
- Large terminal block for easy fit off
- Install friendly design
- Tri colour selectable
- AS/NZS 2293.3 compliant
- Replaces 2x 36W Fluoro

Applications

- Offices
- Schools
- Workshops
- Stairwells
- Bathrooms
- Hotels



Standard Specifications

- Input Voltage: 200-240Vac
- Rated Input Power: 40W (Mains)
- Emergency Power: 3.5W ± 0.5W (Emerg)
- Battery Type: LiFePO4 6.4V 1500mAh
- Duration: 3hrs @ 3.5W
- Lumen Output: 4000lm - 4400lm
- CRI Rating: CRI>80
- Beam Angle: 120°
- C0 Classification: D50
- C90 Classification: D25
- IP Rating: IP20
- IK Rating: IK08
- Fitting Weight: 1.7kg

Option List

- DALI Driver / DALI

Models List

White / 3CCT / 1200MM

BEE40WHXKN01

Accessories

IES Files

IES BE40WHXKN01 40W 4000K

