


DL Series

TRI-COLOUR LED DOWNLIGHT - 25W



Integrated Powers DL Series LED downlights offer high spec features in a compact, stylish fitting. With great colour rendition (CRI 80+) and compatibility with a wide range of Australian dimmers, they are the perfect choice for a wide range of lighting applications.

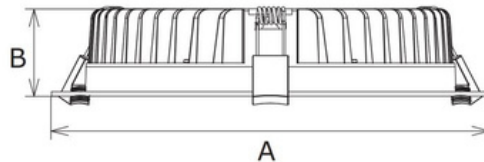

Size & Cutout

(AxBmm)

(mm)

ø190x45

ø160-170



Features

- Wide beam SMD LED technology
- High output LED chips
- Mains dimmable driver
- IP 54 when installed
- Colour selectable

Applications

- Residential
- Offices
- Foyers
- Passageways
- Bathrooms



Standard Specifications

- Rated Input Power: 25W
- Lumen Output: 2130lm - 2630lm
- Beam Angle: 90°
- Colour Temperature: 3000K / 4000K / 5700K
- CRI Rating: CRI>80
- SDCM Rating: <5 (lower bins available)
- IP Rating: IP54
- Cutout: 170-160mm
- Dimension: Ø190*40mm

Option List

- DALI Dimming / DALI
- Greenstar Specification/ GS

Models List

White / 3CCT Selectable

DL25WHXKD01

Accessories

25W White Adaptor Ring - 240mm	DLADP03
25W White Adaptor Ring - 268mm	DLADP04
Indoor Sensor - Surface Mount	SE1WHN01
Indoor Sensor - Recessed Mount	SE1WHN02
Indoor Sensor - Presence Surface	SE1WHN03
Indoor Sensor - High Ceiling	SE1WHN04
Outdoor Sensor - Microwave	SE1WHN05
Outdoor Sensor - Infrared	SE1WHN06

IES Files

IES DL25WH3KD01 25W 3000K
IES DL25WH4KD01 25W 4000K
IES DL25WH5KD01 25W 5700K

