

300HC Flush Mount Magnetic Lock

A. 12VDC Input:

- Connect the ground(-) lead from a 12VDC power source to terminal 2.
- Connect the positive(+) lead from a 12VDC power source to terminal 1.
- Check jumper for 12VDC operation.


B. 24VDC input:

- Connect the ground(-) lead from a 24VDC power source to terminal 2.
- Connect the positive(+) lead from a 24VDC power source to terminal 1.
- Check jumper for 24VDC operation.

C: Contacts:

Reed switch dry contacts are rated 0.5 Amp at 30VDC for safe operation, do not exceed this rating. If you require a normally open switch, connect the wires from the system to terminal 4 and terminal 3. If you require a normally closed switch, connect the wires from the system to terminal 4 and terminal 5.


Print Circuit Board Schematic

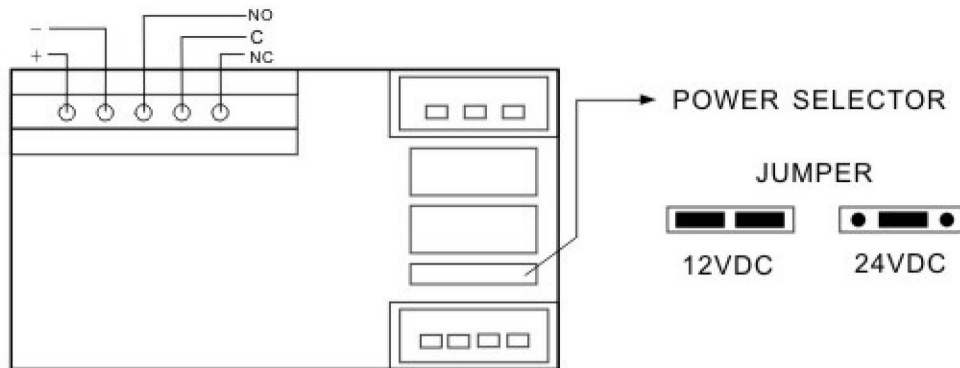

Important: Please Read Before Attempting To Install Magnetic Lock

- A. Handle the equipment with care, damaging the mating surface of the magnet or armature plate may reduce locking efficiency.
- B. The magnet mounts rigidly to the door frame, The armature plate mounts to the door with hardware. Kit provided that allows it to pivot about its center to compensate for door in its normally closed position.
- C. Template use must take place with the door in its normally closed position.
- D. Before installing, please add the threadlocker to all screws. Firmly tighten the screws to avoid fastening loosen.

Installation Instructions:

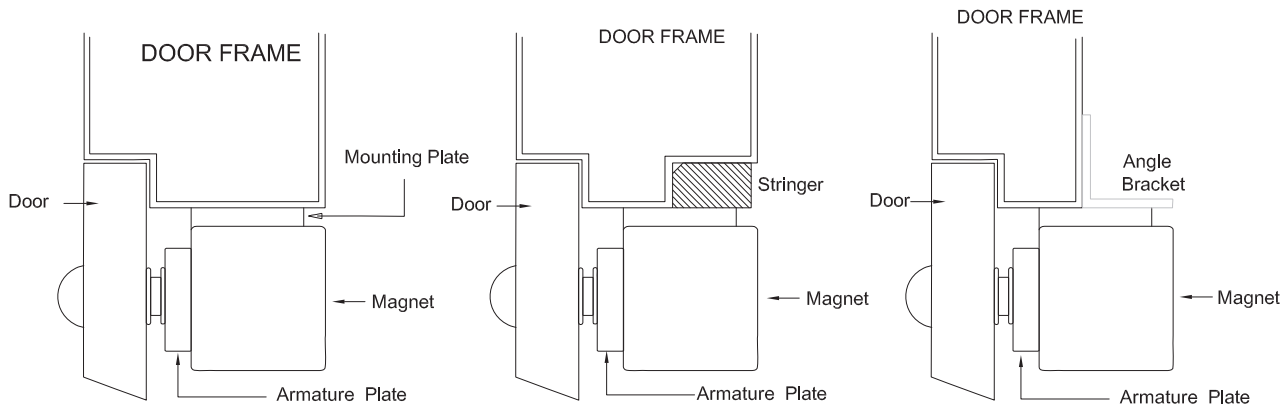

300HC Flush Mount Magnetic Lock

Installation Instructions:

