


Premiere Series

CASAMBI RGBW LED FLOODLIGHT 150W - SILVER



The Premiere Series of LED floodlights by Integrated Power brings you into the world of colour controlled smart lighting. Compatible with multiple smart control systems such as Casambi, DMX and more. The wide range of optics make even the most challenging projects possible. Available in RGBW, RGB and Tuneable White.

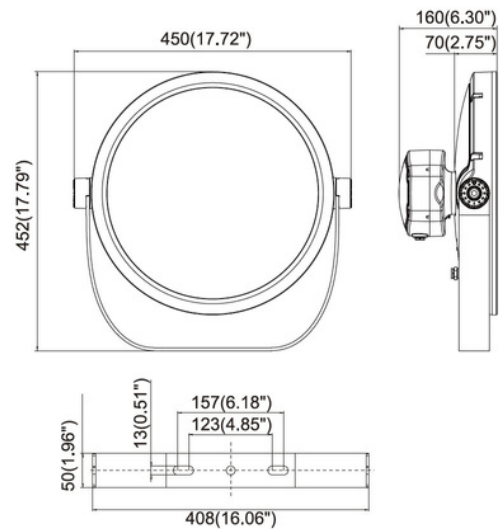

Features

- Heavy duty construction
- High quality LED chips
- Wide range of optics
- Casambi enabled
- Clear lens standard
- Honeycomb lens option ** (excludes 3.8° and 8° narrow optics)
- Adjustable bracket included
- RGB & Tuneable white models available

Applications

- Facades
- Bridges
- Sports Arenas
- Special Events
- Advertising
- Signage
- Commercial Buildings
- Landscapes



Standard Specifications

- Rated Input Power: 150W / 240 Vac
- Lumen Output: 15,000lm (clear lens)
- Lumen Output: 10,500lm (honeycomb lens)
- Colour Temp: RGBW (2200K)
- CRI Rating: CRI>80
- Operating Temperature: -30/+50°C
- EPA (Sail Area): 0.12m²
- Service Life: L70 / 77,000hrs
- IP Rating: IP66
- IK Rating: IK08
- Fitting weight: 10.0kg ± 0.3kg
- Casambi Control

Option List

- DC Input Power /DCV
- White CCT options * /3000K/ 4000K/ 5000K
- Honeycomb Lens /HCL

Models List

Silver / RGBW / 3.8 Degree Optic	PSC150SIRGBW03
Silver / RGBW / 8 Degree Optic	PSC150SIRGBW08
Silver / RGBW / 12 Degree Optic	PSC150SIRGBW12
Silver / RGBW / 30 Degree Optic	PSC150SIRGBW30
Silver / RGBW / 60 Degree Optic	PSC150SIRGBW60
Silver / RGBW / 75 Degree Optic	PSC150SIRGBW75
Silver / RGBW / 15x30 Degree Optic	PSC150SIRGBW1530
Silver / RGBW / 20x60 Degree Optic	PSC150SIRGBW2060

Accessories

Visor / Glare Shield	PS150VISOR
----------------------	------------

*Casambi Installation

Casambi control is achieved through an external Casambi device connecting to the DMX control cable which will require a separate housing (not supplied).

IES Files

IES PS150SIRGBW03 150W 3.8deg
IES PS150SIRGBW08 150W 8deg
IES PS150SIRGBW12 150W 12deg
IES PS150SIRGBW30 150W 30deg
IES PS150SIRGBW60 150W 60deg
IES PS150SIRGBW75 150W 75deg
IES PS150SIRGBW1530 150W 15x30deg
IES PS150SIRGBW2060 150W 20x60deg

