

1103 PM Fused Coupler

C3900-P



3x3 780 nm PM Fused Coupler, 33/33/33

The coupler can offers high power handling, low insertion loss and high stability & reliability. It can be used for fiber sensor, power monitor and coherent communication.


FEATURES

- High Power Handling
- Low Insertion Loss
- High Stability & Reliability

USE IN

- Coherent Communication
- Power Monitor
- Fiber Sensor

MECHANICAL DRAWING

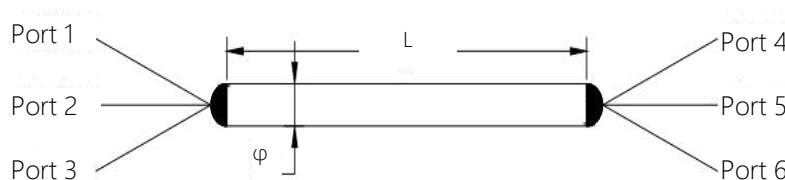

Center Wavelength	780 nm
Operating Bandwidth	±10 nm
Excess Loss	1.2 dB max.
Extinction Ratio	18 dB min.
Splitting Ratio	33%:33%:33%
Splitting Ratio Tolerance	±4%
Directivity	50 dB min.
Return Loss	50 dB min.
Power Handling	2 W max.
Fiber Type	PM Panda Fiber
Dimension	Bare Fiber 3x3x54 mm 900 um Loose Tube 4x4x70 mm
Operating Temperature	-5°C to +70°C
Storage Temperature	-40°C to +85°C
Axis Alignment	Both Axis Working

* With connectors, the handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.