


Premiere Series

CASAMBI RGB LED FLOODLIGHT SILVER 35W



The Premiere Series of LED floodlights by Integrated Power brings you into the world of colour controlled smart lighting. Compatible with multiple smart control systems such as Casambi, DMX and more. The wide range of optics make even the most challenging projects possible. Available in RGBW, RGB and Tuneable White.

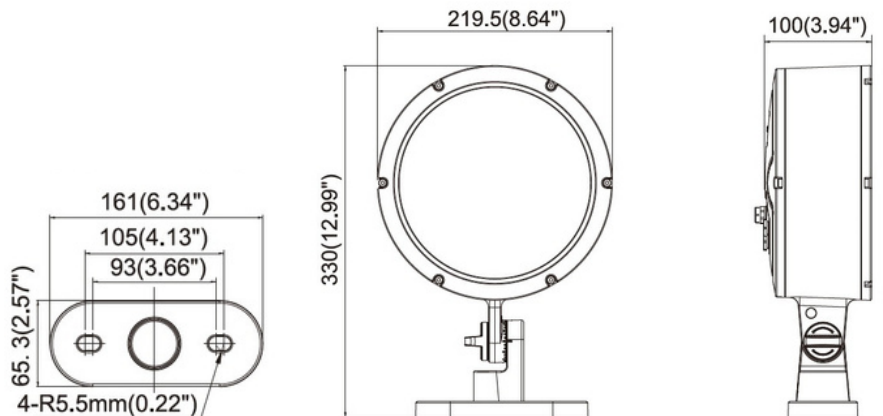

Features

- Heavy duty construction
- High quality LED chips
- Wide range of optics
- Casambi enabled
- Clear lens standard
- Honeycomb lens (excludes 3.8° and 8° narrow optics)
- Adjustable bracket included
- RGBW & Tuneable white models available

Applications

- Facades
- Bridges
- Sports Arenas
- Special Events
- Advertising
- Signage
- Commercial Buildings
- Landscapes



Standard Specifications

- Rated Input Power: 35W / 240Vac
- Lumen Output: 3,500lm (clear lens)
- Lumen Output: 2,450lm (honeycomb lens)
- Colour Temp: RGB
- CRI Rating: CRI>80
- Operating Temperature: -30/+50°C
- EPA (Sail Area): 0.04m²
- Service Life: L70 / 77,000hrs
- IP Rating: IP66
- IK Rating: IK08
- Fitting weight: 3.7kg ± 0.3kg
- Casambi Control *

Option List

- DC Input Power/DCV
- Honeycomb Lens/HCL

Models List

Silver / RGB / 3.8 Degree Optic	PSC35SIRGB03
Silver / RGB / 8 Degree Optic	PSC35SIRGB08
Silver / RGB / 12 Degree Optic	PSC35SIRGB12
Silver / RGB / 30 Degree Optic	PSC35SIRGB30
Silver RGB / 60 Degree Optic	PSC35SIRGB60
Silver / RGB / 75 Degree Optic	PSC35SIRGB75
Silver / RGB / 15x30 Degree Optic	PSC35SIRGB1530
Silver / RGB / 20x60 Degree Optic	PSC35SIRGB2060

Accessories

Visor / Glare Shield PS35VISOR

*Casambi Installation

Casambi control is achieved through an external Casambi device connecting to the DMX control cable which will require a separate housing (not supplied).

IES Files

IES PS35SIRGB03 35W 3.8deg
IES PS35SIRGB08 35W 8deg
IES PS35SIRGB12 35W 12deg
IES PS35SIRGB30 35W 30deg
IES PS35SIRGB60 35W 60deg
IES PS35SIRGB75 35W 75deg
IES PS35SIRGB1530 35W 15x30deg
IES PS35SIRGB2060 35W 20x60deg

