




Thank you for using smart camera

1. Install APP

Download "SIGN Smart Home" app from APP store or Google Play. Register and login: open the "SIGN Smart Home" APP to register and login according to the prompts.

2. Product Introduction

Packing list: Smart Camera x 1, Manual x 1, USB Power Cord x 1, Power Adapter x 1, Screw Accessories Package x 1




Smart Camera




Screw Accessories Package



USB Power Cord



Manual



Power Adapter

Basic Parameters

Product Name: Smart Camera
 Pixel: 1.0Mp/2.0MP
 Video Compression: H.264 High Profile
 Image Enhancement: Digital Wide Dynamic 3D Noise Reduction
 Local Storage: Micro TF card
 Wireless Encryption: WEP/WPA/WPA2 Encryption
 Power Input: 5V 1A(Min)
 Total Power Consumption: 5W (Max)
 Wireless Standard: 2.4G 802.11 b/g/n
 Support Platform: Android/iOS


Component Description:

Reset Button: Long press "reset" hole 5sec, reset success.


It is recommended to insert 8-64GB high-speed Micro TF card, otherwise it will not be able to store, view historical video and support important functions such as firmware upgrading.

3.1. Add The Device-Scan QR code mode


- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "SIGN Smart Home" APP, press the '+' in the upper right corner of the main screen (Figure 01); choose "Security & Sensor", click "Smart Camera" (Figure 02) to add camera; and then click "Next step" (Figure 03);

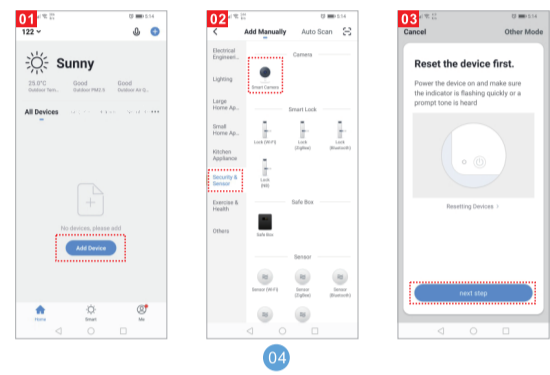


- If the mobile phone is not connected to wi-fi, please click "Connect to Wi-Fi" (Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05). Please note that only 2.4 GH Wi-Fi network is supported;
- If the phone is connected to Wi-Fi (Figure 06);

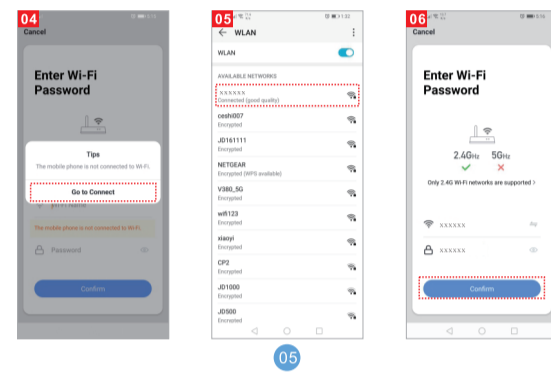

- click "Confirm". It will jump to the interface to prompt to scan the QR code with camera and click "Continue" (Figure, 07);
- A QR code will prompt on your screen and you need to scan it with the Smart Camera. (the camera is about 20-30 cm away from the mobile phone lens). Then click "hear the prompt sound" (Figure, 08).
- "connecting" (Figure, 09);

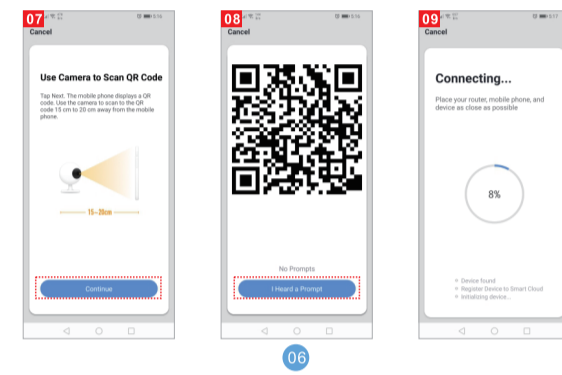


- When the progress reaches 100%, connection completed (Figure 13), and click "Finish";
- Then jump to preview interface (Figure 11)
- After closing the device preview interface, the interface returns to the APP home page. At this time, the connected device will appear on the APP home page (Figure 14). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

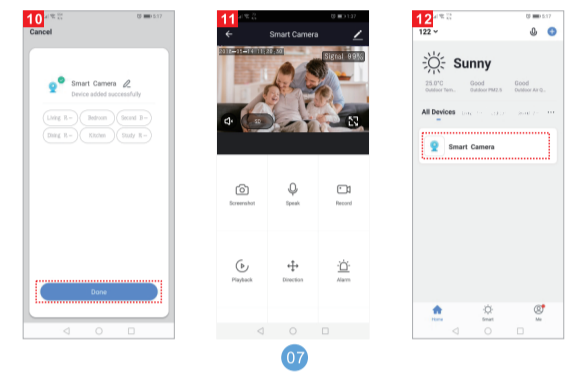


3.2. Add The Device-AP Mode

- If you want to use AP Mode, press the reset button on the machine
- Make sure Wi-Fi is available and connected to the Internet.
 - Connect the camera to the power, system startup completed.
 - Open "SIGN Smart Home" APP, press the '+' in the upper right corner of the main screen (Figure 13); choose "Security & Sensor", click "Smart Camera" (Figure 14) to add camera; Alternatively, choose "other ways" to add (as shown in Figure 15);

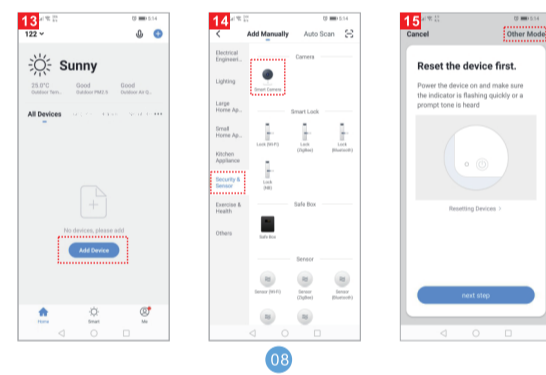


Note: Before using the "AP Mode", you need to switch to "AP Mode" by lightly pressing the "Reset key" of the device.


- Then click "hot spot configuration" (Figure 16);
- Then click "compatibility mode", clicks "Next" (Figure 17);
- Then click "change Network" (Figure 18);

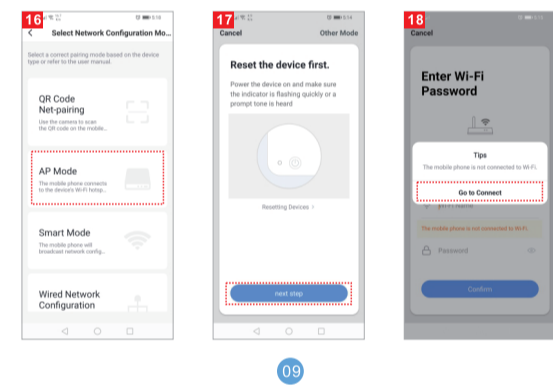


- Then enter the password to complete the connection (Figure 19);
- Click Back and return to the APP compatible mode interface, where the Wi-Fi name and the connected Wi-Fi name are displayed Password, click the "Confirm" button (Figure 20);
- The page jumps to where the interface prompts "Wi-Fi" to connect to the device hotspot and clicks "Connect" (Figure 21)

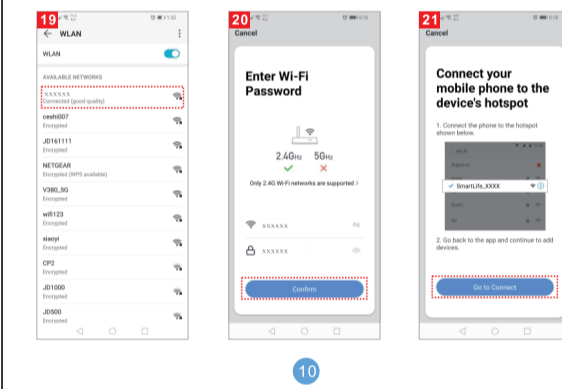


- The interface jumps to the WALN connection interface, finds the Wi-Fi at the beginning of "Smart Lifi", and clicks on the connection (Figure 22);
- When the connection is completed, click back and return to the APP interface, at which time the APP display device is connected (Figure 23).
- At this time, the device has been successfully connected; the interface jumps to "Add Device Successful" (Figure 24);

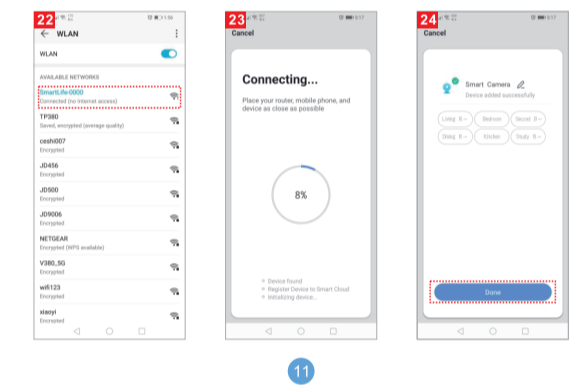

- Then click "connected", it will jump to the Preview Interface of the Device (Figure 25)
- Close the device preview interface and the interface returns to the APP home page, at which point the connected device will appear on the APP home page. (Fig. 26). After entering the device interface to view, no need to re-add, click directly into the device interface to view.

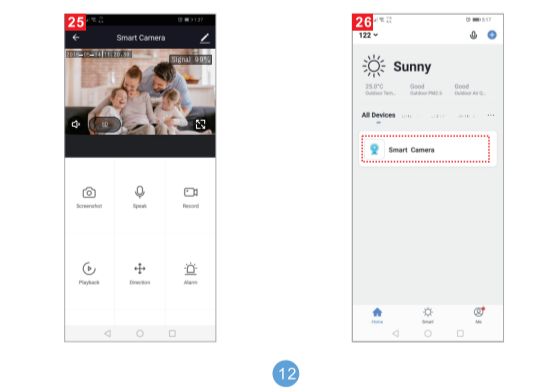

4. APP Video Browsing Details

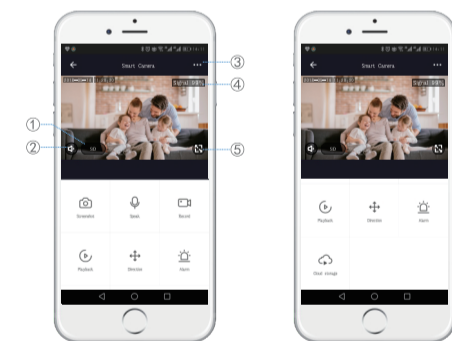

- ①Preview mode
- ②Monitor Switch
- ③About device
- ④SQ
- ⑤Full screen

5. Matters Need Attention

Try to keep away from the metal space;
 Avoid the furniture, microwave oven blocked;
 Avoid the space where the audio, video and data lines are wound, and keep the space away from them as large as possible;
 Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment:
 In the new network environment, please press the reset hole about 5 seconds, then connect to the network.

The name and content of the harmful substances in the product

Part Name	Harmful Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
shell	○	○	○	○	○	○
Board	X	○	○	○	○	○
charger	○	○	○	○	○	○
annex	○	○	○	○	○	○

This form is based on the provisions of SJ/T 11364.

This product conforms to RoHS environmental protection requirements. At present, there is no mature technology in the world to replace or reduce the lead content in the electronic ceramics, porcelain, optical glass, steel and copper alloy.

Spares Nordic AB
 Fagerbergsgatan 7
 163 53 Spånga, Sweden
 CE FC

Maintenance records: _____
 Maintenance time: _____
 Fault conditions: _____
 Fault cause: _____
 Troubleshooting: _____
 Return and exchange proof: _____
 Date of validity: _____
 Original device ID: _____
 New device ID: _____
 maintenance personnel signature: _____
 Maintenance Department seal: _____

Maintenance voucher of intelligent
 Customer: _____ Mobile: _____
 Address: _____
 Model: _____ Camera ID: _____
 Device store: _____ Date of purchase: _____
 Store address: _____
 Store contact number: _____

Maintenance voucher of intelligent
 Customer: _____ Mobile: _____
 Address: _____
 Model: _____ Camera ID: _____
 Device store: _____ Date of purchase: _____
 Store address: _____
 Store contact number: _____