WE.LOCK

PCB10KEY32
Instruction
English

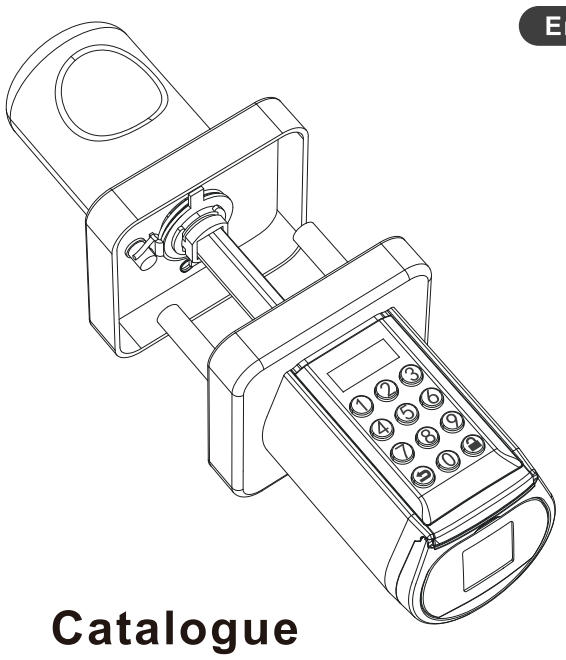

Catalogue

- Part list figure 01
- Accessories list(TOOL BOX).....02
- Install battery 03
  Operating instruction
- Unlock and lock 04
  Uresetting diagram
- Installation diagram 05
- Passcode:Flow chart.....06
- RFID card:Flow chart
- Other settings:Flow chart
- Applicable size 08
  Product Introductio
- Bluetooth activation and login instructions 09
  Log in to the app
- Bind the device 10
- Specifications 11
  FAQ

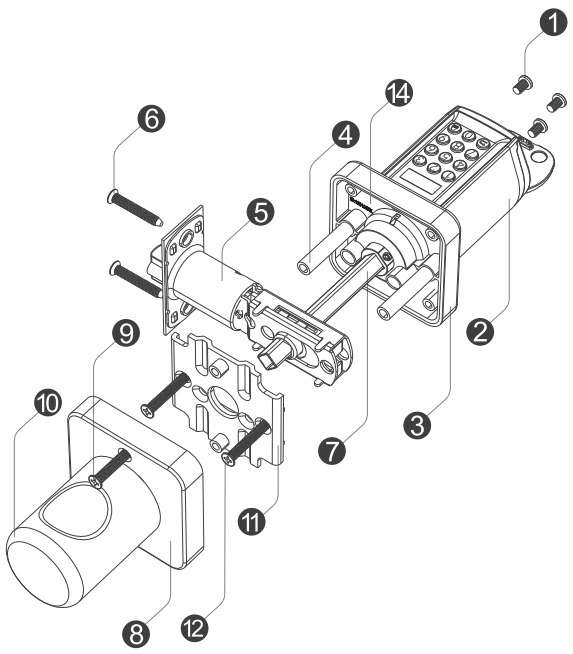

PART LIST FIGURE

1. Screws for battery compartment
2. Front Handle
3. Front Panel
4. Screw casing
5. Lockbody
6. Screws for lock body
7. Toggle lever
8. Rear Panel
9. Screws for rear Panel
10. Rear handle
11. Mounting bracket
12. Mounting bracket screw
14. Product ID

Accessories list(TOOL BOX)


Single latch lock body*1


Gusset*1


Stickers*2
(Used to cover the door hole)


Mounting bracket*1


KEY*2



Fixing screw*14


Phillips screwdriver & Thimble


RFID Card*3


Battery installation
assistance tool*1



Product ID*1 Manual*1

Install battery

1. Insert the battery installation assistance tool and rotate to open the battery compartment cover



2.Install battery



3.Open the silicone cover



4.Tighten the screws

Operating instruction

1) Enter the wrong passcode 5 times continuously, the system is locked for three minutes and cannot operate.

2) Press to wake up the keyboard+10 digits temporary passcodeEnter the wrong passcode 5 times continuously, the system is locked for three minutes and the cannot operate.Temporary passcode generation needs to be done in the App.The time on the screen should be the same as the time on the phone,otherwise the temporary passcode will be invalid

3) Press to wake up the keyboard+swipe the IC cards Swipe the unmatched card 5 times continuously,the system is lockd for three minutes and the cannot operate.Any IC card can unlpock the door in factory state.

4) Bind the lock on APP
Bind the lock on APP via Bluetooth, click "unlock" , and the phone yime will be synchronized to the lock via Bluetooth.

Unlock and lock

Unlock the door from outside You can unlock the door in any direction

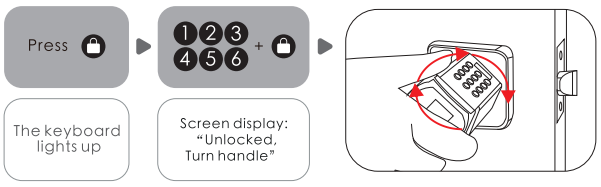

The keyboard lights up

Screen display: "Unlocked, Turn handle"

The rear handle can be turned left or right 90° .

To protect the lock not be damaged by torsion forcefully



Uresetting diagram



1.Opening the silicone cover

2. Find the Thimble in the attached accessories



3.Find the hole where the reset button is located



4.Insert the thimble into the hole and press the reset button

Installation diagram

2.1 Picture of installation Inward opening door:The inclined surface of the bolt face outwards when installing



1.The length of the lock body can be adjusted according to the diameter of the keyhole



2.Install the lock body and tighten the screws



3.Place the lock bodyand tighten the screws



4.Install outdoor



5.Install the mounting bracket and tighten the mounting bracket screws



6.Install the rear panel handle and tighten the screws

1.Passcode:Flow chart

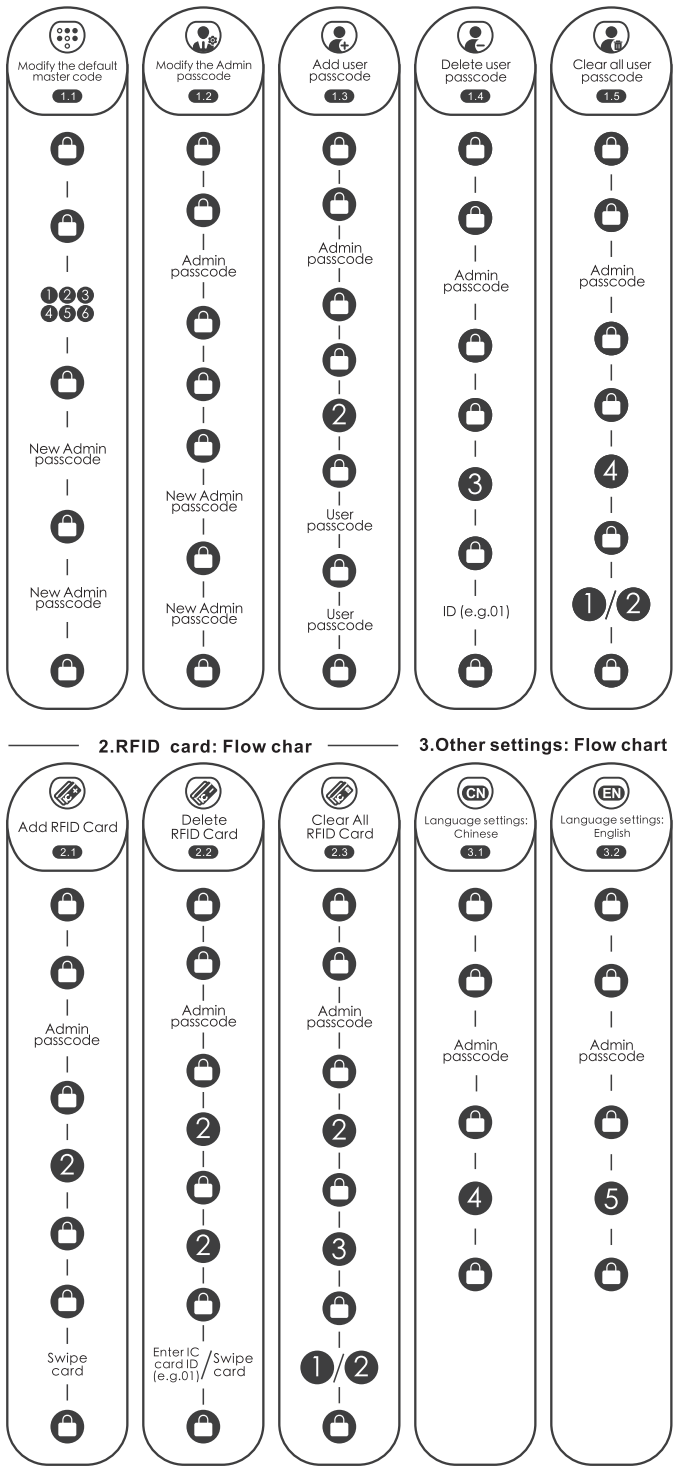

2.RFID card: Flow char

3.Other settings: Flow chart

3.Other settings: Flow chart

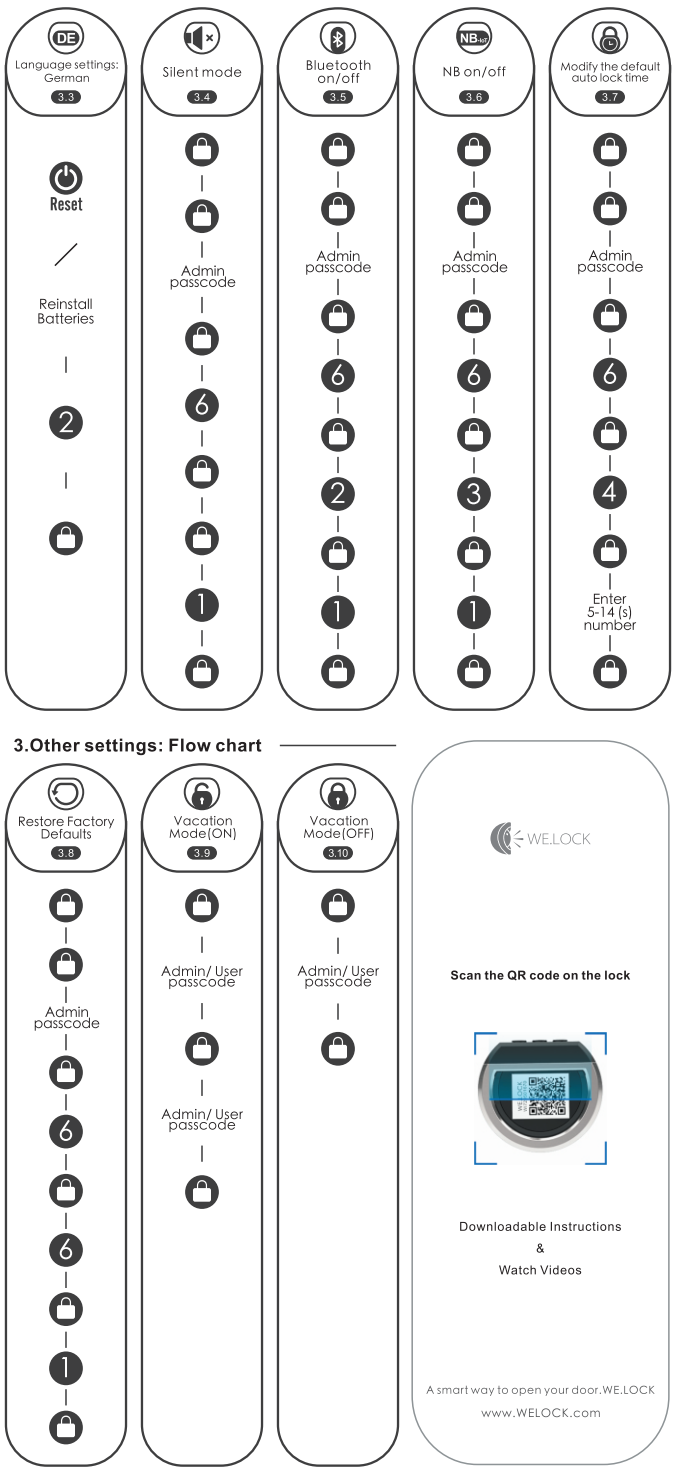

3.Other settings: Flow chart

WE.LOCK

Scan the QR code on the lock

Downloadable Instructions
&
Watch Videos

A smart way to open your door.WE.LOCK
www.WELOCK.com

Applicable size



1.Measure to confirm that the hole in the door is 2-1/8"(2.12in)



2.Measure to confirm that backset is either 2-3/8"or 2-3/4"(2.36or2.76in)



3.Measure to comfirm that the door is 1-3/8"to 2"(1.36in to 1.97in)

Low battery prompt:

After waking up, the screen displays:

After 3 "beep beep beep" beeps The screen prompts: "Battery Low".

Battery Low

Please replace the battery promptly when the above message appears.

Product Introduction









Bluetooth activation and login instructions

Scan the QR code on the lock.

Select "Android/iOS" to download.

Log in to the app

① Select your country/region

② Enter the phone number/email to get the verification code

③ Click"Send"

④ Enter the verification code after receiving the message

⑤ Click"Login"

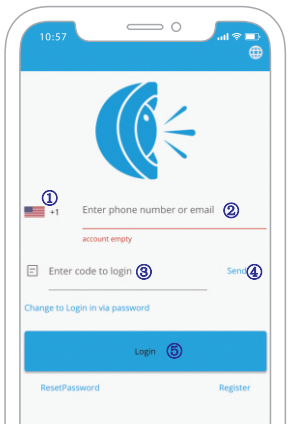

Bind the device

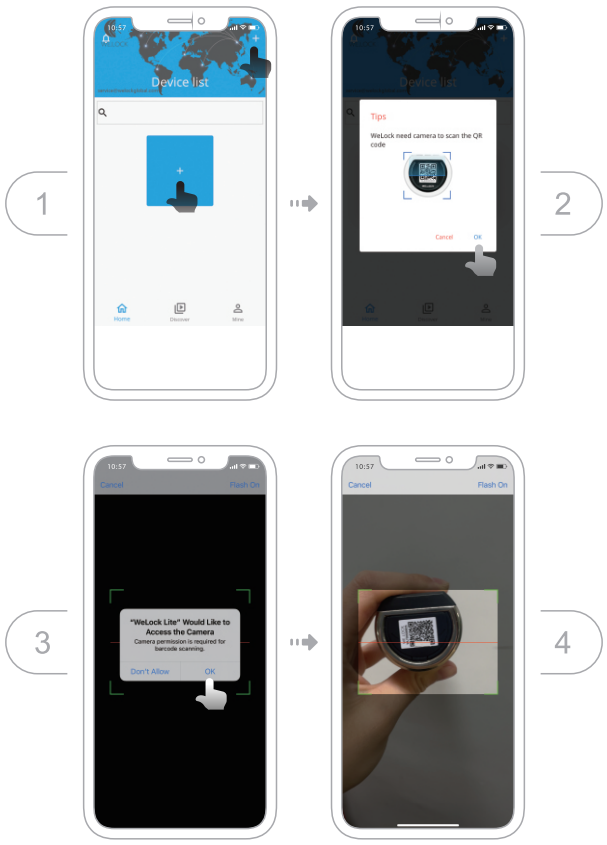

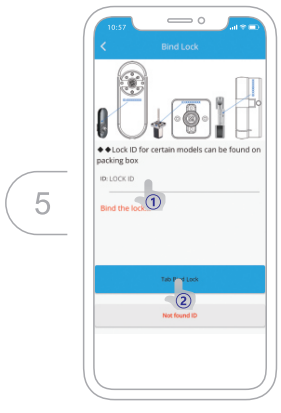

Specifications

Brand	WE.LOCK
Applicable door types	Wooden doors, Interior doors
Adjustable range	1 3/8"to 1 15/16"(35-55 mm)
Operating Temperature	-25°C–60°C
Pressing Cycle Times	100,000 Times
Material of handle	Zinc Alloy
Way to unlock	Passcode / IC card / Bluetooth
Battery Type	4*AAA Battery
Power input	4V-6V
Battery Replacement	Replaceable
Color	Silver/ Black
Battery Life	>1 year

FAQ

- **How often is the battery changed?**
  When the low battery alarm occurs, the battery needs to be replaced in time.

- **When will the low battery alarm?**
  The battery is below 20%.

- **How can enter scramble code?**
  Enter any number before and after a correct passcode, 30 digits or less.

- **How can unlock when the battery runs out?**
  Users can use a mobile power supply to power the lock via a micro USB cable,and then use our App to unlock.

- **How can contact customer service?**
  Please contact this email: Service@WelockGlobal.com