




LED Bathroom Mirror  
With Front and Backlit

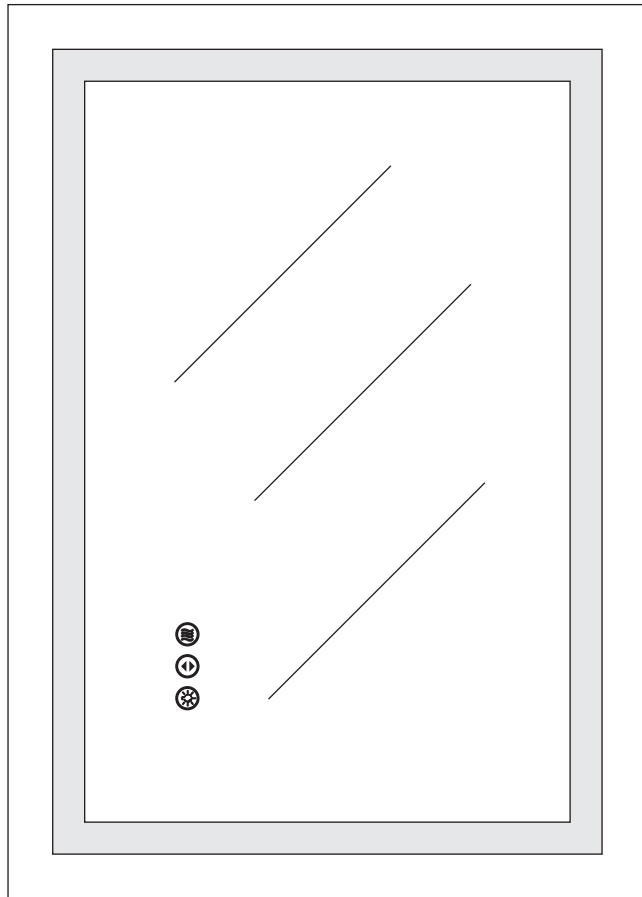

# User Manual

## Before Installation


Thank you so much for choosing Amorho mirrors, in order to facilitate the use of our products, please read this instruction carefully before you begin installation.

### Please Notice:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test the all of functions of the mirror before wall mount.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 110V. If the voltage exceeds 110V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
9. Before cleaning the mirror, make sure that the power supply is disconnected.

For any problems, please feel free to contact us:  
[support@amorhostore.com](mailto:support@amorhostore.com)

# Product Description

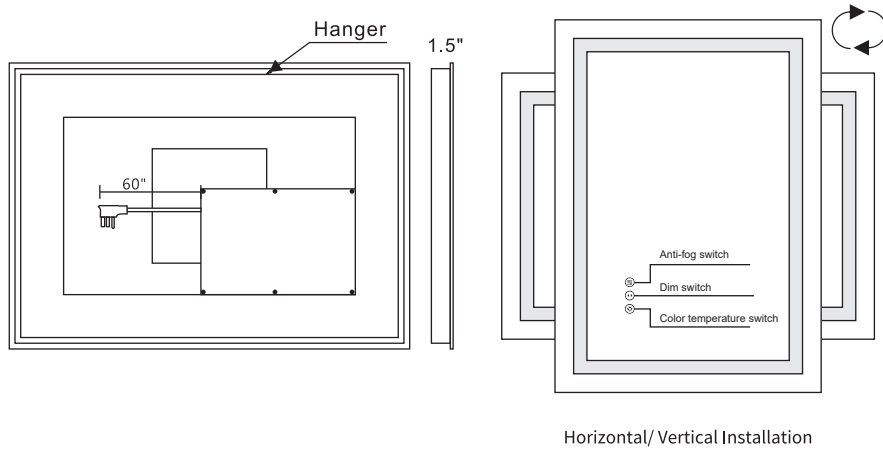

## Before installation, please check to make sure these functions work properly:



**Anti-fog switch:** After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.



**Dim switch:** The led light supports 10% to 100% brightness adjustment, just long press the button. This button has memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the buttons each time.











**Color temperature switch:** The front and back lights all have three color temperatures that can be switch(3000K/4000K/6000K), just need to short press this button. And this button has a memory function as well.






# Specifications and Parameters

Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power (W)	Input Voltage (V)	Weight (kg)
20"X 28"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	4520	90	48	110V	6.9
24"X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	5480	90	60	110V	8.8
24"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	5962	90	60	110V	9.68
24"X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	6125	90	60	110V	10.5
28"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	6251	90	60	110V	11
36"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	8144	90	75	110V	13.5
32"X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	8144	90	75	110V	13.3
32"X 48"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9074	90	100	110V	15.4
36"X 48"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9660	90	100	110V	17.2
28"X 60"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9500	90	100	110V	16.8
32"X 72"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	12210	90	150	110V	22.5
55"X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9500	90	150	110V	19
60"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	10500	90	155	110V	17.5
72"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	12000	90	150	110V	12.5
84"X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	14920	90	150	110V	28
96"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	18620	90	150	110V	32




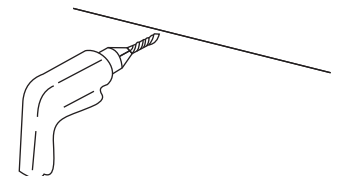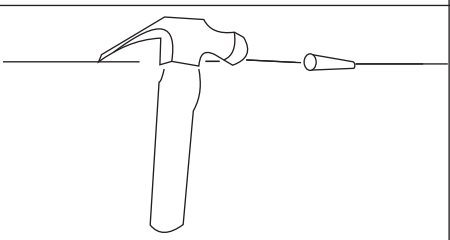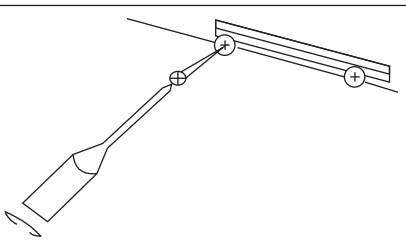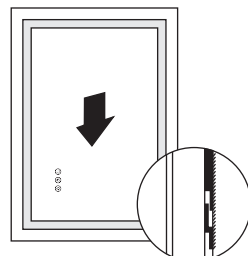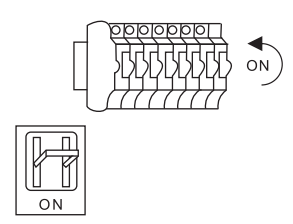



# Installation Instruction

Method 1: Plug in	Method 2: Hardwire
 <p>Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.</p>	 <p>Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).</p>
<p>Step 1</p>  <p>Draw a straight line with a ruler to keep the mirror horizontal</p>	<p>Step 2</p>  <p>Drill 2 holes or 4 holes according to screws you received.</p>
<p>Step 3</p> 	<p>Step 4</p> 
<p>Step 5</p> 	<p>Step 6</p> 


# PACKAGE CONTENTS

				
Bracket x2	Wall Anchors x4	Screws x4	Plug	LED Mirror


# YOU MAY NEED THESE TOOLS

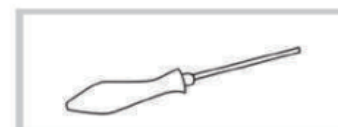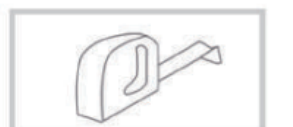			
Level	Pencil	Hammer	Safety Goggles
			
Electric Drill	Phillips Screwdriver	Tape Measure	

## SIZE 1

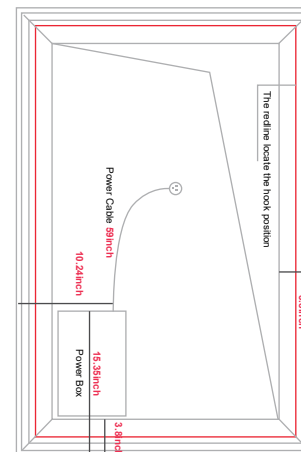

## SIZE 2

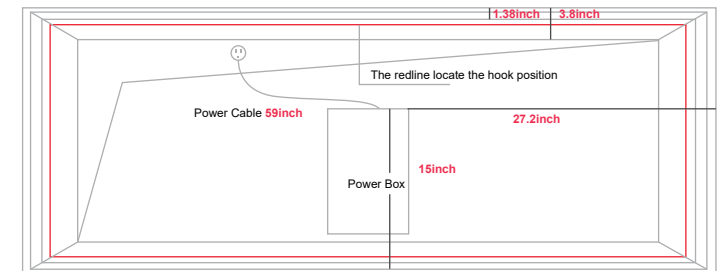

PS: The location of the button is locate the power box.

## Meaning of LED Lights

State of LED Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

## Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the cover of the power supply on the back of the mirror to test the power cables, tighten the cables if they are loose. ( Please cut off the power firstly before testing the power supply and cables)
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.

# AMORHO

Manufacturer: Zhongshan Chengjiang Glass Technology Co., Ltd.  
 Address: Jichang Village, Dongfeng Town, Zhongshan City, Guangdong Province, China  
 Contact us: yujingus@163.com

