


Baseus倍思

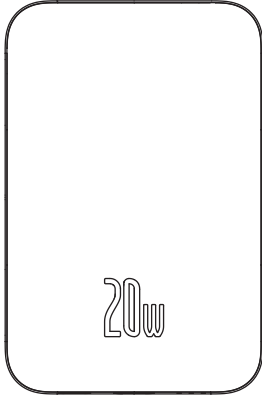

倍思 磁吸迷你无线快充移动电源10000mAh 20W

使用说明书

使用产品前请仔细阅读本产品使用说明书,并妥善保管


一、产品参数

品牌: 倍思
名称: 移动电源
型号: PPCM10
电池: 聚合物锂电池
电池能量: 10000mAh / 38.5Wh
额定容量: 5800mAh (5V=2.4A)
能量转换率: ≥75%
Type-C输入: 5V-3A; 9V-2A
Type-C输出: 5V-2.4A; 9V-2.22A; 12V-1.5A
无线充输出: 5W/7.5W/10W/15W
总输出: 5V-2.4A
产品尺寸: 104.6 X 68.9 X 20 mm
产品重量: 约208g

二、包装清单

移动电源*1 说明书*1 保修卡*1 充电线*1

三、产品框图



四、产品描述

本产品是一款能为手机、平板、电子书、游戏机等数码产品提供有线充电或无线充电的便携式充电设备。产品具有有线充电和无线充电二合一,磁吸定位,支持IP20W PD快充,Type-C双向快充,15W无线快充等特点。产品内置FOD、过充、过放、温度保护等多种安全保护电路。

五、使用环境

使用环境温度:0°C至40°C非热带地区
储存环境温度:0°C至40°C

六、图标说明

5年图标是指“环保有效使用期限”,不是产品质量保证期限。电子产品均含有铅、汞、镉等有毒有害物质,一旦超期使用,有毒有害物质可能因为发生外泄或突变,对环境造成污染,或对人体、财产造成严重损害。“环保使用期限”,意味着所有的电子产品均将被要求在此有效期限内使用,超过安全使用年限之后出现的安全风险问题,我们不再对产品负责。

七、操作说明

查看电量时:
按1次启动电源输出功能,可查看电源剩余电量,电量指示灯亮起约30秒指示后会自动熄灭;
有线充输出操作说明:

-1-

使用充电线连接本电源对应输出端口,电源将自动开启输出,个别手机因兼容性需要,需要长按并启动电源输出功能,按1次电源输出功能会持续约30秒,30秒内无外接负载,则自动关闭电源输出。

无线充输出操作说明:

产品具有自动唤醒无线充电功能,放上手机自动开启充电,个别手机因兼容性问题,需要长按并启动无线充电功能,按1次,电量指示灯亮起,此时无线充输出功能开启,可为支持无线充电的手机充电,如30秒内无线充无负载接入,产品则会自动关闭无线充电功能。

八、无线充温馨提醒说明

无线充电手机需放置在本产品无线充电区域(无线充电线圈发射区域见图示说明)进行无线充电,本无线充电距离为8mm内,如进行无线充电时距离超过8mm则无法进行无线充电,请调整手机无线充电距离在无线充电范围内。

九、安全警示说明

- 1.手机背面充电接触面不能带有金属物质,如铁片,插环,金属保护壳等。
- 2.手机进行充电时,如发现有线充电或无线充电严重的情况,很可能因为手机接收线圈与无线充线圈没有完全对准,手机保护套内部有金属异物,请尝试冷却手机,拿掉保护套再进行正确位置对齐。
- 3.请勿自行拆机,用户不正确使用或不正确放置本产品可能会导致本产品寿命减低或损坏,因此而带来的责任不属于保修责任或厂家责任。
- 4.移动电源存在转化效率,故输出功率与电池容量并不等于可充电量。
- 5.请定期为您的电源充电(建议至少每月一次),可维持其长久的使用寿命。
- 6.如因消费者违反产品说明书不恰当使用,造成的人身及财产损失将由自行承担一切后果,本公司将不承担任何法律责任。
- 7.避免使用超出本产品输出电流的电器或负载(电路会保护,无输出)。
- 8.避免强力的物理作用,包括敲击、投掷、践踏、挤压等。

十、电子信息产品有毒有害物质声明

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB	X	○	○	○	○	○
电极	○	○	○	○	○	○
电池	X	○	○	○	○	○
外壳	○	○	○	○	○	○

本表格依据SJ/T 11364的规定编制。
O:表示含有有毒有害物质在该部件所有均质材料中的含量均在GB/T 26572标准规定的限量要求以下。

X:表示含有有毒有害物质至少在该部件某一均质材料中的含量超出GB/T 26572标准规定的限量要求。
该产品符合欧盟RoHS 2.0指令 (2011/65/EU)

-2-

特此申明,深圳市尚商创科有限公司的产品型号为:PPCM10符合指令2014/30/EU和2011/65/EU的规定。欲查看符合声明的全文可在以下网站查询:www.baseus.com



此设备符合欧盟指令2012/19/EU的规定,此设备不得与普通废弃物一起处理,必须回收利用。此符号标明本产品不得作为生活垃圾处理,而必须将本产品交至相应的废品回收站,进行电子电气设备回收处理。




警告 请遵守安全环保指南及国家防火、触电、循环环保标志的要求

制造商: 深圳市倍思科技有限公司
地址: 深圳市龙岗区坂田街道岗头社区雪岗南路2008号倍思智能园B栋二楼
执行标准: GB/T 35590-2017
热线: 4000-712-711 网址: www.baseus.com
倍思设计
中国制造
图片仅供参考,请以实物为准。

PB3605Z-P0A0
1000044379

Baseus

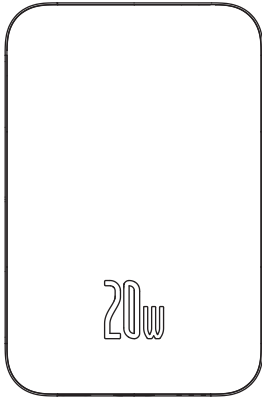

Baseus Magnetic Mini Wireless Fast Charge
Power Bank 10000mAh 20W

User Manual

Please read this user manual carefully before use and keep it properly


1. Product Parameter

Brand: Baseus
Name: Power Bank
Model No.: PPCM10
Battery: Polymer Lithium Battery
Power Capacity: 10000mAh / 38.5Wh
Rated Capacity: 5800mAh (5V=2.4A)
Energy conversion rate: ≥75%
Type-C input: 5V-3A; 9V-2A
Type-C output: 5V-2.4A; 9V-2.22A; 12V-1.5A
Wireless Output: 5W/7.5W/10W/15W
Total output: 5V-2.4A
Product size: 104.6x68.9x20 mm
Product weight: About 208g

2. Packing list

Power Bank *1 User Manual *1 Warranty card *1 Charging Cable *1

3. Product Diagram



4. Product description

This product is a portable charging device that can provide wired and wireless charging for mobile phones, tablets, e-book readers, game machines and other digital products. The product combines wired charging and wireless charging into one with the feature of magnetic suction positioning and supports IP20W PD fast charging. Type-C dual-way fast charging, 15W wireless fast charging, etc. It has built-in FOD, overcharge, over-discharge, temperature protection and other safety protection circuit, over, over discharge, temperature protection and other safety protection circuit.

5. Use environment

Working temperature: Non-tropical area, 0°C to 40°C
Storage ambient temperature: 0°C to 40°C

6. Icon description

The 5-year icon refers to the "valid environment-friendly use period", not the product quality assurance period. Electronic products contain toxic and harmful substances such as lead, mercury and cadmium. The overdue use of these products may lead to leakage or mutation of these toxic and harmful substances, cause environment pollution or serious damage to people and property. The term of "environment-friendly use period" means that all electronic products shall be used within this validity period. We are free of any responsibility against safety issues caused by using the product beyond its safe service life.

7. Operation description

For viewing battery level:
Press the button once to initiate the power output function, and check the remaining battery of the power bank, during which time the indicator will light up for about 30s and then go out.
Wired charging operation:
Connect the charging cable to the corresponding output port of the power bank, and it will start to output automatically. Due to compatibility issues, certain smart phones need to press the key to turn on the power output function. Please see the

-1-

button once to enter power-on state for 30s, during which time if there is no external load connected, the power bank will automatically turn off.
Wireless charging operation:

The product comes with an auto-awake function for wireless charging. When it detects any phone placed on, it will automatically start charging. Due to compatibility issues, certain mobile phones need to press the button to start the wireless charging. Press the button once, and the power indicator will light up. At this time, the wireless output function is turned on, which can charge the mobile phone wirelessly. If there is no wireless charging devices detected within 30 seconds, the product will automatically turn off the wireless charging function.

8. Wireless charging tips

The wireless charging mobile phone should be placed in the wireless charging area of the product (the transmitting area of the wireless charging coil is illustrated in the picture) for wireless charging. The wireless charging distance is within 8 mm. If the distance exceeds 8 mm, the wireless charging can not function. Please adjust the wireless charging distance within the wireless charging range.

9. Safety warning instructions Tips

- 9.1. The charging contact surface on the back of the mobile phone should not be covered with metal materials, such as iron shell, ring, metal protective case, etc.
- 9.2. When the mobile phone is charging, if intermittent charging or seriously heating is found, it may be that the receiving coil of the mobile phone is not completely aligned with the wireless charging coil, or there is metal foreign matter in the protective sleeve of the mobile phone. Please try to cool the mobile phone, remove the protective sleeve, and then align it in the correct position.
- 9.3. Please do not disassemble the machine by yourself! Improper use or improper placement of the product by the user may reduce the service life or damage the product. Therefore, the responsibility does not belong to the warranty responsibility or the manufacturer's responsibility. Please understand.
- 9.4. Mobile power has conversion efficiency, so the battery capacity of mobile power is not equal to the rechargeable capacity.
- 9.5. Please charge your power regularly (at least every 5 months is recommended) to maintain its long service life.
- 9.6. In case of any personal and property damage caused by consumers' improper use or warning in violation of the product instructions, the company will bear all consequences, and the company will not bear any legal liability.
- 9.7. Avoid using electrical appliances or loads that exceed the output current of the product (the circuit will be protected, no output).
- 9.8. Avoid strong physical effects, including knocking, throwing, trampling, squeezing, etc.

10. Statement on Toxic and Hazardous Substances in Electronic Information Products

This form is compiled in accordance with SJ/T 11364.
O: It indicates that the content of the toxic and harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X: The content of toxic and harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T 26572 standard.
The product complies with EU ROHS 2.0 directive (2011/65/EU)

-2-

Part Description	Toxic or hazardous substances and elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	X	○	○	○	○	○
Electrode	○	○	○	○	○	○
Battery	X	○	○	○	○	○
Casing	○	○	○	○	○	○

It is hereby declared that PPCM10, a product model of Shenzhen Times Innovation Technology Co., Ltd., complies with the provisions of Directive 2014/30/EU, 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: www.baseus.com



This equipment complies with the provisions of Directive 2012/19/EU. It is strictly forbidden to dispose of this equipment with ordinary trash; it must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.



Warning Please follow the above safety instructions otherwise it will cause fire, electric shock, damage or other damage.

Manufacturer: Shenzhen Baseus Technology Co., Ltd.
Add: 2th Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtuo Community, Bantian Street, Longgang District, Shenzhen
Executive Standard: GB/T 35590-2017
Hotline: +86-400-712-711 Website: www.baseus.com

Designed by Baseus
Made in China

PB3605Z-P0A0
1000044379