


RELAYS

External Signaling Relays

RY-AC

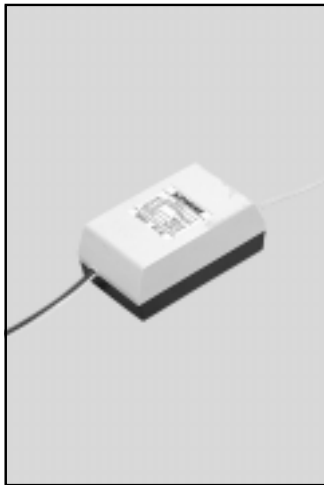


EXTERNAL SIGNALING RELAY:

- Ring a standard doorbell or activate a separate device when a call is placed from a door station
 - LEF and LEF-C Series
- In high noise areas or where a light is needed, or to activate a bell, buzzer, or light when calling between handset-type intercoms
 - TD-H Series Selective Calling and Paging system
 - IE-8 Series Selective Calling Handset system

SPECIFICATIONS:

Power Source:	Supplied by master
Relay Switching Capacity:	1A @ 24V DC or 0.3A @ 240V AC
Contact Closure:	Normally open dry contact
External Device Reqmnts:	Closed while call button is pressed
	AC or DC device not exceeding contact capacity
Dimensions (HxWxD):	4-1/16" x 2-1/4" x 1-3/8"

TAR-3

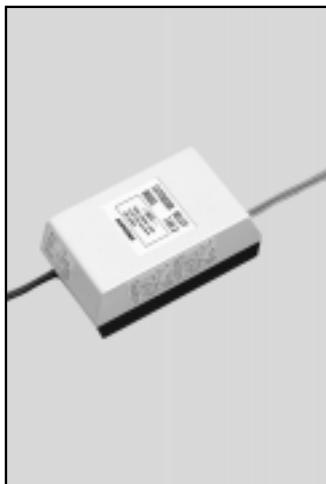

EXTERNAL SIGNALING RELAY:

- Ring a doorbell when a call is placed from a door station
 - IE-Series Handset systems
 - MY-1CD, MY-2CD and MK Video systems
 - K-Series Color Video systems
- Activate a light or a buzzer when a call is received
 - AT-406 Handset system
 - NEM Lamp Memory system
 - TB-M Internal Telephone system
 - IE-8 Selective Calling Handset system

SPECIFICATIONS:

Power Source:	6V DC, supplied by SKK-620
Relay Switching Capacity:	1A @ 24V DC or 0.3A @ 240V AC.
Contact Closure:	Normally open dry contact
External Device Reqmnts:	Closed for the duration of the chime signal
	AC or DC device not exceeding contact capacity
Dimensions (HxWxD):	4-1/16" x 2-1/4" x 1-3/8"