USAGE INSTRUCTIONS

- 1. To install battery: Unscrew tail cap. Insert positive end of the battery towards LED. Tighten the tail cap till it's completely closed.
- 2. To turn the light ON / OFF: Push the back switch to click. Once Turned on the flashlight will access the mode last used. To Turn the Light OFF, push the back button to click.
- 3. To switch light levels: Turn on light with back button. Each click of the side switch will cycle the light to the next mode.
- 4. Access the direct to strobe function: Turn light on and hold down side switch (long click, 0.3 seconds). The light will remain on strobe until you switch light levels.

LOW BATTERY INDICAYTOR

1. When the battery is close to being depleted, the Side Switch will turn "RED". At this point follow charging instructions.

CHARGING INSTRUCTIONS

- 1. Plug USB end of the charging cable into a 5V power source.
- 2. Attach MAGNETIC end of the charging cable to CHARGING PORT of flashlight. (Indicator Light will turn "BLUE")
- 3. Click the back button as if, turning the light on. (The indicator light will change from "BLUE" to "RED"), this will indicate that the flashlight is charging.

LED Type: Cree XM-L2 U3 White LED

Battery: (1) 18650 Rechargeable Li-ion.

NOT compatible with RCR123A / 16340

Size:


Length:123.75mm Bezel Diameter: 25.4mm

Body Diameter: 23mm

Weight: 65g (without battery)

ILLUMINATION FUNCTIONS

| Mode: Max Output: Runtime: | .51 lm | Low 50 lm 25 hrs | Medium 180 lm 10.5 hrs | 480 lm | Turbo 1300 lm 2.6 hrs | 1300 lm |
|----------------------------------|--------|------------------------|------------------------------|--------|-----------------------------|---------|
| Max Output: Runtime: | | | 180 lm 6.2 hrs | | | |

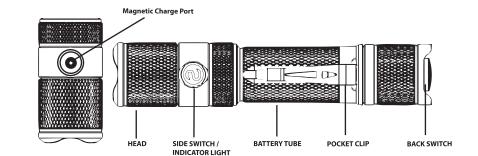





USER MANUAL

4. When charging is complete the indicator light will change from "RED" to "BLUE".

SPECIAL FEATURE

We have also programed in a special feature that will allow you to use the light while the M5 is in charge mode. This function is usefull when you would like to use the light as a nightlight while charging.

- To activate this feature, the light must be in charge mode.
- 2. You will only have access to Firefly, Low and Medium illumination functions.
- Click the side switch and the light will turn on to firefly, click again to change to low, click again to change to Medium illumination.
- 4. To Turn the light off, hold down the side switch, or detach the charging cable and re-attach.

Maintenance

Every 3 months, threads should be wiped with a clean cloth followed by a thin coating of silicon-based lubricant.

FEATURES & SPECIFICATIONS

- Powerful CREE XM-L2 U3 LED produces 1300 Lumens at the brightest setting including strobe.
- 200+ meters of throw to illuminate both long and short distances.
- Simple user interface for tactical and self-defense.

 Integrated side switch for quick access of function.
- Integrated side switch for quick access of functions.

 Unique digital circuit technology to maximize battery
- life and give consistent light output.Reverse polarity protection. Protects from improper battery installation.
- 6 different settings that include 5 levels of brightness plus a strobe. Auto memorization for all settings.
- Machined from aircraft grade aluminum. Has type III anodized finish.
- Double coated glass lens to give maximum OTF (Out The Front) brightness and beam distance.
- Tempered glass to resist breaking and scratching upon impact.
- Waterproof to IPX8 standard. Submersible up to 2 meters under water.

DISCLAIMER

- After long periods of use on the highest setting, the surface area may get hot. Please use caution when using the flashlight in a constant high brightness level. It is recommended to let the flashlight cool down to prevent any injury.
- High intensity light is harmful to human eyes. This product is not meant to be handled by children under the age of 18 without adult supervision.
- insure maximum performance and safety. Consult with the manufacturer regarding any questions or concerns.
 PowerTac's liability is voided if the light is not used in a

• Use the highest quality, protected-circuit batteries to

- proper manner or if modified.

 PowerTac reserves the right to change the design
- PowerTac reserves the right to change the design and/or specifications of all PowerTac products without prior notice.
- Please do not change batteries at dangerous locations such as gas stations. Batteries must only be changed or removed when light is off.
- Do not use or attempt to recharge a disposable CR123 battery! Do not throw the flashlight into a fire as an

explosion may occur.

THE POWERTAC NO-HASSLE LIFETIME WARRANTY

Please visit our website at powertac.com for full warranty policy.

WARRANTY DISCLAIMER

The above warranty is exclusive, and to the extent permitted by applicable laws, shall be in lieu of all other warranties, express or implied, including, without limitation, any warranty of merchantability or fitness for a particular use or purpose. PowerTac disclaims any and all liability for product malfunctions, physical injuries, or property damages that result in whole, or in part, from the criminal, negligent, or improper use of the product, or from modifications or alterations thereto. In no event shall PowerTac be liable for any incidental, special, or consequential damages relating to the purchase, use, or performance of any PowerTac product.

WARRANTY CLAIMS

Please go to www.powertac.com/warranty and follow instructions.

© 2018 POWERTAC USA, INC. ALL RIGHTS RESERVED

WWW.POWERTAC.COM