



**Revillusion®**  
36" Built-in Electric Firebox

RBF36WC  
Weathered Concrete

The Future of  
Fireplaces is Clear.™



Building on the innovative Revillusion® ThruView™ full-depth design, the new Weathered Concrete Series strikes a more contemporary chord. The poured concrete features subtle detail and a neutral palette that provides a dramatic contrast for the lifelike flames. This playful use of an industrial material is a unique way to give any space some stylish, industrial flair.



## Revillusion® 36" Built-in Electric Firebox

## RBF36WC Weathered Concrete



**Mood-maker Remote**  
Customize the light color and intensity for a fireplace that reflects your personality.



120 V | 1,500 W | 5,500 BTU  
208 V | 1,975 W | 6,745 BTU  
240 V | 2,575 W | 8,794 BTU

### Features

- Revillusion® Flame Technology**  
Flames are larger, brighter and more random, appearing from within the logs.
- Mirage™ Flame Panel**  
Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections.
- ThruView™ Full-depth Design**  
See clear through the flames to the back of the firebox for a more authentic experience.
- Mood Lighting**  
Customize the firebox glow with a choice of warm hues, plus midnight mode.
- Color Enhancement**  
Adjust the flame base color to red or blue.
- Realslogs® Plus**  
A full grate of life-size hardwood-cast logs, tiered for greater depth.
- Full Surround Firebox**  
More authentic day or night; 270-degree surround with natural soot markings.
- Brightness and Flicker**  
Adjust light level to suit the room and choose flicker effect for enhanced firelight.
- Ambient Light Sensor**  
Automatically adjusts firebox light to suit the room day to night.
- Quick and Easy Installation**  
Simply frame, wire and finish – no venting, gas lines or safety screens.
- Primary Heat**  
Option to use 240 volt supply for up to 8,800 BTU - use as part of primary heating plan; heater also operates without flame and can be deactivated.
- All-season Flames**  
Enjoy the unique charm of a fireplace 365 days a year using the flames without the heat.
- Direct-wire**  
Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available).
- Low Carbon Footprint**  
The most sustainable fireplace option; no emissions and 100% efficient.

Model #	Description	Lbs / Kg	UPC	Wty¹	Carton Dimensions (WxHxD)		Cube	
					Inches	cm	ft³	m³
RBF36WC	36" Built-in Electric Firebox - Weathered concrete interior	74.7 / 34.0	781052 129856	2 yrs.	41-1/4 x 15-1/4 x 31-7/8	104.6 x 38.7 x 81.0	11.6	0.3
RBF36	36" Built-in Electric Firebox - Herringbone brick interior	74.9 / 34.0	781052 104723	2 yrs.	41-1/4 x 15-1/4 x 31-7/8	104.6 x 38.7 x 81.0	11.6	0.3
RBFL42BR	Birch Log Set	15 / 6.8	781052 129993	2 yr.	29-7/8 x 17-1/2 x 15	75.9 x 44.1 x 38.1	4.52	0.13
RBFL42FC	Fresh Cut Log Set	15 / 6.8	781052 129986	2 yr.	29-7/8 x 17-1/2 x 15	75.9 x 44.1 x 38.1	4.52	0.13
RBFLPLUG	Plug Kit	0.6 / 0.3	781052 107656	1 yr.	7 x 3 x 4	17.8 x 7.6 x 10.2	0.05	0.00
RBFLGLASS36	Single Glass Pane	25.1 / 11.4	781052 108011	1 yr.	42-1/8 x 29-1/4 x 4-1/4	106.8 x 74.2 x 10.6	3.0	0.08
RBFDOR36	36" Glass Door	32.7 / 14.7	781052 108059	1 yr.	41-7/8 x 30-1/8 x 4-5/8	106.3 x 76.4 x 11.6	3.3	0.09

Specifications, finishes and dimensions are subject to change. ¹Limited warranty. ©2019 Glen Dimplex Americas.

SE-455-R00-022420

## Revillusion® 36" Built-in Electric Firebox

## RBF36WC Weathered Concrete

### Accessories



**RBFGLOSS36** - 36" Tempered Front Glass  
Dimensions:  
35-1/8" W x 22-1/8" H x 3/8" D  
(89.1 cm x 56.1 cm x 1.1 cm)



**RBFDOR36** - 36" Functional Doors  
with Tempered Glass  
Dimensions:  
39-3/4" W x 27-1/4" H x 1-1/4" D  
(101.1 cm x 69.4 cm x 3.7 cm)



**RBFPLUG**





**RBFL42BR** - Birch Log Set  
Dimensions:  
26-1/2" W x 11-1/8" H x 11" D  
(67.2 cm x 28.1 cm x 27.9 cm)



**RBFL42FC** - Fresh Cut Log Set  
Dimensions:  
26-1/2" W x 11-1/8" H x 11" D  
(67.2 cm x 28.1 cm x 27.9 cm)

### Framing Dimensions:

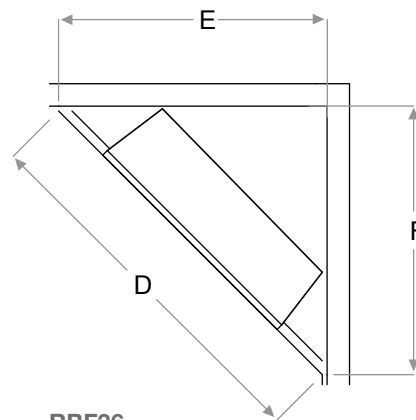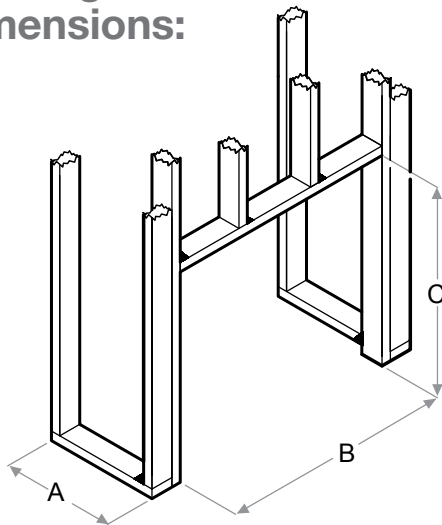

**NOTE:** The materials used for the finished surround must be cut to precise dimensions as the 1/2" (1.3 cm) self trimming flange is only to create a finished appearance.

RBF36					
A	B	C	D	E	F
12-1/2" (31.8 cm)	36-5/8" (93.0 cm)	26-1/4" (66.5 cm)	60" (152.4 cm)	42-1/2" (108.0 cm)	42-1/2" (108.0 cm)