



Smart Zigbee Wall Switch

DS-3305

The **DS-3305 Prolink Smart Zigbee Wall Switch** elevates your home to the next level by turning it into a smart home. Simply turn on and off your lights, fans remotely with the convenience of voice control or a preset time schedule. Not much effort is required with the easy installation of the Prolink Smart Wall Switch onto the walls of your home.



Zigbee 3.0



**Neutral Line
(Optional)**



Voice Control



**Support up to
10A Current**

*Note: This product requires DS-3306 Prolink Smart Zigbee Hub to function.

Key Features



Anti Light Flickering

Uses relay switch to avoid fluorescent light from flickering when turning on other wall switches.




Soft Click Switch

Significantly reduces the clicking sounds while keeping tactile feedback.



No Capacitor Required

Zigbee Smart Wall Switch requires very little power, there is no need for complex installation by adding external capacitor at the lighting socket connector.



Optional Neutral Line

Enjoy the convenience of smart lights, without spending a fortune to rewire the electrical neutral wires inside walls and ceilings. Alternatively, wire the neutral wire on the switch when available.



Relay Solution

Undertake larger loads of up to 10A / 2000W with relay switch solution.



Time Schedule

Set schedules for your Smart Wall Switch to automatically turn on and off while you're home or away.



Voice Control

Use voice control to seamlessly turn on or off your home appliances (i.e., lights, fan and etc). The Smart Wall Switch is compatible with various voice assistants such as Amazon Alexa, Siri Shortcuts, SmartThings or Google Assistant.



Remote Control

Control Anywhere, Anytime.
(Hub required)





Family Sharing

Allow multiple family members to control the wall switch.



Specifications

Communication	Zigbee 3.0
Zigbee	Frequency (GHz): 2.405~2.480
	Transmit Power (dBm): 5.31
Max Current	10A
Working Voltage	AC100V~240V
Working Temperature	-10 to 65°C
Rated Power (Resistive Load)	With Neutral Line installed - min 3W ~ upto 2000W Without Neutral Line installed - min 5W ~ upto 2000W
Supported App	mEzee, Smart Life (Android/ iOS)
Working Power Consumption	<0.6W
Standby Power Consumption	<0.1W
Gang Type	1/ 2/ 3 Gang
Colour	White/Charcoal
Hub Required	Yes, Compatible with Prolink DS-3306 Smart Zigbee Hub
Product Dimension (L x W x H)	86 x 86 x 38.5mm
Casing Dimension (L x W x H)	86 x 86 x 8mm
Weight	125g
Material	PC and Iron

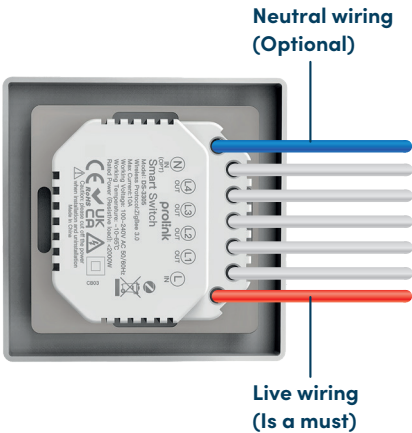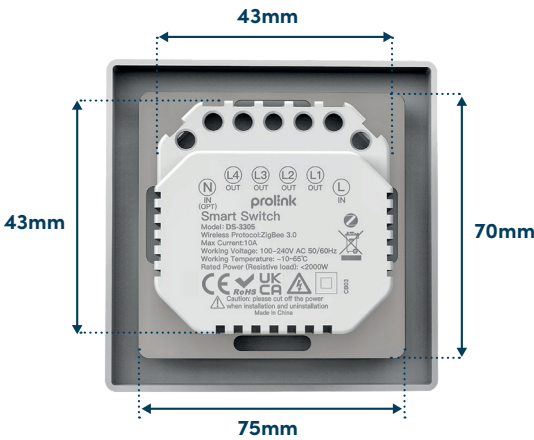

Important Safety Information: Electricity can cause personal injury and property damage when handled inappropriately. Please switch off electricity during installation and consult a licensed electrician when in doubt.

Ver1.0_31.7.2025

Authorised Distributor/ Reseller:

Compatible with:

