



User's Manual

Fervor Basic Super-Slim Bluetooth Stereo Headset

Version 1.00

(English / Indonesian)

BEFORE GETTING STARTED

This User's Manual is designed to aid you to get started with the device. If you experience problems following these guides or need further information pertaining to the device, please visit our website at www.prolink2u.com. All specifications are subject to the manufacturer's configuration at the time of shipping and may change without prior notice, written or otherwise.


1. Package Contents

- 1 x Bluetooth Headset
- 1 x USB to Micro USB Charging Cable
- 1 x Pouch
- 1 x User Manual

Note:

- The illustrations in this document may appear different from your model.
- If any of above item is not packed in your package when open, please consult your reseller immediately.

2. Overview of the Device

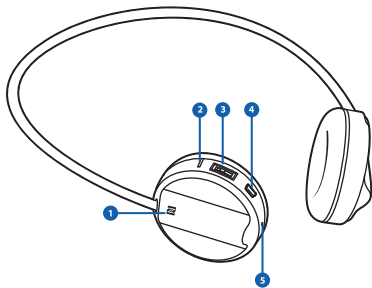

- | | |
|--|---------------------------|
| 1 NFC Detection Area | 4 Micro USB Charging Port |
| 2 LED Indicator | 5 Microphone |
| 3 Multifunction Button (MFB) | |
| • Power On/Off: Press and Hold for 3 seconds | |
| • Previous/Next Track: Slide up/down | |
| • Volume Up/Down: Slide and Hold to desired volume | |

3. Features

- NFC instant connection
- Bluetooth connection
- Multi-device pairing - connect up to two Bluetooth enabled devices simultaneously
- Automatically switch between calls and music
- Reconnect to the last paired device when powering on the headset
- Built-in microphone
- Built-in rechargeable Lithium-ion battery
- USB 2.0 charging cable included
- Battery indicator (only on iPhones/iPad with iOS5 and above) without installing App
- Voice prompt - Power on, Power off, Pairing, Pairing Completed and Incoming call/Ringing*

Requirement:

- Any audio or mobile device with Bluetooth

* Device dependent

4. Specifications

Driver Size: 40mm

Audio:

- Output Channel: Stereo
- Output Power: 17mW
- Frequency Response: 20Hz ~ 20KHz
- Microphone Sensitivity: -42dB

Bluetooth:

- Profile: HSP, HFP, A2DP, AVRCP
- Frequency: 2.4GHz
- Working distance: up to 10M (line of sight)

Connectivity:

- Bluetooth 3.0 + EDR
- NFC (create password-free Bluetooth connection instantly)

Playback Time: up to 12hrs**

Talk Time: up to 13hrs**

Standby Time: up to 360hrs

Battery Capacity: 320mAh

Charging Time: Approx. 3hrs

Dimension (WxHxD): 156 x 163 x 55mm

Weight: 70g

** Operating time varies depending on volume level

5. Using the Device

5.1 Charging the Headset

1. Please charge the battery fully before first use.
2. Insert USB charging cable into USB port which supports 5V power (e.g. Power Adapter, Power Bank or PC/Laptop USB port).
3. Connect charging cable to the Micro USB port of headset.
4. The headset LED lights in Red while charging and turns to Blue when charging completed.
5. It takes about 3 hours time to charge the headset.
6. Recharge the headset battery when you hear the warning tones of "DU DU DU", the LED blinks two times in Red.

Note:

- Recommend to power off the headset when charging.
- The lifetime of the battery will be significantly reduced if your device is left uncharged for a long period. It is recommended to recharge your headset at least once a month.

5.2 Bluetooth Connection

1. Press and hold the MFB button until you hear "Pairing" or the LED blinks in Red and Blue to enter into pairing mode.
2. Enable the Bluetooth function of your device and search for PROLiNK PHB6001E.
3. Select PROLiNK PHB6001E in the Bluetooth device list (press "Connect" if prompted).
4. If prompted for a PIN code, please enter 0000 and confirm.
5. The headset LED blinks in Blue and you will hear "Pairing Completed" when it is successfully connected to a Bluetooth device.

5. Using the Device

5.3 NFC Instant Pairing

1. Enable NFC function of your device and simply tap to the assigned NFC detection area of the headset.
2. Press “Yes” to continue the instant connection when you see the pairing message appears on your device screen.
3. Bluetooth of your device will be enabled automatically to complete the pairing process.

Note:

- The location of the NFC detection area in a device can vary depending on the device. For more information, refer to the User guide of your device.
- The NFC Instant connection requires close proximity of the two devices.

5.4 Re-connecting to a Bluetooth device

- The headset connects to last connected device automatically when power on (the Bluetooth of your device must be enabled first).
- When the headset is in standby mode and is not connected to any HFP (hands-free devices), short press the MFB button once, it will connect to last connected source device automatically.
- Simply tap on the NFC detecting area (the NFC of your device must be enabled first).

5. Using the Device

5.5 How-to Guide

Function	Status of Headset	Instructions
Voice Dial (Siri will be launched for Apple and S Voice for Samsung devices)	Standby Mode	Press and hold MFB button for 2 seconds, release it till you hear the indication sound
Redial Last Number	Standby Mode	Short press MFB twice quickly
Answer Call	Ringing	Short press MFB button
Reject Call	Ringing	Press and hold MFB button for 2 seconds, release it till you hear the indication sound
Play	Standby Mode/ Pausing	Short press MFB button
Pause	Playing Music	Short press MFB button
Next Song	Playing Music	Slide down MFB key
Previous Song	Playing Music	Slide up MFB key
Volume Up	In-call/ Playing Music	Slide up and hold MFB key
Volume Down	In-call/ Playing Music	Slide down and hold MFB key

Note:

- Device dependent to enable **all** the functions listed above.
- Some functions and indication tones may vary with different mobile phones.
- It is strongly recommended to try the duration needed to hold the MFB button for enabling respective function(s).
- When the volume of headset is adjusted to maximum or minimum, you **will** hear indication tone of "Du".

5. Using the Device

5.6 LED Indications

LED Behaviour	Status of Headset
Red LED	Charging
Blue LED	Charging completed
Blue and Red LED blinks alternately	Pairing Mode
Blue LED blinks quickly twice every 1 second	Not connected to a device
Blue and Red LED blinks quickly three times every 2 seconds	Setting up HFP and A2DP connection
Red LED blinks twice every 20 seconds	Low Power


1. Isi Kemasan

- 1 x Headset Bluetooth
- 1 x Kabel USB ke Micro USB
- 1 x Kantong
- 1 x Buku Panduan

Catatan:

- Ilustrasi dalam dokumen ini mungkin terlihat berbeda dari model Anda.
- Jika ada item di atas tidak dikemas dalam paket Anda ketika terbuka, silakan berkonsultasi reseller Anda segera.

2. Penjelasan Perangkat

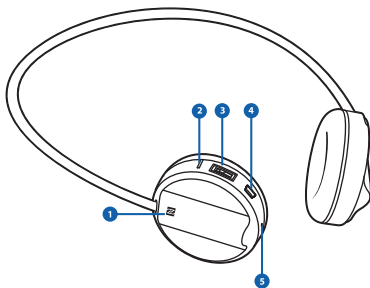

- | | |
|--|--|
| 1 Area Deteksi NFC | 4 Micro USB Port untuk pengisian Baterai |
| 2 Indikator LED | 5 Microphone |
| 3 Tombol Multifungsi (MFB) | |
| • Power On/Off: Tekan dan Tahan selama 3 detik | |
| • Track Sebelumnya/Berikutnya: Geser Atas/bawah | |
| • Volume Naik/Tutun: Geser dan Tahan untuk Volume yang di inginkan | |

3. Fitur

- Hubungan instan NFC
- Koneksi Bluetooth
- Multi-Perangkat Pairing - menghubungkan hingga dua perangkat Bluetooth diaktifkan secara bersamaan
- Secara otomatis beralih antara panggilan dan musik
- Hubungkan kembali ke perangkat yang terakhir dipasangkan pada headset
- Built-in microphone
- Built-in baterai isi ulang Lithium-ion
- USB 2.0 kabel disertakan
- Indikator baterai (hanya pada iPhone / iPad dengan iOS5 atau lebih tinggi) tanpa menginstal App
- Voice prompt – Menghidupkan, Mematikan, Menghubungkan, Hubungan selesai dan panggilan masuk/dering*

Persyaratan:

- Setiap audio atau perangkat mobile dengan Bluetooth

* Tergantung Perangkat

4. Spesifikasi

Ukuran Driver: 40mm

Audio:

- Keluaran Channel: Stereo
- Output Power: 17mW
- Frekuensi Response: 20Hz ~ 20KHz
- Microphone Sensitivitas: -42dB

Bluetooth:

- Profile: HSP, HFP, A2DP, AVRCP
- Frekuensi: 2.4GHz
- Jarak Jangkauan: Hingga 10M (Tanpa halangan)

Connectivitas:

- Bluetooth 3.0 + EDR
- NFC (Buat password- Bluetooth secara bebas terhubung langsung)

Waktu putar: Hingga 12Jam**

Waktu Bicara: Hingga 13Jam**

Waktu Siaga: Hingga 360Jam

Kapasitas Baterai: 320mAh

Waktu Pengisian: 3Jam

Dimension (WxHxD): 156 x 163 x 55mm

Berat: 70g

** Waktu operasi bervariasi tergantung pada tingkat volume

5. Menggunakan Perangkat

5.1 Pengisian Headset

1. Sebelum penggunaan pertama kali Silahkan mengisi baterai sampai penuh.
2. Masukkan kabel USB ke port USB yang mendukung tegangan 5V (misalnya Power Adaptor, Power Bank atau PC / port USB Laptop)
3. Hubungkan Micro USB kabel ke port Micro USB headset.
4. Lampu LED menyala Merah saat pengisian dan berubah menjadi biru saat pengisian selesai.
5. Dibutuhkan sekitar 3 jam waktu untuk mengisi headset.
6. Isi ulang baterai headset ketika Anda mendengar nada peringatan "DU DU DU", LED berkedip dua kali dengan warna Merah.

Catatan:

- Disarankan mematikan headset saat pengisian.
- Masa pakai baterai akan berkurang secara signifikan jika perangkat Anda dibiarkan untuk jangka waktu yang lama. Disarankan untuk mengisi ulang headset Anda setidaknya sebulan sekali.

5.2 Koneksi Bluetooth

1. Masukkan ke dalam modus pairing dengan menekan dan menahan tombol MFB sampai Anda mendengar "Pairing" atau berkedip LED Merah and Biru.
2. Aktifkan fungsi Bluetooth perangkat Anda dan mencari PROLiNK PHB6001E.
3. Pilih PROLiNK PHB6001E dalam daftar perangkat Bluetooth (tekan "Connect" jika diminta).
4. Jika diminta untuk kode PIN, masukkan 0000 dan konfirmasi.
5. Headset LED berkedip warna Blue dan Anda akan mendengar "Pairing Selesai" bila berhasil terhubung ke perangkat Bluetooth.

5. Menggunakan Perangkat

5.3 NFC Instant Pairing

1. Aktifkan fungsi NFC perangkat Anda dan cukup tekan assigned NFC agar mendeteksi area sekitar headset.
2. Tekan "Yes" untuk melanjutkan penghubungan secara instan ketika Anda melihat pesan pemasangan muncul di layar perangkat Anda.
3. Bluetooth perangkat Anda akan diaktifkan secara otomatis untuk menyelesaikan proses pairing.

Catatan:

- Lokasi area deteksi NFC di perangkat dapat bervariasi tergantung pada perangkat. Untuk informasi lebih lanjut, lihat panduan pengguna perangkat Anda.
- Koneksi NFC Instan memerlukan kedekatan dari dua perangkat.

5.4 Menghubungkan kembali ke perangkat Bluetooth

- Headset tersambung pada perangkat yang terakhir terhubung secara otomatis saat dihidupkan (Bluetooth pada perangkat Anda harus diaktifkan terlebih dahulu).
- Bila headset berada dalam modus siaga dan tidak terhubung ke setiap HFP (hands-free perangkat), tekan singkat tombol MFB sekali, itu akan terhubung ke perangkat yang terakhir terhubung secara otomatis.
- Cukup tekan pada daerah mendeteksi NFC (NFC perangkat Anda harus diaktifkan terlebih dahulu).

5. Menggunakan Perangkat

5.5 Panduan

Fungsi	Status dari Headset	Instruksi
Voice Dial (Siri akan diluncurkan untuk Apple dan S Voice untuk perangkat Samsung)	Modus Siaga	Tekan dan tahan tombol MFB selama 2 detik dan lepaskan setelah Anda mendengar suara indikasi
Redial Nomor Terakhir	Modus Siaga	Tekan sebentar MFB dua kali dengan cepat
Menjawab panggilan	Ringing	Tekan sebentar tombol MFB
Tolak panggilan	Ringing	Tekan dan tahan tombol MFB Selama 2 detik, dan lepaskan setelah Anda mendengar suara indikasi
Play	Modus Siaga / Pausing	Tekan sebentar tombol MFB
Pause	Memainkan Music	Tekan sebentar tombol MFB
Lagu berikutnya	Memainkan Music	Geser Kebawah MFB
Lagu sebelumnya	Memainkan Music	Geser Keatas MFB
Volume Naik	Dalam Panggilan / Memainkan Music	Geser Keatas dan Tahan MFB
Volume Turun	Dalam Panggilan / Memainkan Music	Music Geser Kebawah dan Tahan MFB

Catatan:

- Perangkat tergantung pada pengaktifkan semua fungsi yang tercantum di atas.
- Beberapa fungsi dan nada indikasi mungkin berbeda dengan ponsel yang berbeda.
- Sangat disarankan untuk mencoba durasi yang dibutuhkan untuk menahan tombol MFB untuk memungkinkan fungsi masing-masing (s).
- Ketika volume headset disesuaikan dengan maksimum atau minimum, Anda akan mendengar nada indikasi "Du".

5. Menggunakan Perangkat

5.6 Indikator LED

Perilaku LED	Status dari Headset
LED Merah	Pengisian Baterai
LED Biru	Pengisian Baterai selesai
LED Biru dan Merah berkedip secara bergantian	Modus Pairing
LED Biru berkedip cepat 2 kali setiap detik	Tidak terhubung ke perangkat
LED Biru dan Merah berkedip cepat 3 kali setiap 2 detik	Setting koneksi HFP & A2DP connection
LED Merah berkedip 2 kali setiap 20 detik	Baterai Power lemah

KETENTUAN GARANSI (for Indonesia region only)

Kami mengucapkan terima kasih atas kepercayaan Anda memilih produk kami dan selaku distributor di Indonesia, kami memberikan garansi produk selama 1 (satu) tahun.

1. Garansi Hanya Berlaku Jika :
 - a. Dijisi dengan jelas, lengkap dan benar.
 - b. Jika telah dikirimkan dan diterima oleh PT. Prolink Intidata Nusantara.
 - c. Memperlihatkan kartu garansi asli dan nota pembelian pada saat klaim service.
2. Garansi Tidak Berlaku Apabila :
 - a. Kerusakan yang disebabkan oleh, kelalaian pemakai, bencana alam, kebakaran, tegangan listrik yang terlalu tinggi / rendah, terkena cairan.
 - b. Kerusakan yang diakibatkan karena transportasi / pengiriman, pemasangan / pengoperasian yang tidak sesuai dengan buku petunjuk, penyambungan dengan alat lain.
 - c. Barang yang diservice tidak sesuai dengan kartu garansi.
 - d. Serial number rusak / robek / tidak ada.

3. Ruang Lingkup Garansi :

- a. Garansi hanya mencakup bagian-bagian / komponen perangkat keras dari konfigurasi standar yang terdapat pada spesifikasi produk sesuai dengan faktur.
- b. Khusus netbook garansi baterai hanya berlaku selama 6 bulan sejak tgl. pembelian.

* Biaya pengiriman ditanggung pembeli


PROLINK[®]

Your Reliable IT Products

Tempelkan perangkat
disini.
Hanya untuk pengeposan
di Indonesia

Kepada Yth.
Customer Service

PT. PROLINK INTIDATA NUSANTARA
Jl. Cideng Barat No.79
Jakarta Pusat 10150 - Indonesia

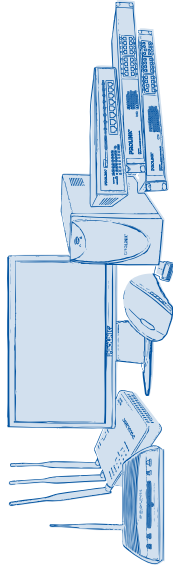

KARTU GARANSI

(for Indonesia region only)

No :**KARTU GARANSI / WARRANTY CARD***(for Indonesia region only)*

Barang Data Comm Networking Netbook
Produk UPS Display* Accessories

S/N :

Nama _____
Name _____

Model :

Alamat _____
Address _____

Tgl. Pembelian _____
Purchase Date _____

Kota :**Kode Pos :**

Dealer : _____
Toko : _____

Kota : _____
City : _____

Tel / Fax :**Email :****Pelanggan****PT. Prolink Intidata Nusantara****Cap Toko**

Kartu Garansi harus diisi lengkap, kirimkan paling lambat 14 Hari setelah Tgl. Pembelian / Please Fill - in Your Warranty Card Completely and Send max. 14 day after Purchase
** Terdaftar No.2134/1.824.124*

Alamat Pengiriman : _____
Address : _____

PT. PROLINK INTIDATA NUSANTARA
Jl. Cideng Barat No.79 Jakarta Pusat 10150 - Indonesia

Telp. : (02-21) 34831777
Fax : (02-21) 34830788
Email: service@prolink.co.id



No :**KARTU GARANSI / WARRANTY CARD***(for Indonesia region only)*

Barang Data Comm Networking Netbook
Produk UPS Display* Accessories

S/N :

Nama _____
Name _____

Model :

Alamat _____
Address _____

Tgl. Pembelian _____
Purchase Date _____

Dealer : _____
Toko : _____

Kota : _____
City : _____

Kode Pos :**Tel / Fax :****Email :****Pelanggan****PT. Prolink Intidata Nusantara****Cap Toko**

*Kartu Garansi harus diisi lengkap, kirimkan paling lambat 14 Hari setelah Tgl. Pembelian / Please Fill - in Your Warranty Card Completely and Send max. 14 day after Purchase
* Terdaftar No.2134/1.824.124*

Alamat Pengiriman : **PT. PROLINK INTIDATA NUSANTARA**
Address : **Jl. Cideng Barat No.79 Jakarta Pusat 10150 - Indonesia**

Telp. : (02-21) 34831777
Fax : (02-21) 34830788
Email : service@prolink.co.id

Worldwide Customer Care Centers

INDONESIA Office

PT PROLiNK INTIDATA NUSANTARA

Walk-In : Jl. Cideng Barat No. 79, Jakarta Pusat 10150, Indonesia.

Telephone : +62 21 3483 1777

Email Support : support@prolink.co.id

MALAYSIA Office

FIDA SYSTEMS (M) SDN BHD

Walk-In : 29 Jalan USJ 1/31, 47600 Subang Jaya, Selangor Darul Ehsan, Malaysia.

Telephone : +60 3 8024 9151

Email Support : support_my@fida.com

SINGAPORE Office

FIDA INTERNATIONAL (S) PTE LTD

Walk-In : Block 16 Kallang Place #06-02, Kallang Basin Industrial Estate, Singapore 339156.

Telephone : +65 6357 0668

Email Support : support@fida.com

Technical Support Hotline

INDONESIA : +62 21 3483 1717

MALAYSIA : +60 3 8023 9151

SINGAPORE : +65 6357 0666

Note: Closed on Saturdays, Sundays and local/regional Public Holidays.

Register Online For Your Product Warranty @ www.prolink2u.com/register

PROLiNK® is a trademark of FIDA INTERNATIONAL (S) PTE LTD and is manufactured under its authority. All other brands, products, services, logos and company names mentioned herein are trademarks of their respective owners. All specifications, designs and contents are subject to changes without prior notice. © Copyright 2015. PROLiNK® all rights reserved.