



BABY CHANGERS MADE BY BABY EXPERTS.™

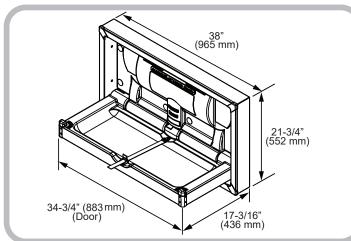

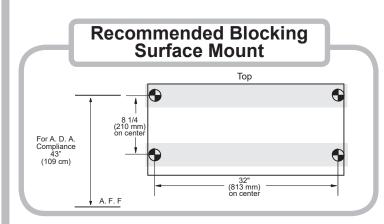

Installation Information

- Closed unit projects from wall 4" (100 mm).
- Open unit projects from wall 17-3/16" (436 mm).

Submittal Sheet

Model 100SSC-SM Surface-Mounted Stainless Steel Clad Diaper Changing Station

- Polyethylene body with stainless steel exterior
- Easy to clean, high density polyethylene which is naturally bacteria resistant, beneath 304 brushed stainless steel encasement.
- Standard with molded-in dual liner dispensers.
- Each liner dispenser holds approximately 50 pre-folded sanitary liners.
- Smooth nylon belt with Thermoplastic Polyurethane coating. Easy to sanitize and adjustable with one hand.
- Convenient bag hooks clearly labeled on both sides
- Easy to read ANSI compliant labels (ANSI Z535.3 and ANSI Z535.4), utilizing universal safety symbols
- Compact, slim profile meets A.D.A. when properly installed. Only protrudes 4 inches or 102 mm from wall.
- Includes universal changing station door sign
- Pneumatic gas shock mechanism to ensure smooth, safe open and close motions.
- Includes easy to install, step-by-step instructions plus all mounting hardware
- ASTM G21 Anti-Fungal: No measurable fungal growth
- Meets or exceeds ASTM F2285 Safety Specifications for Commercial Changing Stations.
- Standard pack: 1 unit
- Limited Warranty: This product is warrantied against manufacturing defects for a period of 5 years.

Short Specifications

Polyethylene Diaper Changing Stations with Stainless Steel Exterior:

- 1. Acceptable Products: Foundations Worldwide, Inc. Model 100SSC-SM (SS Clad Horizontal Surface Mount).
- 2. Characteristics:
 - a. Entire body 16 gauge, 304 brushed stainless steel, seamless welds.
 - b. Provide Foundations Worldwide Inc. SS flange in order to surface mount unit.
- 3. Equipped with a pneumatic cylinder
- 4. Smooth nylon belt with Thermoplastic Polyurethane coating. Easy to sanitize and adjustable with one hand.
- 5. Meets ASTM F2285 requirements for weight bearing changing stations

6. A.D.A. Compliance: 306.3



306.3Knee Clearance307.2Maximum Protruding Objects308.2Forward Reach308.3Side Reach309.4Operation902.3Work SurfaceCompliant when properly installed.ant safety labels

- 7. ANSI compliant safety labels
- 8. CPSIA compliant to applicable sections

SB20005A