


## LED ARCHITECTURAL LINKABLE LINEAR - 4" CONNECTOR LR42617, LR42618

### IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.
8. Do not touch the fixture if trial operation in case of danger.
9. DO NOT use outdoors.


### BOX CONTENTS



4" JOINER




SCREWS




SPlicing BRACKET B

### WIRING

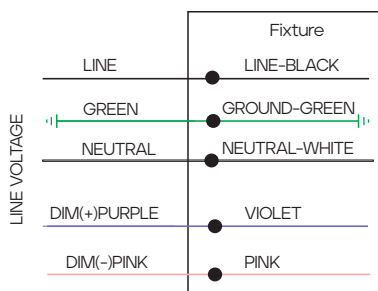

1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

### CAUTION BEFORE INSTALLATION

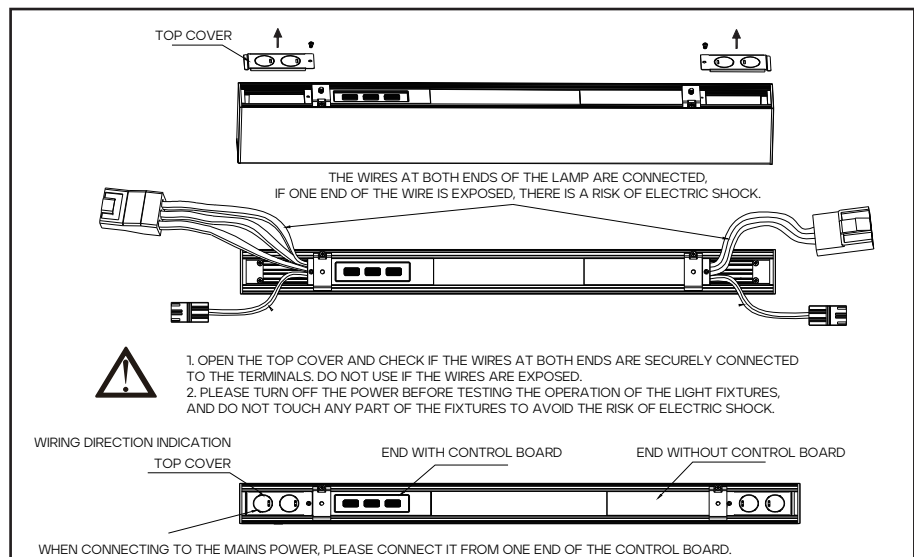


### WARNING


1. IF ANY OTHER SHAPE IS NEEDED, PLEASE CONTACT THE MANUFACTURER TO CHECK.
2. DO NOT INSTALL ACCORDING TO YOUR NEEDS WITHOUT AUTHORIZATION TO AVOID THE RISK OF ELECTRIC SHOCK.
3. WHEN SPliced FIXTURES ARE CONNECTED AS A WHOLE, THE NUMBER OF FIXTURES CONNECTED TO THE MAINS POWER IN A SINGLE CONNECTION CANNOT EXCEED THE NUMBER OF LAMPS LISTED IN THE TABLE BELOW:

Size	Wattage	110V	277V	347V
2'FT	≤ 25W	16 PCS	40 PCS	50 PCS
4'FT	≤ 50W	8 PCS	20 PCS	25 PCS
8'FT	≤ 80W	6 PCS	10 PCS	12 PCS
8'FT	≤ 100W	4 PCS	8 PCS	10 PCS


1. Remove the cover from the 6" joiner.

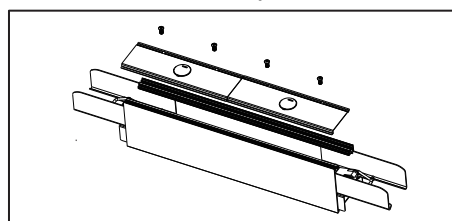


2. Remove the end cap and upper cover from fixture.

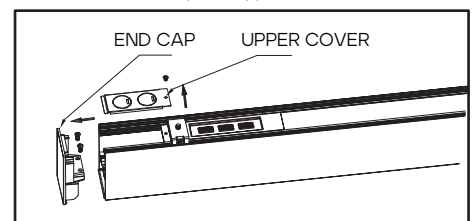


3. Slide the splicing bracket B into locating piece, then lock it with screws.

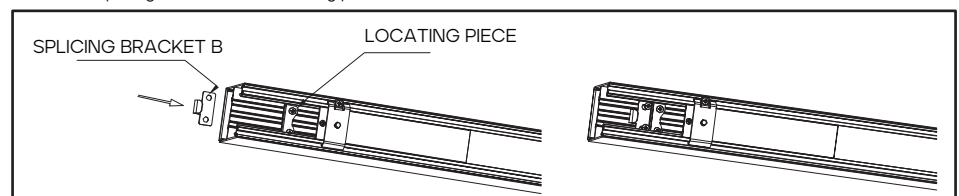

## WIRING

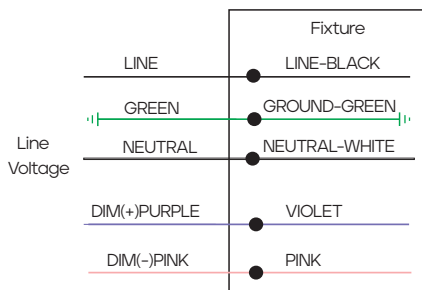


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation

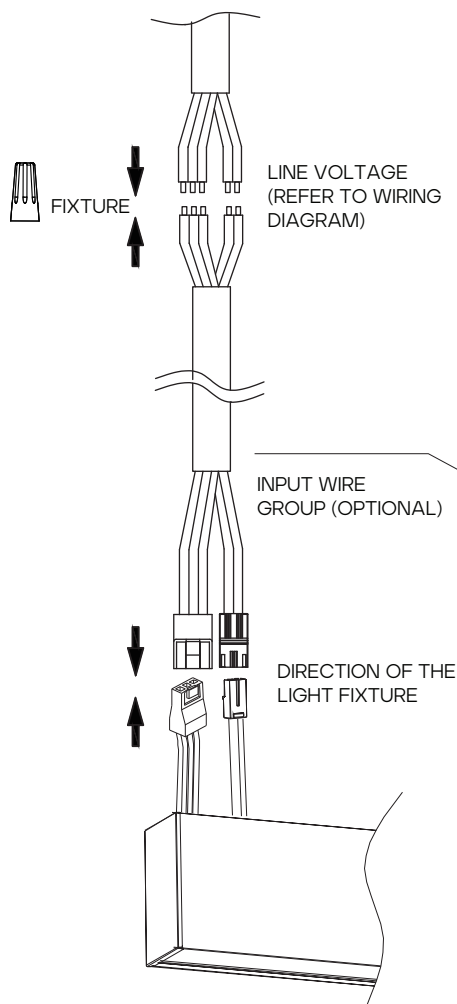

THREE TERMINALS: NEUTRAL WIRE, LIVE WIRE, GROUND WIRE.  
TWO TERMINAL: DIM+ (PURPLE), DIM- (PINK)

4. Insert the 6" joiner into the fixture as shown below, and pull the lock buckle to splice the fixtures.

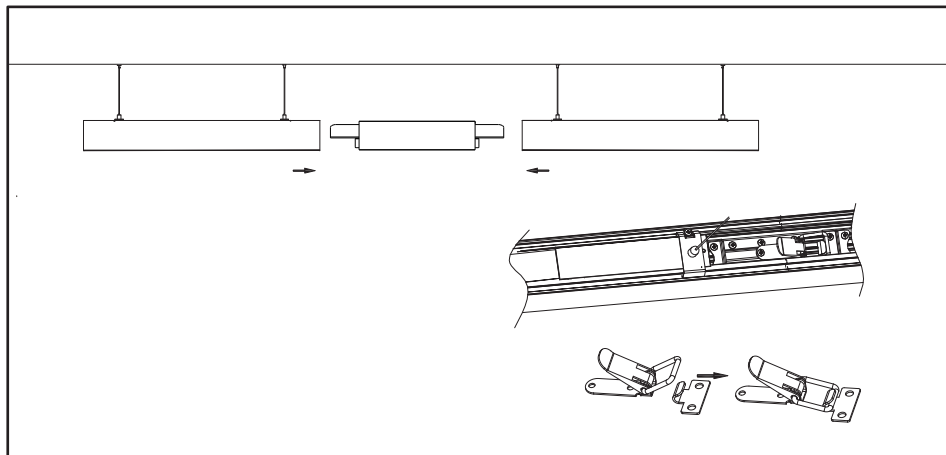

5. Make electrical connection with male-female connectors.

