说明书
110x90 mm
110g双铜+哑胶

TELESIN

For RODE Wireless Go/Go II

Allin Box Charger

USER GUIDE/使用说明

Production Introduction

It is suitable for Wireless Go/Wireless Gollproducts, which are used for both storage and charging. Because it can detect abnormal charging, it can keep the device using for a long time.

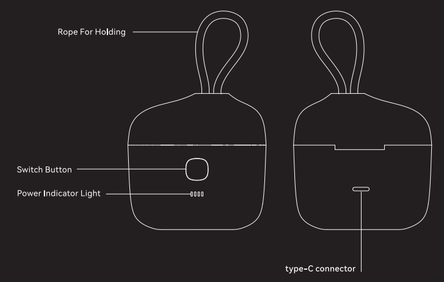

Use Method

When using the product for the first time it needs to be activated by charging with the adapter.

Indicator light

1. The power indicator is blue and all four lights are lit up to indicate a full charge.
2. There are three microphone charging positions inside the case, plug in the microphone and the power indicator light will be on, which means it starts charging.

Type-C connector

1. When the microphone is charging, the Type-C connector on the back does not have a fast charging function, at this time the fast charging is turned off to protect the battery and prolong the life of the charging case.
2. The Type-C connector on the back of the charging case can be used to charge other devices.

Key

1. Press once to turn on the battery indicator and then turn off automatically after 32 seconds with no charging output.
2. Press twice quickly, the power indicator goes off and the charging function is switched off, which stops charging.
3. Press and hold for 10s to reset the whole system (used when the microphone is not recognised when plugged into the charging port).

Product Parameter

USB-Type-C charge output	Type-C*3 (5V/500mA)
Type-C*1 (Output specifications:	Type-C*1 (Output specifications:5V/3A; 9V/2A; 12V/1.5A, supports Qualcomm QC2.0/3.0 and USB PD2.0/3.0 protocols. Also compatible with FCP/AFC input/output fast charging protocols, intelligent identification of power supply devices and power-using devices)
Battery capacity	3.7V/4000mAh high performance polymer battery cell
Working temperature	0℃~45℃
Housing material	ABS
Size	93*63*88
Maximum full charge time	About 2 hours
Applicable equipment	Wireless Go/Wireless Go II Microphone line of products

Charging

Power C (%)	D1	D2	D3	D4
full	on	on	on	on
75%≤C	on	on	on	1.5Hz flash
50%≤C＜75%	on	on	1.5Hz flash	off
25%≤C＜50%	on	1.5Hz flash	off	off
C＜25%	1.5Hz flash	off	off	off

Discharging

Power C (%)	D1	D2	D3	D4
C≥75%	on	on	on	on
50%≤C＜75%	on	on	on	off
25%≤C＜50%	on	on	off	off
3%≤C＜25%	on	off	off	off
0%＜C＜3%	1.5Hz flash	off	off	off
C=0%	off	off	off	off

Product Maintenance

- This product should be used and stored in a cool and dry environment, avoid charging in direct sunlight and high temperatures. Once the product is found to be abnormally hot during charging, the power supply should be cut off immediately and person should keep away from it quickly.
- Avoid charging interface contacting with metal conductive object,and avoid internal short circuits that may cause malfunction.
- Please do not drop, knock or shake the product.
- If the product is left unused for a long period of time, it should be cycled once within 3 months for a complete charge and discharge.

产品介绍

适用于Wireless Go/Wireless Go II无线麦克风系列产品，兼顾收纳与充电功能，具备充电异常检测功能，为设备长时间稳定使用保驾护航。

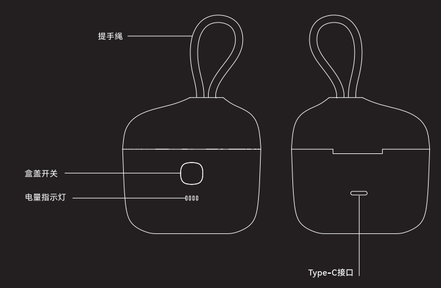

使用方法

首次使用产品时需要使用适配器充电激活。

指示灯

1. 电源指示灯为蓝色，四格指示灯皆亮即为满电状态。
2. 盒内设有三个麦克风充电位，插入麦克风，电源指示灯即亮起，即开始充电。

充电接口

1. 麦克风充电时，背面Type-C接口无快充功能，此时快充关闭以保护电池，延长充电盒使用寿命。
2. 充电盒背面Type-C接口可为其他设备充电。

按键

1. 轻按一下，电量指示灯亮起，32秒后无充电输出，自动熄灭。
2. 快按两下，电量指示灯熄灭，关闭充电功能，此时停止充电。
3. 长按10s可复位整个系统（当麦克风插入充电口无法识别的时候使用）。

产品参数

USB-Type C充电输出	Type-C*3 (5V/500mA)
USB-Type C PD充电输入/输出	Type-C*1（输出规格：5V/3A；9V/2A；12V/1.5A，支持高通QC2.0/3.0与USB PD2.0/3.0协议，同时兼容FCP/AFC 输入/输出快充协议，智能识别供电设备与用电设备）
电池容量	3.7V/4000mAh高性能聚合物电芯
工作温度	0℃~45℃
外壳材质	ABS
尺寸	93*63*88
最大充电满电时间	约2小时
适用设备	Wireless Go/Wireless Go II无线麦克风系列产品

充电时

电量C (%)	D1	D2	D3	D4
充满	亮	亮	亮	亮
75%≤C	亮	亮	亮	1.5Hz闪烁
50%≤C＜75%	亮	亮	1.5Hz闪烁	灭
25%≤C＜50%	亮	1.5Hz闪烁	灭	灭
C＜25%	1.5Hz闪烁	灭	灭	灭

放电时

电量C (%)	D1	D2	D3	D4
C≥75%	亮	亮	亮	亮
50%≤C＜75%	亮	亮	亮	灭
25%≤C＜50%	亮	亮	灭	灭
3%≤C＜25%	亮	灭	灭	灭
0%＜C＜3%	1.0Hz闪烁	灭	灭	灭
C=0%	灭	灭	灭	灭

产品养护

- 本产品应该在阴凉干燥的环境下使用与保存，避免在阳光直射的、高温的环境下充电。充电过程中 一旦发现产品温度异常发烫，应该立即切断电源，同时人员要迅速远离。
- 充电接口避免与金属导电物接触，避免内部短路造成使用故障。
- 请勿摔落、敲打或摇晃本产品，影响本产品运行的行为。
- 本产品长期闲置，应3个月以内做1次循环使用，进行1次完整的充放电工作。

www.telesin.cn

❶

卡纸类生产检验标准
1.包装盒尺寸允许误差范围±1mm
2.模切整齐，无爆边，无皱角，爆角
3.印刷清晰，颜色准确，无色系偏差，无墨点，脏污，允许走位±1.5mm
4.粘贴位齐平，无残胶，溢胶
5.划痕允许范围A级面：无触感L≤20mm,w≤0.5mm,QTY≤1mm可接受，
B级面：无触感L≤30mm,w≤1mm,QTY≤2mm可接受，

包装未注尺寸公差：

外箱/纸板未注公差：±3mm　　丝印/雕刻纸板未注公差±0.2mm
彩盒纸类未注公差：±1mm　　泡棉未注公差±0.5mm
吸塑未注公差：±0.5mm　　布包未注公差±1mm

编号	物料名称	物料代码	材质	工艺	尺寸
❶	德麦克风充电盒-说明书		110g双铜+哑胶		110x90mm

图纸变更历程				
结构	印刷	变更内容	签名	日期

名称		尺寸		型号	TE-WMB-001	日期	20220420
材质		表面处理		比例	1	版次	A/1	页次	
TELESIN	深圳市泰迅数码有限公司		类型	外购产品	审核		确认		制图	江虾仔