

WishAlarm 9" Alarm Clock Radio

(SAF004B)

Instructions

Please read the instructions carefully before using and keep it with proper storage

(v1.0)





-Scan QR Code to Download User Manual-




Content

| | |
|---------------------------|----|
| Elements | 01 |
| Controls | 01 |
| Quick guidance | 02 |
| Feature description | 02 |
| Usage | 03 |
| Specification | 10 |
| Cautions | 10 |
| Storage | 10 |


Elements

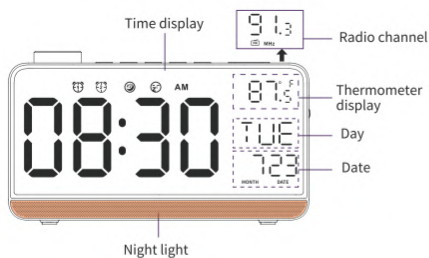

Controls



- | | | |
|---|--|--------------------------------------|
| 1 | | Snooze/ Light switch/ Tuning knob |
| 2 | | FM radio |
| 3 | | Alarm 1 Alarm 2 |
| 4 | | Sleep Aid |
| 5 | | Setting |
| 6 | | Brightness control |



- | | |
|--|--------------------------------|
| | Colon flashing Solid switch |
| | 12-hour 24-hour display |
| | °C/°F |
| | Volume control |

Quick Guidance

Radio

FM radio Rotate to change radio stations Volume control

Press to turn on/off FM radio;

Scroll up and down to adjust the volume;

Press and hold to automatically scan and save radio stations;

Slowly rotate to find radio stations; fastly rotate to switch to saved stations.

Alarm Clock

Alarm 1 Alarm 2

Press / to turn on/ off the alarm;

Press and hold / to set the alarm, rotate to adjust the hour and alarm volume.

Sleep-Aid

Sleep-aid

Press to switch on/ off sleep-aid mode;

Press and hold to enter setting, rotate to choose options, press to apply.

Night Light Mode

Night light

Brightness control

Press to switch on/off night light;

Use to adjust the brightness level.



Additional Settings

Press to turn on/off flashing colon (delimiter)

Press to switch to 12-hour clock/ 24-hour clock

Press to switch to °C/°F

General Settings

Setting

Press to adjust the brightness of the screen

Attention: The screen brightness is self-adjusting according to surrounding lighting brightness under Automatic mode.

Press and hold to enter time setting, rotate to calibrate the date, day and hours, press again to apply.

Attention: During the connecting process, if there is no action within 15 seconds, SAF004S would resume to its home screen.


Feature Description

- SAF004S is a piece of smart furnishing that combines the functionalities of a digital alarm clock, a weather display, radio, an Amber LED light night, and a sleep-aid white noise machine.
- The 15° incline design on the screen positioning works better with average eye-level height (in America), provides a comforting look with its soothing night light.
- Conspicuous display with 2.2 inches on single digit from a 9-inch screen, switchable from am/pm to 24-hour system. 4 adjustable brightness levels for time display (time display can also be shut off solely as well as automatically adjust its brightness level accordingly via its built-in ambient light sensor).
- Multi-element digital screen, shows weather/temperature/date/day in real time.
- Easily switch from 12-hour clock to 24-hour clock.
- Hi-Fi speaker, delivers high quality audio output.
- Radio stations auto-scanning, stores up to 60 stations, can be paired with 3.5mm headphones.
- 2 separated alarms with 6 nature sound options (all sounds from radio can be used alarm sound as well).
- Muted night light with designed white noise or radio sound as a sleep-aid, you can set an off-timer with the light gradually dims and the sound slow mutes while you fall asleep.
- Built-in amber-color light strip, brightness level adjustable from level 1-10, offers soft, warming lighting.



Usage

Set the functions



1. Set the time and date

① Plug in to power, press and hold  to enter the date/time setting;





② Rotate  to change the calendar year, press  to apply and enter calendar month setting;





③ Rotate  to change the calendar month, press  to apply and enter calendar day setting;





④ Rotate  to change the calendar day, press  to apply and enter time setting;




⑤ Rotate  to change the hour, press  to apply and enter minute setting;



⑥ Rotate  to change the minute, press  to complete the time setting.



2. Brightness control


Plug in to power, press  to adjust the brightness on display screen, in the order of "day" "night" "closed" "Auto".



Attentions: blocking the ambient light sensor when set in AUTO brightness mode might affect the functioning of the brightness self-adjustment.

3. Colon(delimiter) flashing/solid switch (flashing by default)

Press  to turn on/off flashing colon(delimiter).

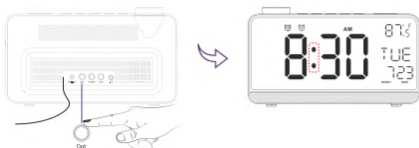


4. 12-hour/24-hour clock display switch(12-hour clock system by default)

Press  to switch between 12-hour clock/ 24-hour clock.




5. Temperature display switch between °C/°F(°F by default)


Press  to switch between °C/°F display.



FM radio


1. Turn on/off FM radio



① Turn on the FM radio: click the  key to turn on the FM radio. (default frequency 87.5MHz), the screen displays the radio icon;

② Turn off the FM radio: click the  key again to turn off the FM radio, the radio icon disappears and the screen displays the temperature icon (Fahrenheit);



2. Set the FM radio


① Auto-scanning: under FM radio mode, press and hold  to automatically find radio stations between 87.5MHz-108MHz, all radio stations found will be saved and the first found accessible radio station will be entered and displayed.

② FM radio stations tuning: fastly rotate  to switch between saved radio stations, slowly rotate  to manually find radio stations.




Alarm Clock

1. Turn on/off alarm (take alarm 1 as demonstration)

① Under time-display interface, press  to turn on alarm clock. the flashing digital lights indicates the alarm time, corresponding alarm clock icon stays solid.



② After turning on the alarm clock, press  to turn off the alarm clock, corresponding alarm clock icon turns off as well.




2. Separated setting

SAF004S comes with two alarm clocks in order to provide alarming at two different times, both alarms should be set under completely the same process.



For instance, you can set **“alarm 1”** as your morning wake-up alarm, and **“alarm 2”** as your afternoon nap alarm.

SAF004S can set week-day alarms and weekend-alarms via Smart Life App directly.



3. Alarm setting (take alarm 1 as demonstration)

① under time-display interface, press and hold  to enter alarm setting mode, alarm icon flashes;






② Rotate  to change the hour, press  to apply and enter minute setting;






③ Rotate  to change the minute, press  to complete the time setting and enter the alarm sound selecting.




④ rotate  to select the alarm sound (S-01 to S-06 are nature sounds, F-07 uses FM radio as alarm sound) press  to apply and complete alarm setting.




* Uses FM radio as alarm sound: tune in to F-07 when selecting alarm sound, press  to enter FM radio station selecting, then rotate  to select the desired radio station, press  to complete FM radio alarm sound setting and turn on alarm mode.



Attentions: use  to control the volume of alarm sound.

Snooze (gives you multiple 9-minute naps before completely waking up)

1. Activate/Deactivate snooze mode

① During the alarm beeping, press  to enter snooze mode(alarm sound pause for 9 minutes), light digits flash. you can enter snooze mode repeatedly up to 5 times;

② Under snooze mode, press the corresponding alarm clock button to exit;




③ Double-press alarm clock button to shut down the alarm completely.




The alarm gets automatically shut down completely after 30 minutes of beeping without any operation on SAF004S.

Sleep-aid mode

1. Activate/deactivate sleep-aid mode


① Under time-display interface, press  to turn on sleep-aid, the preset duration of sleep-aid mode off-timer will be displayed for 3 seconds with sleep-aid icon stay solid;





② Press  to deactivate sleep-aid mode, with sleep-aid icon turns off.






2. Sleep-aid settings

① Under time-display interface, press and hold  to enter sleep-aid setting mode, sleep-aid icon flashes;




② Rotate  to select sleep-aid sound (S-01 to S-04 are sleep-aid white noise simulating great nature sounds, F-05 uses FM radio stations as sleep-aid sounds), press  to apply and enter night light brightness control;






★ Uses FM radio as sleep-aid sound: tune in to F-05 when selecting sleep-aid sound, press  to enter FM radio station selecting, then rotate  to select the desired radio station, press  to complete FM radio sleep-aid selecting and enter night light brightness control.




③ Rotate  to control the night light brightness. (up to 10 levels of brightness optional, level 8 by default)




④ Rotate  to adjust the sleep-aid mode duration (from 5 to 120 minutes, 30 minutes by default), press  to apply and activate sleep-aid mode.



Attentions: use  to control the volume of sleep-aid sound.

Night light mode

1. Turn on/off night light



① Press  to turn on night light (shows you the brightness level for 3 second, level 8 by default);



② Double-press  to turn off the night light;




2. Night light brightness control

After turning on the night light, press  "+" to brighten the night light, press  "-" to darken the night light. (from level 1 to level 10)








USB charging output

USB 5V output, available for charging.



Specification

| | |
|--------------------|---|
| Model | SAFW004B |
| Size | 220×126.6×71.6mm |
| Weight | 374g |
| Color | Black |
| Material | ABS+PC、metal |
| Communication mode | — |
| FM radio frequency | 87.5-108MHz |
| Control mode | Button control |
| Input | DC 5V-2A |
| Output | USB A 5V-1A |
| Power | 10W (MAX) |
| Speaker | 4Ω 3W |
| Packing list | Large Display Radio Clock , user guide, adapter (optional), charging cable (optional) |
| Certification |      |

Cautions

- Please use the product correctly according to the instructions. Disassembling and collision are strictly prohibited.
- Please place the product on a stable, horizontal, and non-smooth surface.
- Do not use it in high temperature, humidity and corrosive environment to avoid electric leakage due to circuit damage.
- Please keep it in a proper place and out of reach of children to avoid accidents.
- This product is not fireproof, do not throw it into the fire, and do not place it close to any fire source.
- This product is not waterproof, do not put it into the water to avoid damage.

Storage

- Please wipe the product with a soft cloth.
- Do not scrub the product with abrasive cleaner, rough chemical, alcohol or acetone detergent to avoid damage to the surface of the product.
- Store the product in a safe, dry place where it will not be crushed, bruised or damaged.
- Do not wrap the power cord around the appliance during storage.