


High Speed Hand Dryer

DESIGN IDEAS


- **Novel**
- **Modern**
- **Tasteful**
- **Technological**

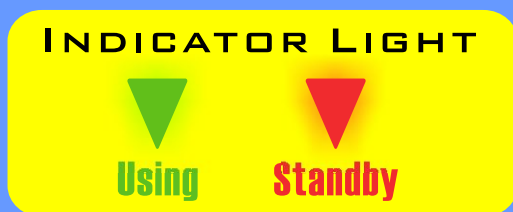


High Brightness LED



HK-JA 01- **Steel cover;**
porcelain enamelled coating.
(White) (t:1.6 mm)

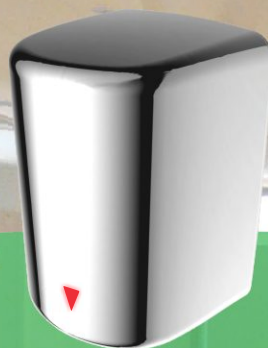

HK-JA 02- **Steel cover;**
bright chromed. (t:1.6 mm)

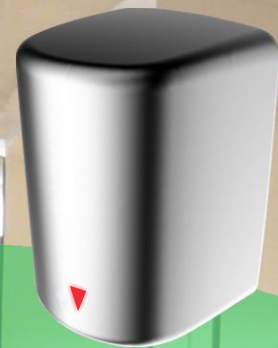

HK-JA 03- **Steel cover;**
satin chromed. (t:1.6 mm)

HK-JA

Jet airflow

High Speed Hand Dryer

Save Power,
Save Environment,
and Save Your Money

TECHNICAL SPECIFICATIONS**ITEM CATEGORY**

Operating Voltage

Warm Air Speed Output

Motor Type

Motor Thermal Protection

Motor Overload Protection

Heater Element

Heater Thermal Protection

Drying Time

Circuit Operation

Sensor Range

Timing Protection

Drip proof

Isolation

Net Weight

Shipping Weight

Unit Size

PERFORMANCE DATA

110-120 Vac, 50/60 Hz, 1.3-1.6 KW,

220-240 Vac, 50/60 Hz, 1.3-1.6 KW

75-100 m/s (169-225 mi/hr), adjustable

350-700W, 12000-18000 R.P.M, adjustables;

Brush Type, Dual Ball Bearings

Auto Resetting Thermostat turns unit off at 105°C {221°F}

Motor assembly designed with over current fuse, replaceable.

450-900W, adjustable

Auto Resetting Thermostat turns unit off at 85°C {185°F};

Thermal fuse cut unit off at 142°C {288°F}

Less than 10-15 seconds

Infrared Automatic, self adjusting

51 mm to 330 mm [2" to 13"], adjustable;

standard 180 mm±20 mm [7"]

60 seconds auto shut off

IPX1 ▲

CLASS 1

5.8 kg [12.8 lbs]

6.6 kg [14.6 lbs]

205 mm W x 287 mm H x 180 mm D

[8-5/64" x 11-19/64" x 7-3/32"]

We use high brightness LED to increase the ease of use

CASING:

HK-JA 01 - Steel cover; Porcelain enamelled. (t:1.6 mm)

HK-JA 02 - Steel cover; Bright chromed. (t:1.6 mm)

HK-JA 03 - Steel cover; Satin chromed. (t:1.6 mm)

HK-JA 04 - Stainless steel; Bright finished. (t:1.5 mm)

HK-JA 05 - Stainless steel; Satin finished. (t:1.5 mm)

Patent:

USA EUROPE CHINA TAIWAN