

Touchless Hand Dryers

Recessed Model PDC-R10

- ightharpoonup Stainless Steel Cover and Drying Chamber
- ightharpoonup Virtually Vandal Proof
- \longrightarrow Low Power Consumption
- → ADA Compliant

PLACE HANDS IN DRYER

Ideal for :

(0)

Schools

Prisons

DOT Rest Areas

Restaurants

Universities

Convenience Stores

Hospitals


Parks and Rec





PINNACLE DRYER CORPORATION

Recessed Model PDC-R10

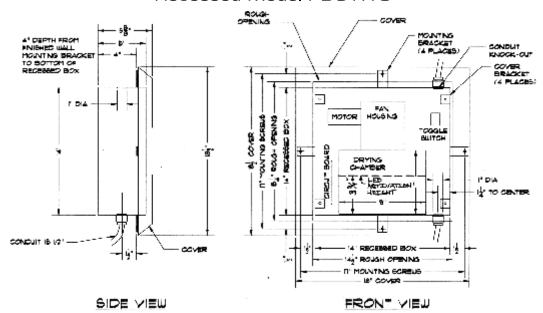

Technical Information

MOTOR - Heavy Duty, 7500 RPM, Double-insulated, CSA & UL Component Approved

POWER CONSUMPTION – 11.5 amps 1.37 KW at 120 Vac Nominal

FAN ROTOR - Pressed, Galvanized and Electrically balanced delivering 150 cfm

HEATING ELEMENT – 1000W Heavy-duty, thermally protected to cut out at 90 C.

WARRANTY - Limited 10 year warranty

COVER – 18 gauge stainless steel

CIRCUITRY— All new solid state circuitry has completely eliminated all mechanical parts. Unit is activated by infra-red sensor when hands are placed in drying chamber. Dryer operates only when in use.

DRYING TIME – Complete drying is accomplished in 20-25 seconds.

WEIGHT - 20 lbs.

SAFETY – Five Levels of Over-Temperature Protection

INSTALLATION

The "Pinnacle" touchless hand dryer must be installed on a 20 AMP dedicated circuit and must be properly grounded. We recommend installing dryers on a GFI breaker.

CAUTION: Route Field Wiring Connections Away from Moving Parts. Disconnect from Power Before Servicing.

Dryer must be installed in accordance with the National Electric Code (NEC) and any local or state codes.

Mount Model #PDC-R10 in cut-out of wall after construction of finished wall is complete. 4" depth from mounting brackets to rear of recessed box requires mounting on finished wall surface. Knock-outs for conduit are provided on the top and bottom right side of the recess box, 1.5" from the right side to the center of the knock-outs.

FOR THE UNIT TO FUNCTION PROPERLY INSTALLATION SHOULD BE COMPLETE AND THE COVER IN PLACE.

> RECOMMENDED MOUNTING HEIGHTS (check Code requirements in your area) Distance from Floor to electronic eye in Drying Chamber:

Men's Washrooms	46"(117 cm)
Women's Washrooms	44"(112 cm)
Children's Washroom's (ages 4-7	7 yrs)32"(81 cm)
Children's Washroom's (ages 7-1	10 yrs)36"(91 cm)
Children's Washroom's (ages 10-	13 yrs)40"(102 cm)
Children's Washroom's (ages 13-	17 vrs)44"(112 cm)





WARRANTY

PINNACLE DRYER CORPORATION EXTENDS A **TEN (10) YEAR LIMITED WARRANTY** ON REPLACEMENT PARTS. This warranty applies only to the original purchaser and is effective from date of purchase. Liability other than replacement of defective parts will not be accepted by the company. This warranty does not include parts damaged due to electrical storms and other acts of nature. As "Pinnacle" hand dryers are designed to be repaired very easily without removal from the wall, shipping and factory labor costs are normally eliminated, in the event the purchaser prefers to return the hand dryer to the factory for repair, all parts under warranty will be repaired with purchaser paying a \$30.00 service charge and all freight costs. This warranty is limited to replacement of defective parts only and does not apply to normal wear and tear, malicious damage, vandalism or improper installation. All defective parts must be returned prepaid to the factory along with hand dryer serial number.



