

MHBAJ Series

Linear High Bay

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

DESCRIPTION



Our linear high bay light is a cost-efficient solution and great replacement for metal halides, HID or CFL Bulbs. Upgrading to LED can save you money on yours electricity bill, improve visibility, help you work safely, and enhance productivity.


COLOR TEMPERATURE
5000K
DAY LIGHT



Product Information

Model No.	Product Name	Lumens	Watts	Efficacy	CRI	VOLTAGE	DIMMING	CCT	LIFE	OPERATING TEMP.
MHBAJ24-220W-50K	Adjustable Panel High Bay	29700lm	220W	135m/w	80+	120-277V	0-10V	5000K	>50,000hrs	-4°F ~ 104°F

DIMENSIONS

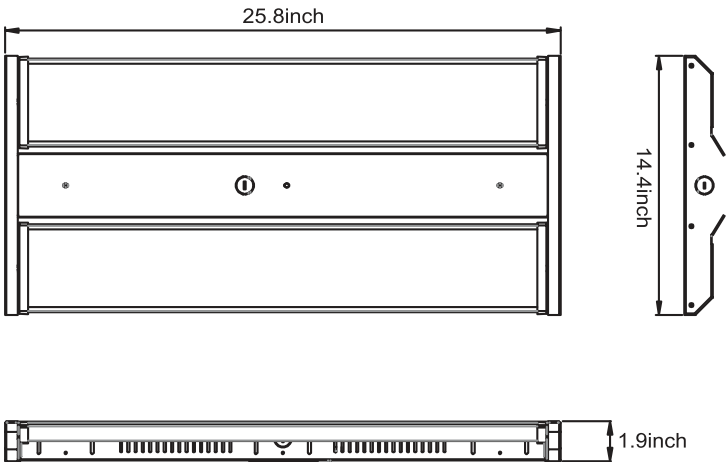

M

H

AJ

2

4

220W

-

50K

MW
MW Light

HIGH BAY
High Bay

ADJUSTABLE
Type

2FT
2'

4 PCB
PCB

220W
Wattage



5000K
CCT

MHBAJ Series

Linear High Bay

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

PHOTOMETRY

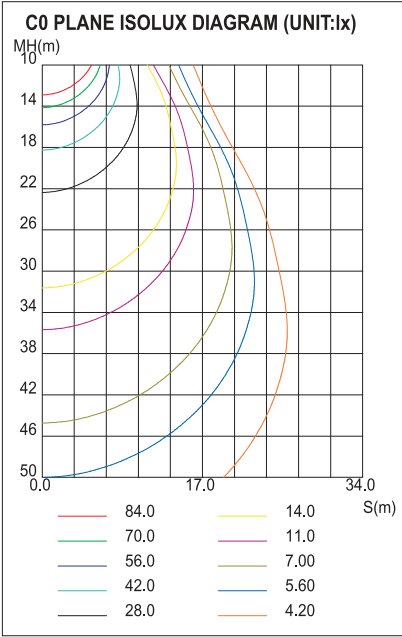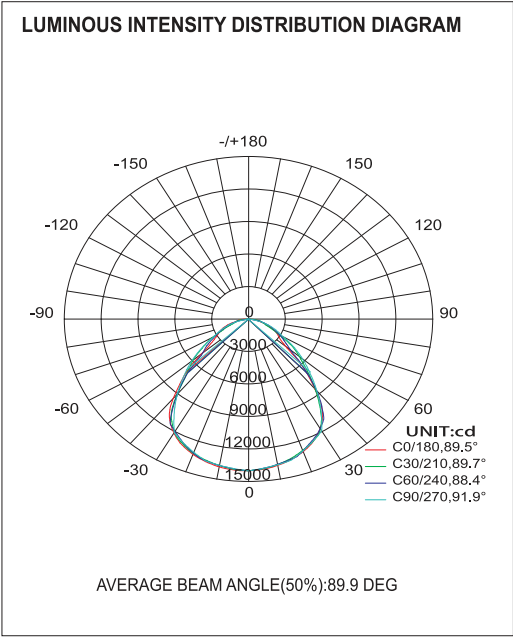

TECHNICAL SUMMARY

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, and lens.
- High quality frosted PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- CRI 80+

DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- Ceiling mounting.
- Pendant mount.


LISTING

- DLC Listed.
- UL 8750 LED equipment in lighting products.


WARRANTY

- 5 years manufacturer warranty, consult factory for more details.
- Terms and conditions may apply.

Package Contents

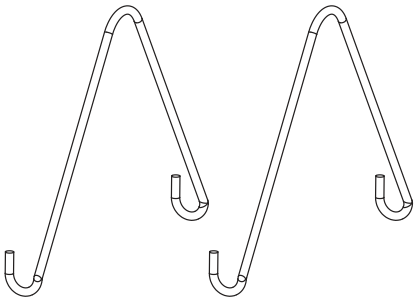

Suspending Hook

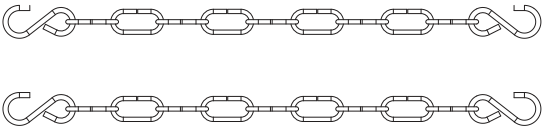

Hanging Chain

MHBAJ Series

Linear High Bay

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

FEATURES



ACCESSORIES



MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage $\leq 175\text{Vdc}$



MBRI1819-B-O

120-277V On/Off Passive
Infrared Occupancy Sensor



MBRI1819-B-D

Bi-level passive infrared
Occupancy Sensor