


KAIA

TRAP


INSTALLATION MANUAL

TRAP
Wall Sconce
30



Type	Wall/ Ceiling light
Material	Stainless Steel
Environment	Indoors
Dimension	504 x 35 x 24 mm
Weight	1.8 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	max. 60W, S14d, our suggestion: 3,1W, 1x linear opal LED, 2700K, 275lm, Mains (Phase) dimmable* EPREL ID 566201, 522905;

STEP 1 FRONT VIEW




screw size max. Ø4 mm

INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

1. Remove the base from the installation bracket.
2. Affix the bracket to the ceiling/wall with 2 screws (hole size max. 4 mm). Attach two more screws above and below the bracket on the wall. Connect the unit to the mains.
3. Fix the unit back on its base and tighten 2 screws on the side.
4. Place the lamp in the unit.
5. Put the cage over the lamp and hang it on the screws in the wall.


STEP 2 SIDE VIEW

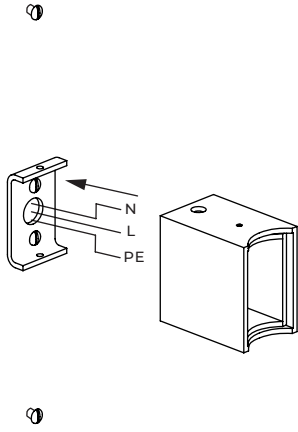


STEP 3 SIDE VIEW

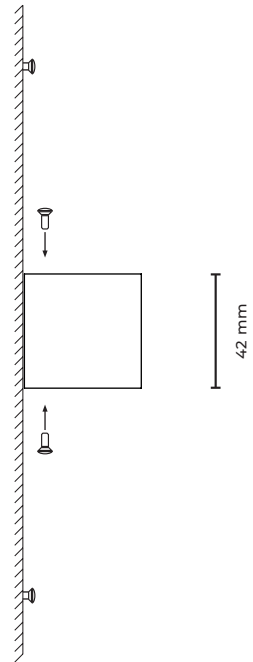

STEP 4 SIDE VIEW

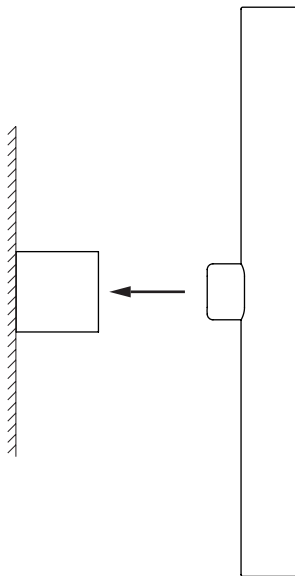

STEP 5 SIDE VIEW

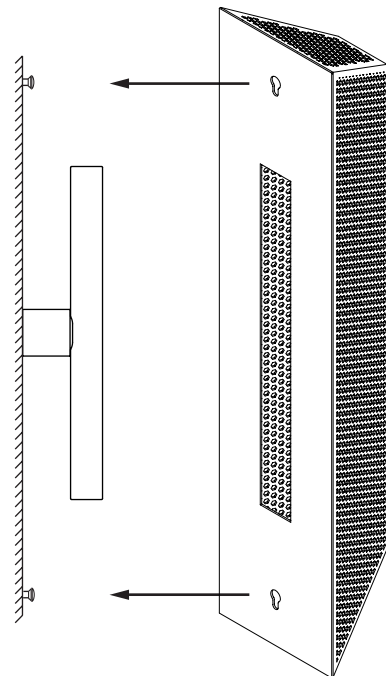

LAMP INSTALLATION

- Before commencing installation ensure the relevant mains supply has been switched off.
- Use supplied fabric gloves to prevent any stains on the surface of the lamp.
- Due to risk of glass fracture handle the lamp with care!
- Whilst applying pressure push the socket into the lamp holder in the marked place. Remove the lamp from the lamp holder carefully with both hands.

CARE INSTRUCTIONS

* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

** Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.