Model XA5-974 Hand Dryer



Most Durable Standard Automatic Hand Dryer

World Model XA5-974 hand dryer is an automatic hand dryer with the longest motor life and the best washroom solution for all high traffic applications.

Product Benefits

- · Automatic operation
- · Longest life of all dryers
- · Lowest sound level
- · Durable and vandal resistant
- · Classic style design

Design Features

Dryer

- · Activated by infrared sensor
- · Automatic drying cycle
- Incorporates a 2100 (optional 1500) watt Nichrome wire heating element Protected by an automatic-resetting, thermal cutoff
- Provides a 70°F temperature rise
- IPX1 ingress protection

Motor

- Thermally-protected, universal brush-type motor operating at 7,500 RPM
- · Delivering 200 CFM air flow at a velocity of 7,300 LFM

Materiale

- Cover Material: white porcelain enamel finish on 1/4" thick cast iron.
- The wall-mounted base is constructed of die-cast aluminum
- The nozzle is constructed of die-cast zinc alloy finished in bright chrome

Architecture & Engineering Specifications

World Dryer Model XA5-974 hand dryers shall include a cover made of 1/4" thick cast iron with white procelain enamel finish. Motor shall be universal type, 1/10 HP at 7500 RPM. Dryers shall deliver 200 cubic feet per minute of air volume (7300 LFM). Infrared sensor detect hands initiates and terminates drying cycle. High-tech sensor control to provide 1,000,000 dry cycles. Hand dryers shall be listed under reexamination service of Underwriters Laboratories, Inc.

Stock #	Cover Finish	Cover Material	Electrical	Unit Weight
XA5-974	White	Cast Iron	115V (20 Amp)	29 lbs / 13.3 kgs
XA52-974	White	Cast Iron	115V (15 Amp)	29 lbs / 13.3 kg
XA54-974	White	Cast Iron	208V - 230V	29 lbs / 13.3 kg
XA57-974	White	Cast Iron	277V	29 lbs / 13.3 kg



Model XA5-974 Product Specications

Electrical


	115 V	115 V	208 - 230 V	277 V
Amps	20	15	10	8.5
Watts	2300	1725	2300	2300
Hz	60	60	60	60

Unit Size (HxWxD) inch/mm -

 $9.5" \times 11.3" \times 8.3"$ 241 mm x 287 mm x 211 mm

Shipping Size (HxWxD) inch/mm

 $12.5" \times 14.4" \times 10.1"$ 317 mm x 366 mm x 256 mm

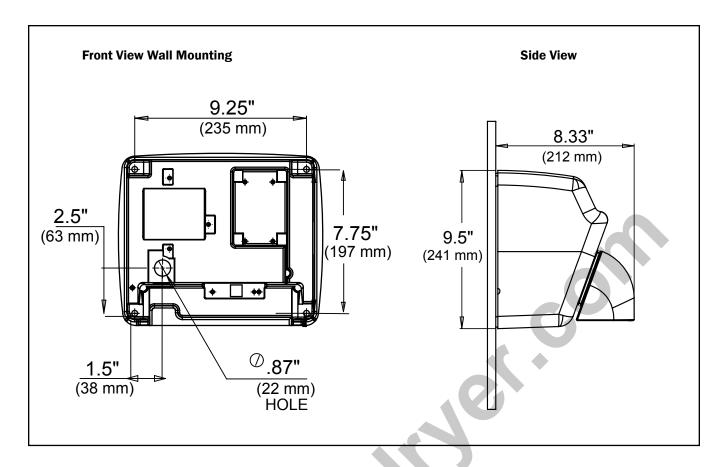

Placement Instruction

- Hand dryers should be spaced at least 2' apart, near but not over the wash basin
- Automatic dryers should be located more than 18" above or away from any reflective surface that may interfere with the sensor operation.
- In congested areas, dryers should be located to create a flow from wash basin to dryer to exit
- Dryer Quantity Recommendation:

Average Traffic: 1 dryer per 2 wash basins Heavy Traffic: 1 dryer per wash basin

Industrial 54" Circular wash fountains: 4 dryers per sink

· Recommended mounting heights from floor to dryer bottom edge

Men's washrooms	46" (117 cm)
Women's washrooms	44" (112 cm)
Children's washrooms, ages 4-7	32" (81 cm)
Children's washrooms, ages 7-10	36" (91 cm)
Children's washrooms, ages 10-13	40" (102 cm)
Children's washrooms, ages 13-17	44" (112 cm)
Handicap Mounting Height	37" (94 cm)

Measured from floor to the bottom of the unit.

Installation Guide

- Model XA5-974 hand dryers require a dedicted 20 AMP circuit and must be properly grounded.
- · GFI circuit protection is recommended.
- · One side of dryer should be mounted to a stud

Certification Approved











Warranty



10 year limited warranty 5 year on sensor

