


LASER INDICATE RECEIVER & WIRELESS REMOTE DISPLAY



Low-cost indicate solutions

- SMALL, LIGHTWEIGHT DESIGN
- 270° DETECTION
- RUGGED, WATERPROOF DESIGN
- WIRELESS SUPPORT & CAN SUPPORT
- BRIGHT INDICATOR LIGHTS
- MAGNETIC: USE ANYWHERE

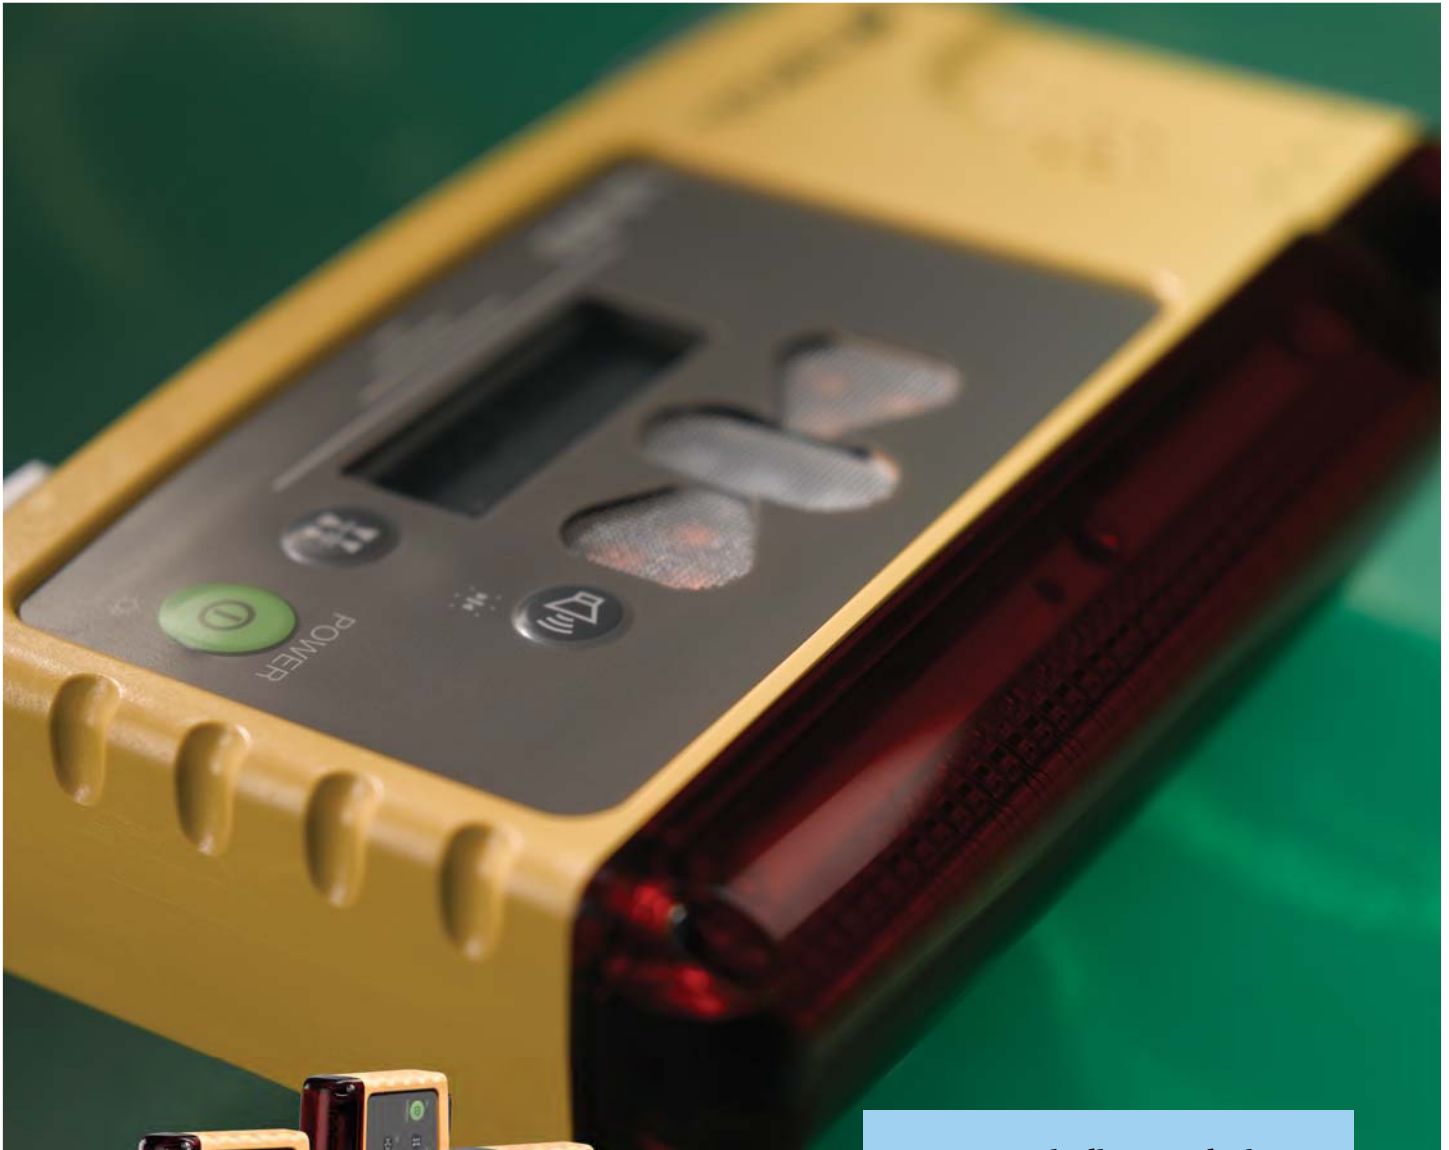

- The LS-B10 Series are low-cost indicate solutions that were designed with two purposes in mind; to help move dirt, and grow with your company.

- These versatile new lasers can be mounted on a array of machines, while their small, lightweight design allows them to be attached to a rod for grade checking applications as well.

- To Increase visability, an RD-10W (remote display unit) can be mounted in the cab allowing the operator to view the same information that is displayed on the LS-B10W via wireless connection.



- Integrated CAN support in the LS-B10W means that this system is provided with the flexibilty to be used with future indicate and automatic machine control systems.

Offices Worldwide

TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku • Tokyo 174-8580, Japan
Phone: 3-3558-2520 • Fax: 3-3960-4214 • www.topcon.co.jp

Topcon Europe Positioning B.V.

Essebaan 11, 2908 LJ Capelle a/d IJssel • THE NETHERLANDS
Phone: 010-4585077 • Fax: 010-4585045 • www.topconeurope.com

Topcon Corporation Beijing Office

Block A No.9, Kangding Street, Beijing Economic
Technological Development Area, Beijing 100176 • CHINA
Tel: +86-10-6780-2799 • Fax: +86-10-6780-2790



Topcon Positioning Systems, Inc.

7400 National Drive
Livermore, CA 94550
www.topconpositioning.com

Specifications subject to change without notice
©2006 Topcon Corporation All rights reserved.
P/N: 7010-0789 Rev. A Printed in U.S.A. 12/06

Specifications

LS-B10 SERIES

Vertical Detecting Range	4.72" (120mm)
Horizontal Detecting Range	270°
On-grade Zone (LED)	0.08", 0.24", 0.47", 1.18" 2mm, 6mm, 12mm, 30mm
Grade LED Patterns	5 grade, 2 lost beam, 1 low battery, 1 level alert
LED Grade Indicators	Red (▲), Green (■), Red (▼)
LCD Grade Indicators	5 channels on-grade + 10 gradual triangles (±5)

Wireless	LS-B10W: Yes LS-B10: No
----------	----------------------------

Ports	LS-10BW: CAN, Wireless communication LS-B10: N/A
-------	---

Operating Time	LS-B10W: 20h LS-B10: 100h
----------------	------------------------------

Weight	Less than 500g
--------	----------------

Size	4.53 x 1.57 x 7.09" (w/magnet) 115 x 40 x 180mm (w/magnet)
------	---

RD-10W	
Grade LED Patterns	5 grade, 2 lost beam, 1 low battery, 1 level alert
LED Grade Indicators	Red (▲), Green (■), Red (▼)

LCD Grade Indicators	5 channels on-grade + 10 Gradual triangles
----------------------	---

Wireless	Yes
----------	-----

Ports	Wireless Communication
-------	------------------------

Operating Time	40h
----------------	-----

Weight	Less than 1.1lb (500g)
--------	------------------------

Size	4.53 x 1.57 x 7.09" (w/magnet) 115 x 40 x 180mm (w/magnet)
------	---



Versatile

It's ready for any job. From the stick of the excavator to the grade checker's rod, the LS-B10 series will provide reliable millimeter accuracy for depth control.

Affordable

It's cost effective. No other product can give this level of technology for the money. It's truly value at its best.

Durable

It's going to last. Whether we're talking about long battery life, or durable water and dustproof housing, the LS-B10 series is heavy-duty hardware for heavy-duty construction.

Your local Authorized Topcon dealer is: