

- **What electronic devices are supported?**  
Cell phones and tablets up to 9.5 inches tall (when horizontally) that are 1.5 pounds or less. Max device width is just under one inch (20mm). Use support bungee to adjust to your device.
- **What size beverages can fit?**  
All airline cups, plus cans and bottles [up to 16 ounces] using built-in can support.
- **Can I use The Airhook during takeoff and landing?**  
No. Not only is it not safe, it is non-compliant with Stowage Federal Regulations (*why the tray table must be closed too*).
- **Is The Airhook FAA compliant?**  
Yes, according to the rules in the current Code of Federal Regulations. Please note, it is very important [and the law] to always comply with airline crew member instructions.

Please make sure to watch our quick setup video before your first journey with your Airhook. Click or copy the link below.

<http://bit.ly/airhook2>


## AIRHOOK 2.0 INSTALLATION

**Step 1:** Unlock tray table and lower slightly. Place The Airhook's tray table anchor over the top of the tray table, close and lock tray table back up.

**PRO TIP:** Place The Airhook's tray table anchor as close to the center of the tray table as possible (near its locking mechanism) for the most secure setup.

**Step 2:** Push stabilizer bar against tray table surface for added support.

**Step 3:** Adjust Airhook to desired support angle, tighten lower knob until movement is no longer possible.

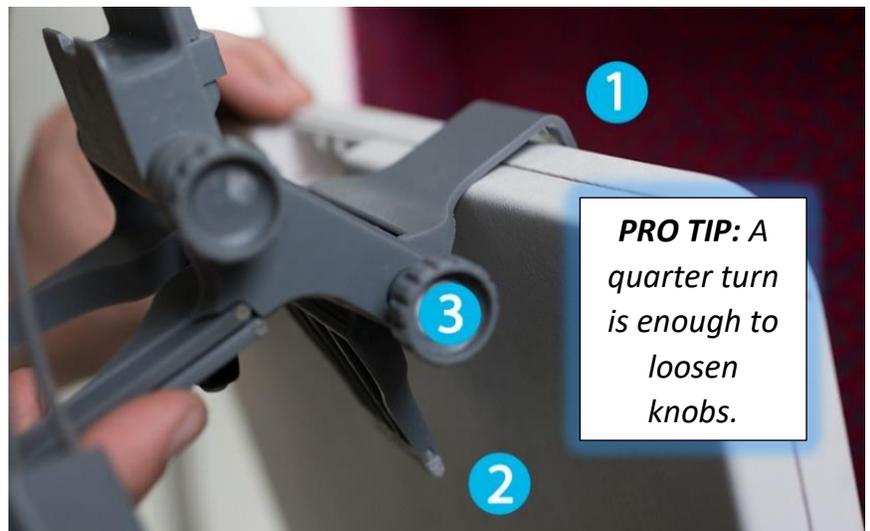

**PRO TIP:** A quarter turn is enough to loosen knobs.



**Step 4:** PLACE electronics device onto Airhook perch and pull device clip over top of device.



**Step 6:** PULL bungee downward to tighten onto device. Release rear tension button to lock.

**PRO TIP:** If you adjusted sizing in advance, pull bungee over top of your device without adjusting size.



**Step 5:** PUSH rear tension knob.

**PRO TIP:** Adjust the bungee size for your device before mounting to Tray Table for easier access to rear of device.



**Step 7:** POSITION device perch to desired viewing angle, tighten upper knob until movement is no longer possible.

## TRAY TABLE SCENARIOS

**Standard Tray Tables [American, Southwest, Delta, United]:** Place as close to the center locking mechanism as possible.

**Double Folding Tray Tables [American]:** We extended the anchor on The Airhook 2.0 to accommodate. Use unrestricted.

**Curved Tray Tables [Alaska, Virgin]:** Place as close to the center locking mechanism as possible, The Airhook cannot be used on the outside heavily curved areas.

**Half Tray Tables [Frontier]:** Standalone mode only. Lower tray table and insert The Airhook's tray table support between the tray table and the support bar.

**Upper Magazine Rack [Alaska]:** Place as close to the center locking mechanism as possible.

**Seat-Back Monitors [Virgin]:** Your entire setup will be outside of the seat's 'screen area'. Use without restrictions.

**First Class, Bulkhead, and Exit Row [All Airlines]:** Standalone mode only. We designed the bottom to be flush, to use fold flat as if you were going to store in your carry-on, then bungee your device on the device perch and set your desired angle. Voila!



## CROSSBAR INSTALLATION [SOLD SEPARATELY]



**Step 1:** Insert Crossbar between the support bars of a vehicle's headrest or luggage handlebars. Pull lever back to release spring tension - push to lock into place.



**Step 2:** Insert The Airhook's tray table anchor into the back opening. Please see The Airhook's instructions for more details.



**Step 3:** Place The Airhook's stabilizer bar on The Crossbar's front ledge or directly on your seat for added support.



**Step 4:** Place a beverage in the cup holder or watch a device like it was built into the headrest! Lower beverage support out of the way if not needed.