

# Zire Chandelier

3190305 | 1.0

GENERATION LIGHTING

## CHANDELIER

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


[www.generationlighting.com](http://www.generationlighting.com)

© 2019 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

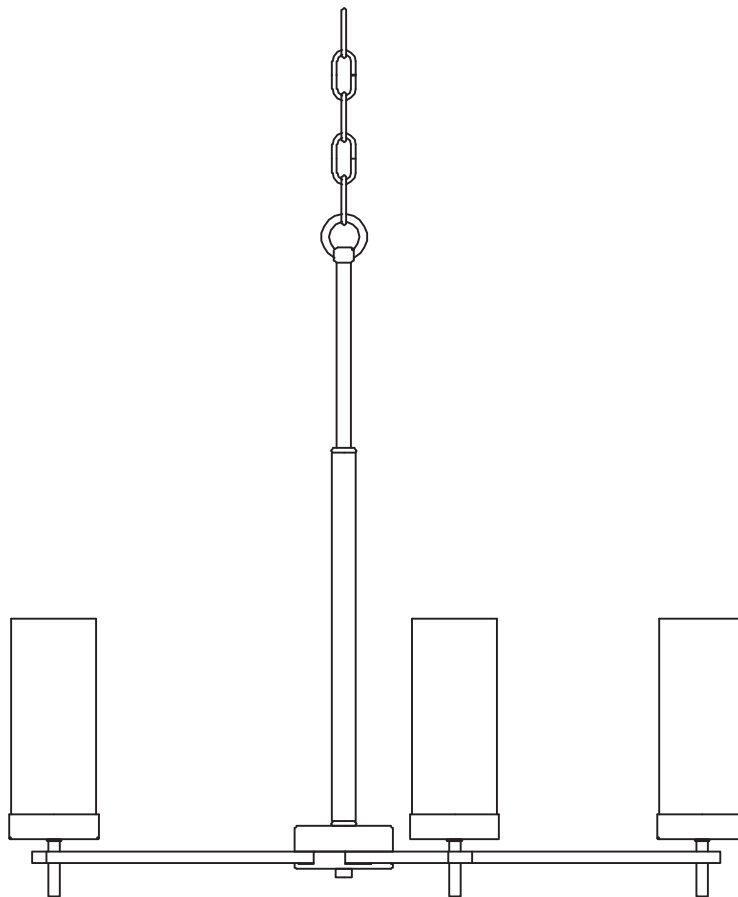

**SAVE THESE INSTRUCTIONS!**

# Install the Fixture

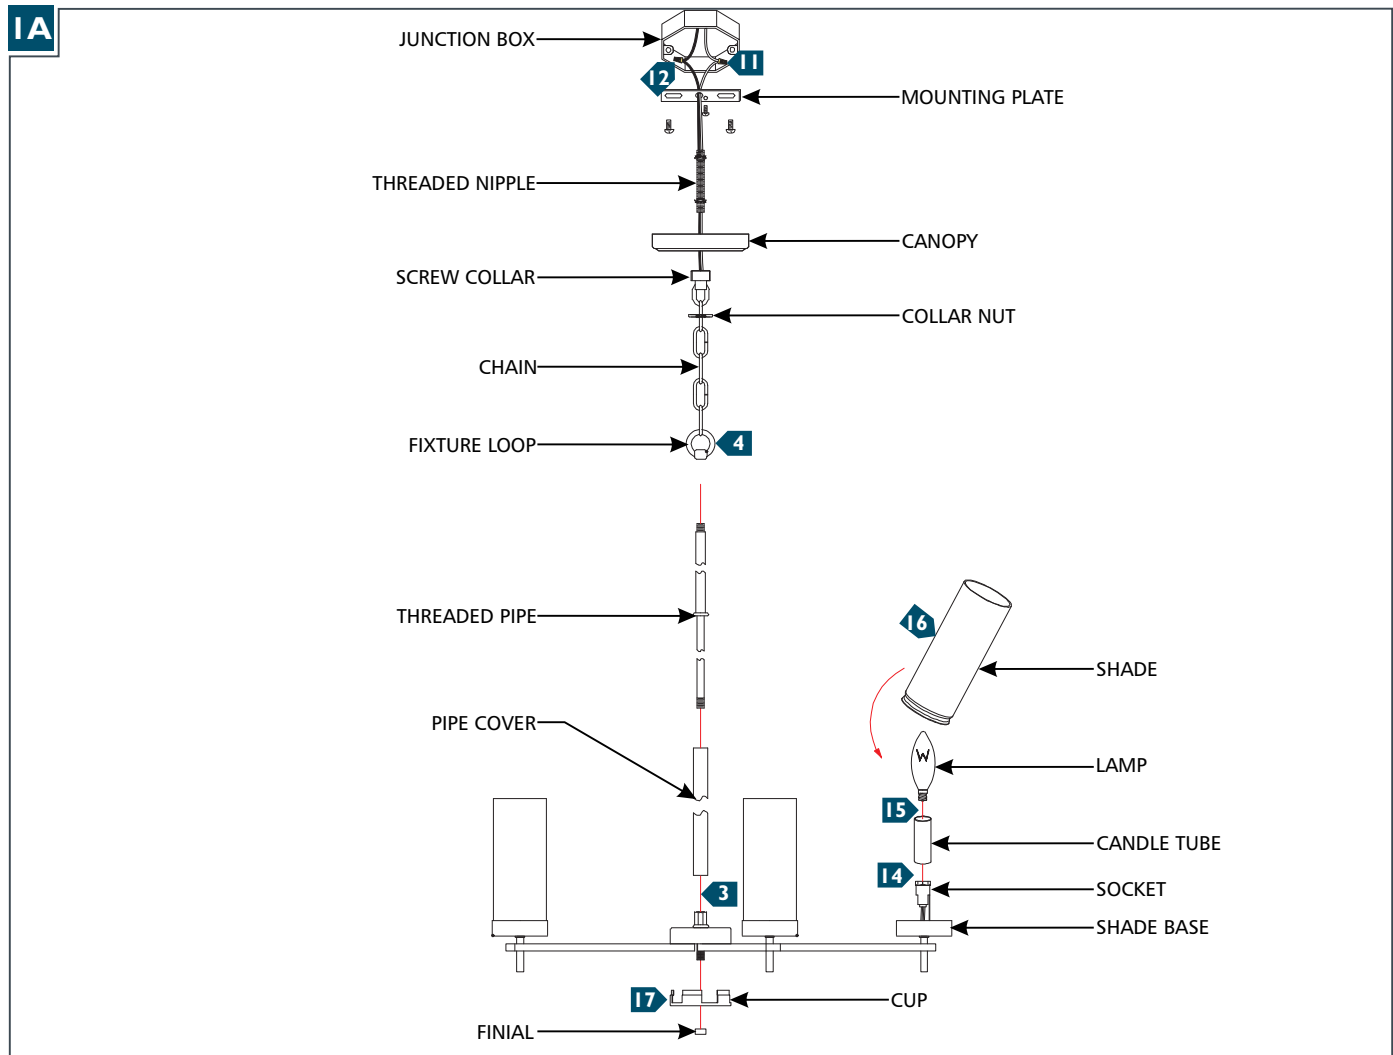

- 1** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Insert the threaded pipe into the pipe cover, then feed fixture wires through the pipe and screw it onto the top of the fixture.
- 4** Feed the fixture wires through the fixture loop and screw it onto the threaded pipe.
- 5** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 6** Open the chain link with pliers and install the chain on the fixture loop, then re-close the chain link.
- 7** Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
- 8** Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture, re-close the link with pliers.
- 9** Weave the cord through the chain, collar nut, canopy, screw collar, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the junction box, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- 14** Install the candle tubes by sliding them over the sockets.
- 15** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 16** Place the shade over the socket and into the shade base ensuring that it is secured by the spring clips inside the base. Repeat for remaining shades.
- 17** Install the cup to the bottom of the fixture and secure it in place using the finial.