

INSTALLATION INSTRUCTIONS

Model # 8991


READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)


1. Shut off power at the circuit breaker (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Align strap (B) to the outlet box (A) and mark the location of the wall anchors (I). Insert the wall anchors.
4. Thread nipple (C) into the center of strap (B) and thread studs (H) into the top of strap (B) spaced the same distance apart as the holes in the back plate (K).
5. Attach strap (B) to the outlet box (A) using mounting screws (D) (Part#8/32"*1"L). Screw the wood screws (G) into the anchor (I) (Fig 1).

Fig. 1

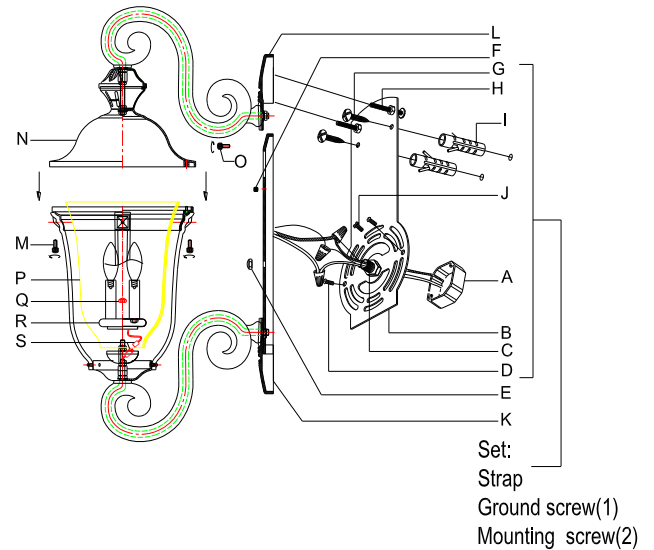


CONNECTION THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the long strap using the green screw (J) (Part#8/32"*1/3"L) provided.

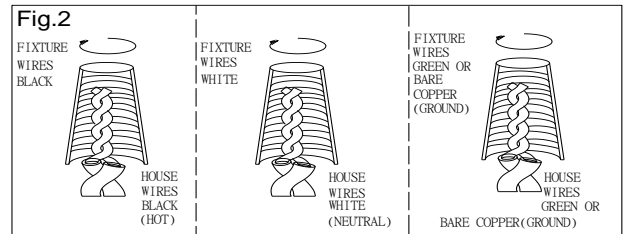

FINISHING THE INSTALLATION (Fig.1)

7. Align back plate (K) onto nipple (C) and studs (H) and secure with cap nuts (E,F). (Fig 1)
8. To prevent moisture from entering the outlet box (A) and causing a short, use clear silicone sealant to outline the outside of fixture back plate (K) where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig 3)
9. At this point, unscrew the screws (M&O) and remove the top cover (N) with the top back plate (L) to install 2X60W/E12 bulbs (no bulb included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NOTE: NO BULB INCLUDED) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. If you need to replace the glass shade (P), unscrew screws (M&O). Remove the top cover (N) with the top back plate (L). Raise the cluster cover (R). Unplug the male and female jacket (S) and remove cluster cover (R). Replace the glass shade (P). Plug the male and female jacket(S). Replace cluster cover (R). Install 2X60W/E12 bulbs (no bulb included) in accordance with the fixture specification —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
11. Replace top cover (N) and top back plate (L) and secure with screws (M&O).

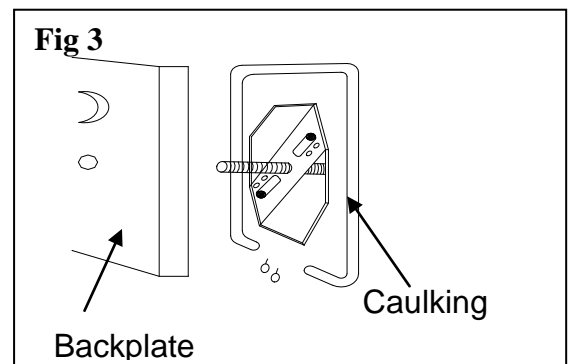

U.S. Patents: D454,654 ; D455,515; D455,856
This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.
© Minka Lighting Inc.

Your installation is now complete. Return power to the outlet box and test the fixture.