




# Custom Flex Clamp Mount with Security Holder for Otterbox uniVERSE and Defender Series Cases

OTT-CFDCM


INSTRUCTION - MANUAL

## CONTENTS:

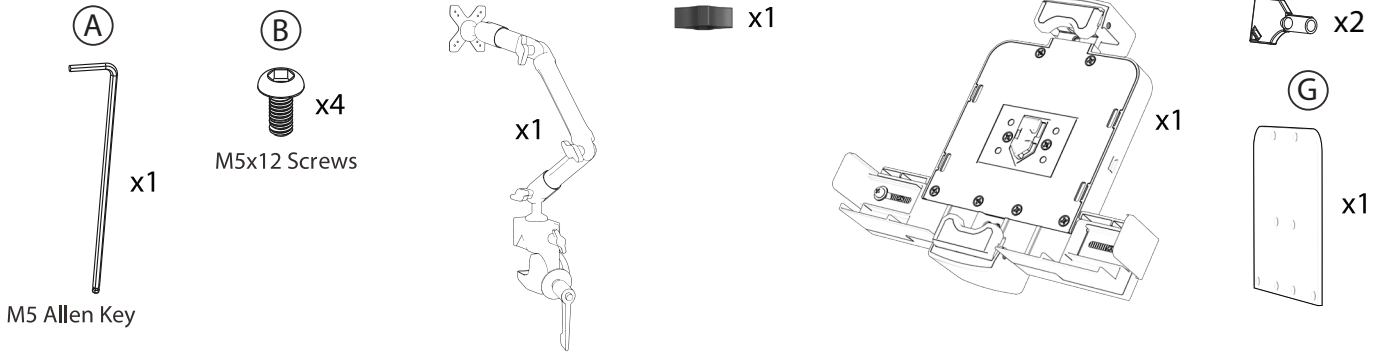


## INSTALLATION:

### 1. Attaching Clamp Mount to Holder

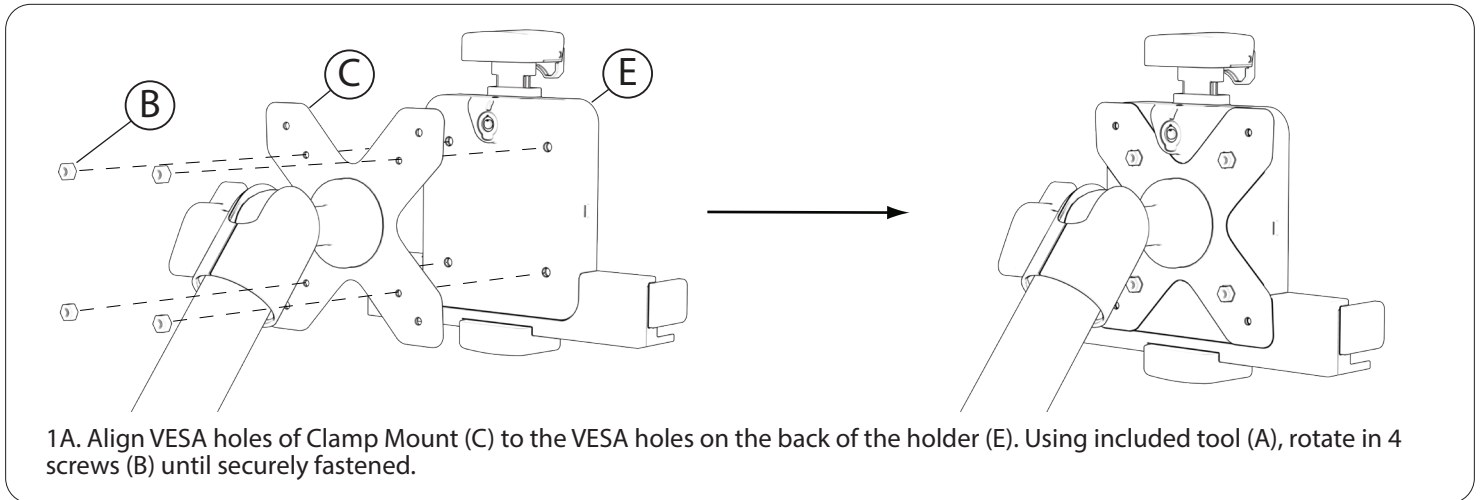


### 2. Adjusting Any Ball Joint


**CAUTION! PLEASE READ BEFORE USE!** \*Disclaimer - Ball Joint Warning

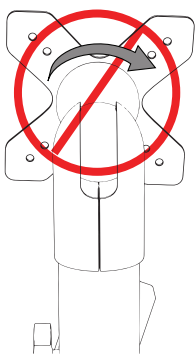

Don't attempt to adjust, tilt, or rotate any ball socket joints while it is fully tightened. Any such action will result in possible damage and loss of integrity of product functioning at full capacity. Manufacturer will not be responsible for any such actions by any person.




**CAUTION:** When adjusting the knob to control the positioning of the mount, you **MUST** loosen the knob before adjusting. If pressure is forced on the mount to move direction without loosening knob, damage could occur on the ball head.




**CAUTION:** When changing the position of the holder, you **MUST** loosen the knob before moving. If the knob is fully tightened during the movement of the holder, the coupler could break and mount could become damaged.


### 3. Inserting Tablet into Holder

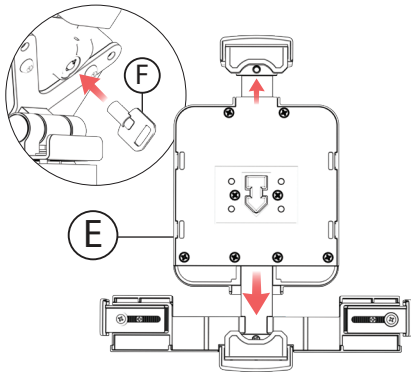


3A. First, make sure the holder is in unlocked position. Insert key (F) to unlock as needed. Using your hands, extend the holder in the Y-direction.

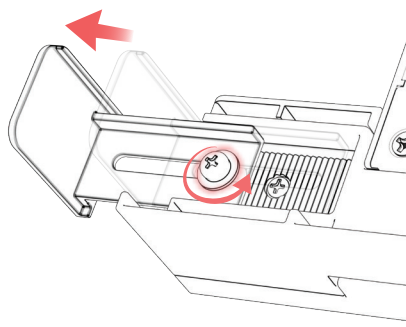


3B. Locate the X-direction holder arms. Using a screw driver (not included), rotate until loosened, then extend arms outwards.

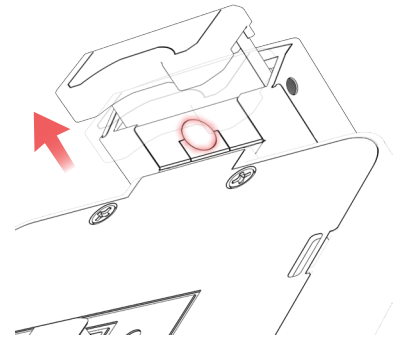

3C. Locate the Z-direction grip arms. On the inside for both the top and bottom, there is a circular button. Press down to loosen the grip arms and extend outwards.




\*\* Tablet and case not included. Shown for example purposes only.

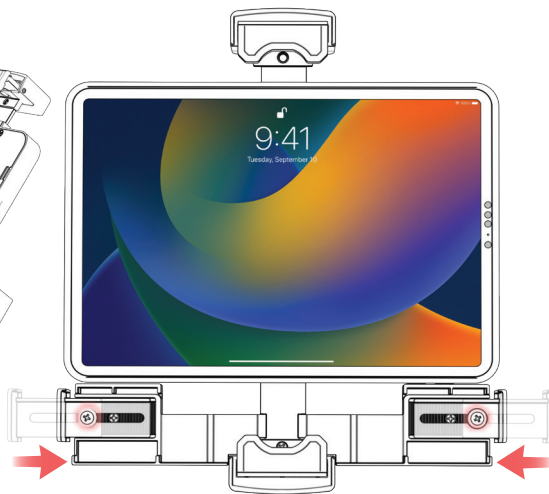

3D. Insert a tablet with compatible case attached. Make sure the two adapters are aligned. Once you insert the tablet with case, it will slide down to let you know it is in the right location. Then, retract the X-direction arms to find the right distance. Remove tablet and use screwdriver to tighten the desired position.


\*\* Tablet and case not included. Shown for example purposes only.

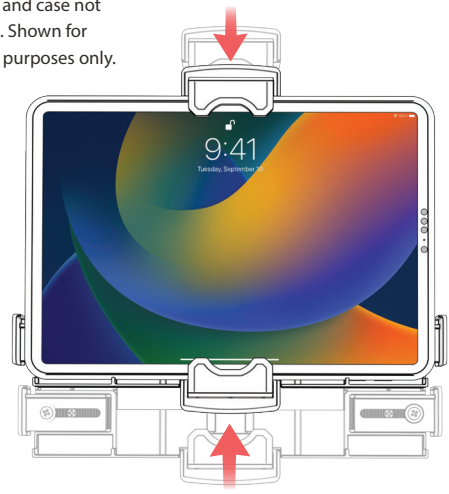


3E. Re-insert the tablet with compatible case. Using your arms, retract the holder in the Y-direction and Z direction until securely fitted.

### 4. Installing Custom Flex Security Desk Clamp Mount

#### DESK OPTION

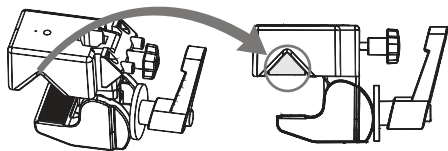


4A. Put the attached plastic insert on the side into the clamp.

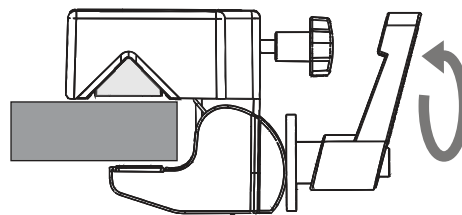


4B. Clip on the clamp to the desk then twist the lever clockwise to tighten it securely.

#### POLE OPTION




4C. Clip on the clamp to the Pole.

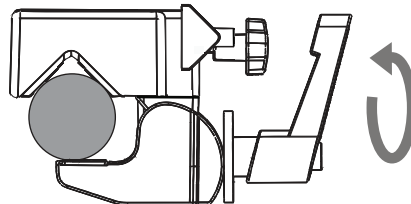

4D. Twist the lever clockwise to tighten it securely.


### 5. Adjusting the Flex Arm



5A. Twist the SCREW KNOB of the arms anticlockwise to release the connection. Adjust the arms to your desired position and then tighten the screw knob clockwise.

## 6. When Attaching the Cable Bands

6A. Take all the cable bands (D) and stretch them open to fit around the body of the clamp mount (C).

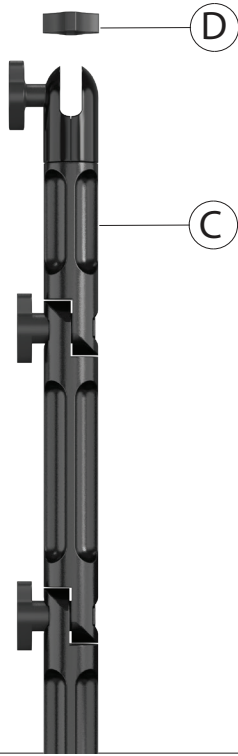


6B. Repeat the process until all the cable bands are evenly distributed onto the body of the flex mount as illustrated.




## 7. When Setting Up the Cable with the Bands

7A. Take your cable (not included) and route it alongside the body of the flex mount as neatly and tight as you can. Go through each of the cable bands so it is attached cleanly and snug to the flex mount as illustrated.

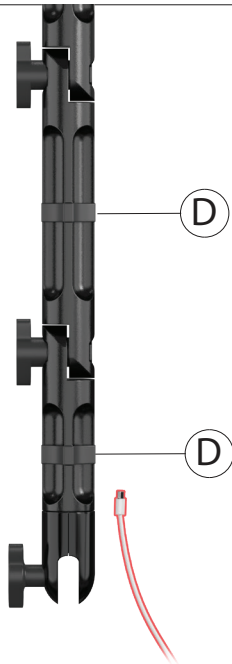

## 8. Changing Holder Frontplate (OPTIONAL)

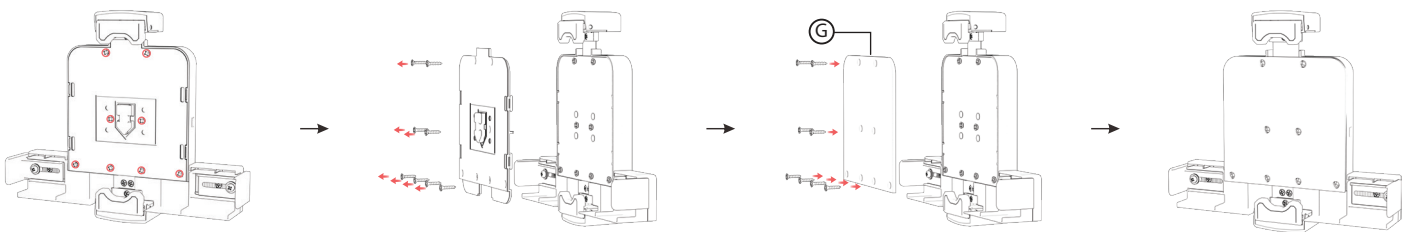

8A. Remove (8) front screws using a screwdriver (not included) as shown above. Replace front plate with component (G) and rotate in screw until securely tightened.