

RGB WHITE

COLOUR	CODE
RGBW	BL-LS-3004-RGBW-IP65

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE


LED WATTS	22W/m 16W/m (RGB) 6W/m (white)
INPUT VOLTS	24V DC constant voltage
OPERATING TEMP.	-20°C ~ +60°C
MAX. RUN PER POWER FEED	5 metres
COLOUR TEMPERATURE	3000K (white chip only)
CRI	≥80 (white chip only)
LUMENS	R 136lm/m G 360lm/m B 95lm/m W 423lm/m
BEAM ANGLE	120°
SOURCE LIFE	50,000 hours
WARRANTY	3 years
MOUNTING	3M adhesive backing A Bright Light approved aluminium profile is required for thermal management & environmental protection
INGRESS PROTECTION	IP65 achieved with silicone spray (can also be used indoors)
CONTROL	Requires 4-channel controller

NOTE FOR DIMMING/CONTROL OF RGB & WHITE STRIP

*This product requires a controller with 4 channels, it uses a common positive and all colours are controlled by PWM on the negative side.

Requires 5-core cable for all installations, cable diameter will depend on distance & amps required by the LED strip.

ALWAYS UNCOIL BEFORE USE

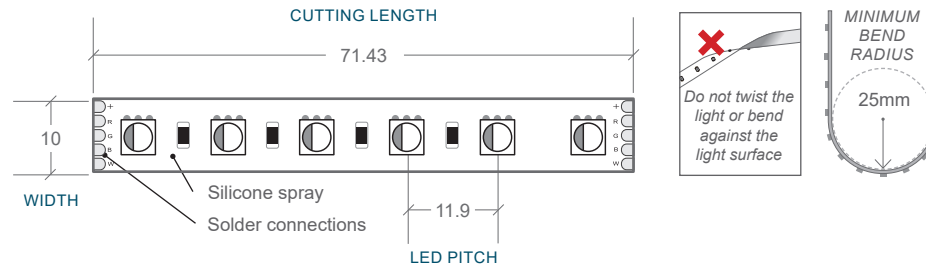


IP65 WATER-RESISTANT

With an IP65 rating, LED ribbon strip can be used in an outside setting and is water-resistant, but is not waterproof and is not suitable to be submerged. Please consider outdoor usage carefully and ensure adequate drainage.

To ensure the IP65 rating, silicone needs to be applied to all LED Ribbon Strip ends / joins.


4-CHANNEL CONTROLLER WITH RGB & WHITE STRIP & POWER SUPPLY

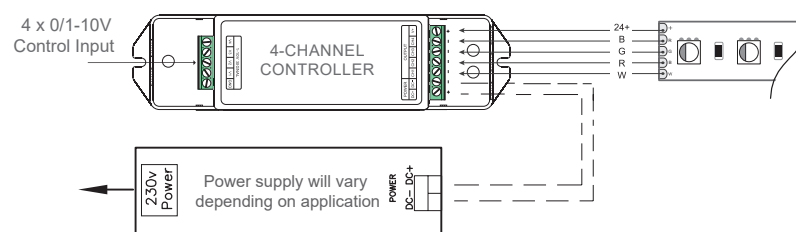

CUT

Cut LED ribbon strip at the cut marks outlined only.

Silicone needs to be applied to all ends to ensure the LED ribbon strip remains water-resistant.



CABLE CONNECTION





To add a cable connection, cut and trim the wires to the appropriate length required. Carefully remove the silicone spray from ends of the LED ribbon strip to be connected (can be scratched off). Solder the wires to the soldering pads at the end of the LED ribbon strip ensuring the correct +24V, R, G, B, W polarity to form a continuous electrical circuit. Reapply silicone.

END TO END CONNECTION

To connect one length of ribbon strip to another, carefully remove the silicone spray from end of the LED ribbon strips (can be scratched off). Align LED ribbon strips end to end matching the correct +24V, R, G, B, W polarity between both lengths. Heat and solder the two lengths of ribbon together, using the soldering pads on both strips to form a continuous electrical circuit. Reapply silicone.

CORNER CONNECTION

To provide a corner connection, cut and trim the wires to the appropriate length for the corner. Carefully remove the silicone spray from ends of the LED ribbon strip to be connected (can be scratched off). Solder the wires to the soldering pads at end of the LED ribbon strip and to the beginning of the new ribbon strip ensuring the correct +24V, R, G, B, W polarity to form a continuous electrical circuit. Reapply silicone.

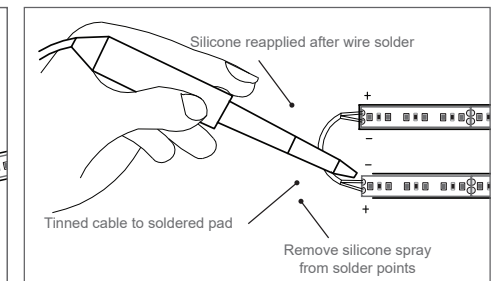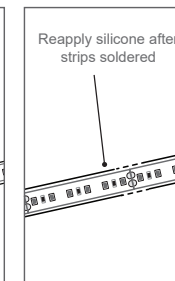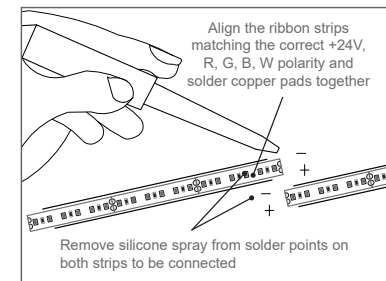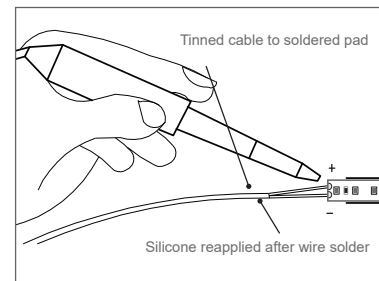

Please note drawings are an installation guide only. Each LED Ribbon Strip application may have variable factors. Cable size may need to be specified to limit the voltage drop throughout the circuit.