

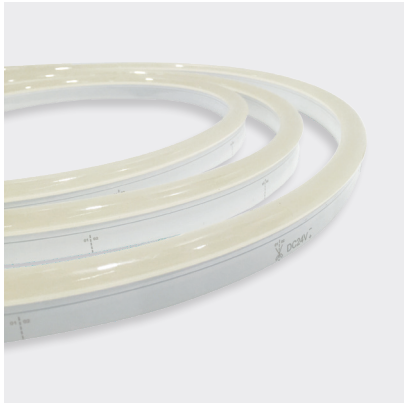



## NEON MICRO CLASSIC | ELECTRICAL AND PHYSICAL INSTALLATION GUIDE




COLOUR	CODE
WARM WHITE 3000K +/- 175K	BL-LS-4550-30
NATURAL WHITE 4000K +/- 275K	BL-LS-4550-40
COOL WHITE 5700K +/- 300K	BL-LS-4550-57

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE  
IES FILES AVAILABLE




### BENDING PARAMETERS


✓ NEON MICRO CLASSIC CAN BE CURVED AS SHOWN BELOW

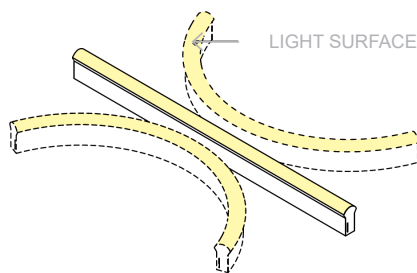


✗ DO NOT TWIST THE LIGHT OR BEND AGAINST THE LIGHT SURFACE

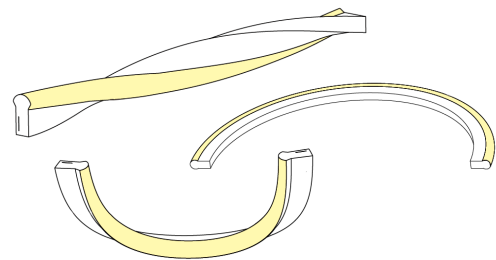

- Avoid bending LED Neon within the first unit (units are clearly marked with dashed lines on the sides of the product)

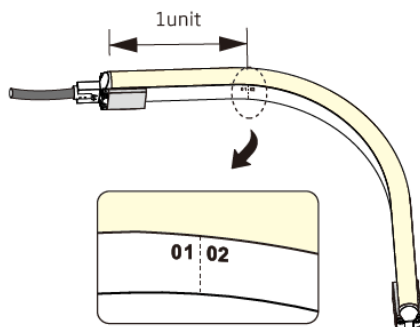


- LED Neon can be bent up to the defined "minimum bend radius" (60mm for Neon Micro Classic)

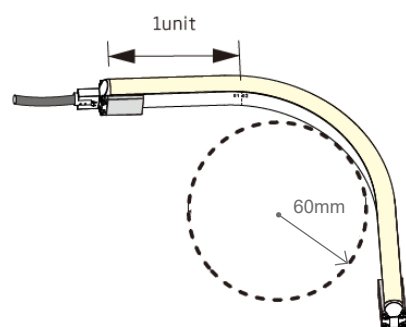

## NEON MICRO CLASSIC | ELECTRICAL AND PHYSICAL INSTALLATION GUIDE


### WIRING DIAGRAM

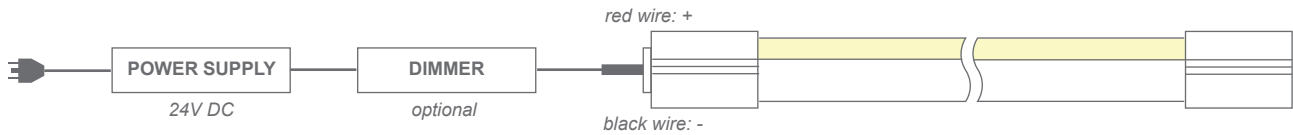


- LED Neon must always be used in conjunction with a certified Bright Light 24V DC power supply.
- Check the polarity of the connector before inserting the front connector and switching on the mains power.
- To minimise voltage drop and ensure consistent light output, position the power supply near to the power feed end of the LED Neon, and keep the line as short as possible
- Ensure your maximum run per power feed adheres to the guidelines; 15m when using a single connector, or 30m when using both connectors (*see specification sheet*).
- Ensure to add 20% buffer when selecting a power supply.
- Before making any cuts, installation, maintenance, or connection, be sure the mains power is disconnected.
- If essential; cut and connect LED Neon correctly. Any incorrect operation can cause damage.
- All connector joints must be connected correctly to achieve connector IP rating.

### PROFILE INSTALLATION REQUIREMENTS

- ✔ - Ensure the supply cord is not subject to mechanical stress
- Keep 10–20mm distance between the end of the profile and the end mounting piece

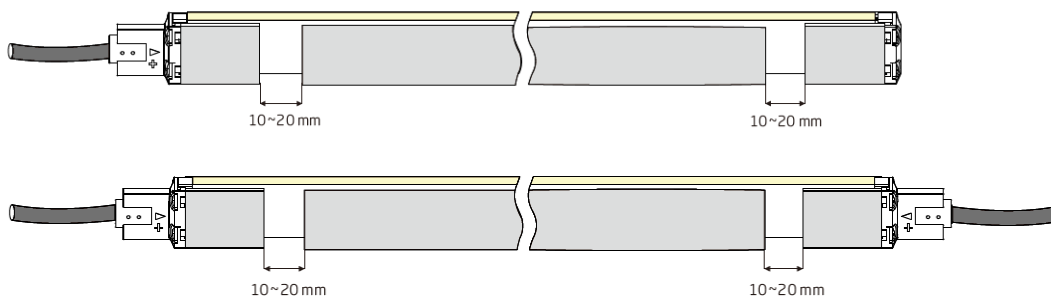


- The bend angle should be less than 15 degrees when installing LED Neon into the profile by hand

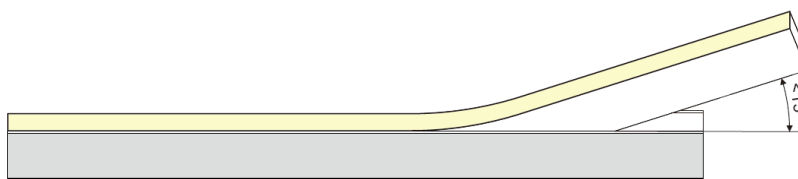


## NEON MICRO CLASSIC | ELECTRICAL AND PHYSICAL INSTALLATION GUIDE

- ❌ – Avoid placing mechanical stress on the front connector cable
- Do not curl or bend the front connector cable with excessive force

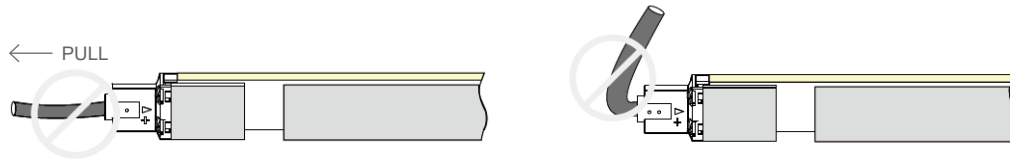

- Avoid installing the profile less than 10mm from the end mounting piece

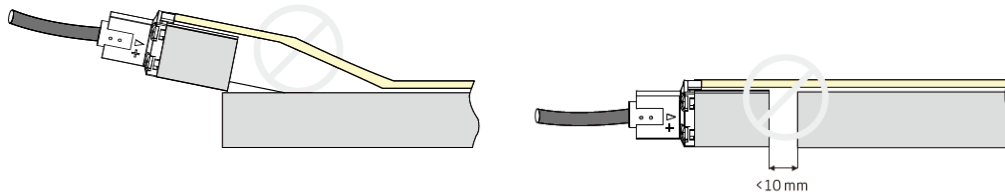

- Install the LED Neon into the profile in one direction, don't let it bow in the middle

