



PENDANT

GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product can be dimmed with most ELV and TRIAC dimmers.

This instruction shows a typical installation.



CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

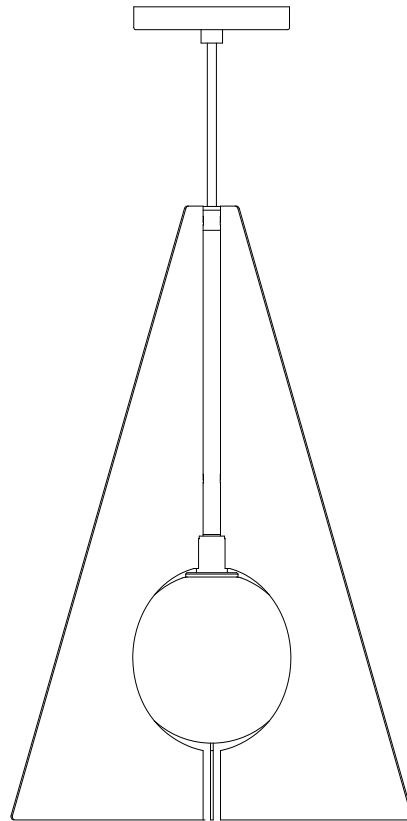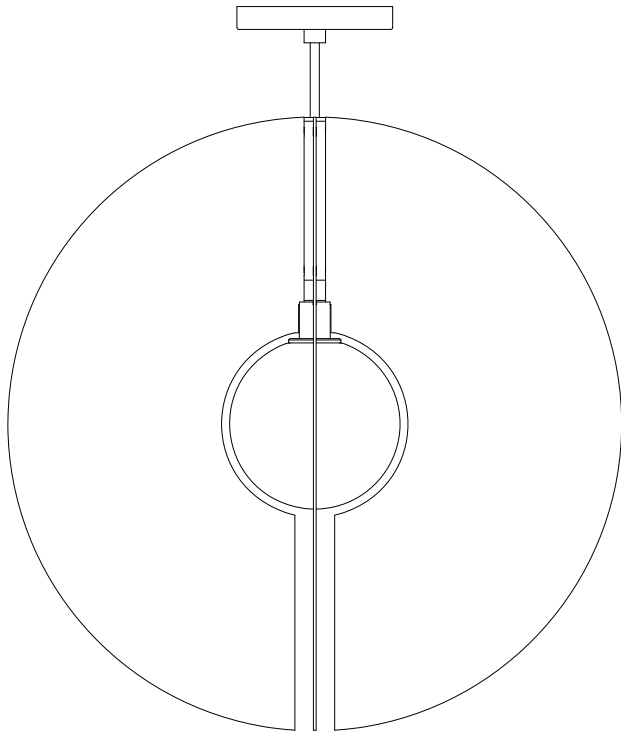

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com

Install the Fixture

1A

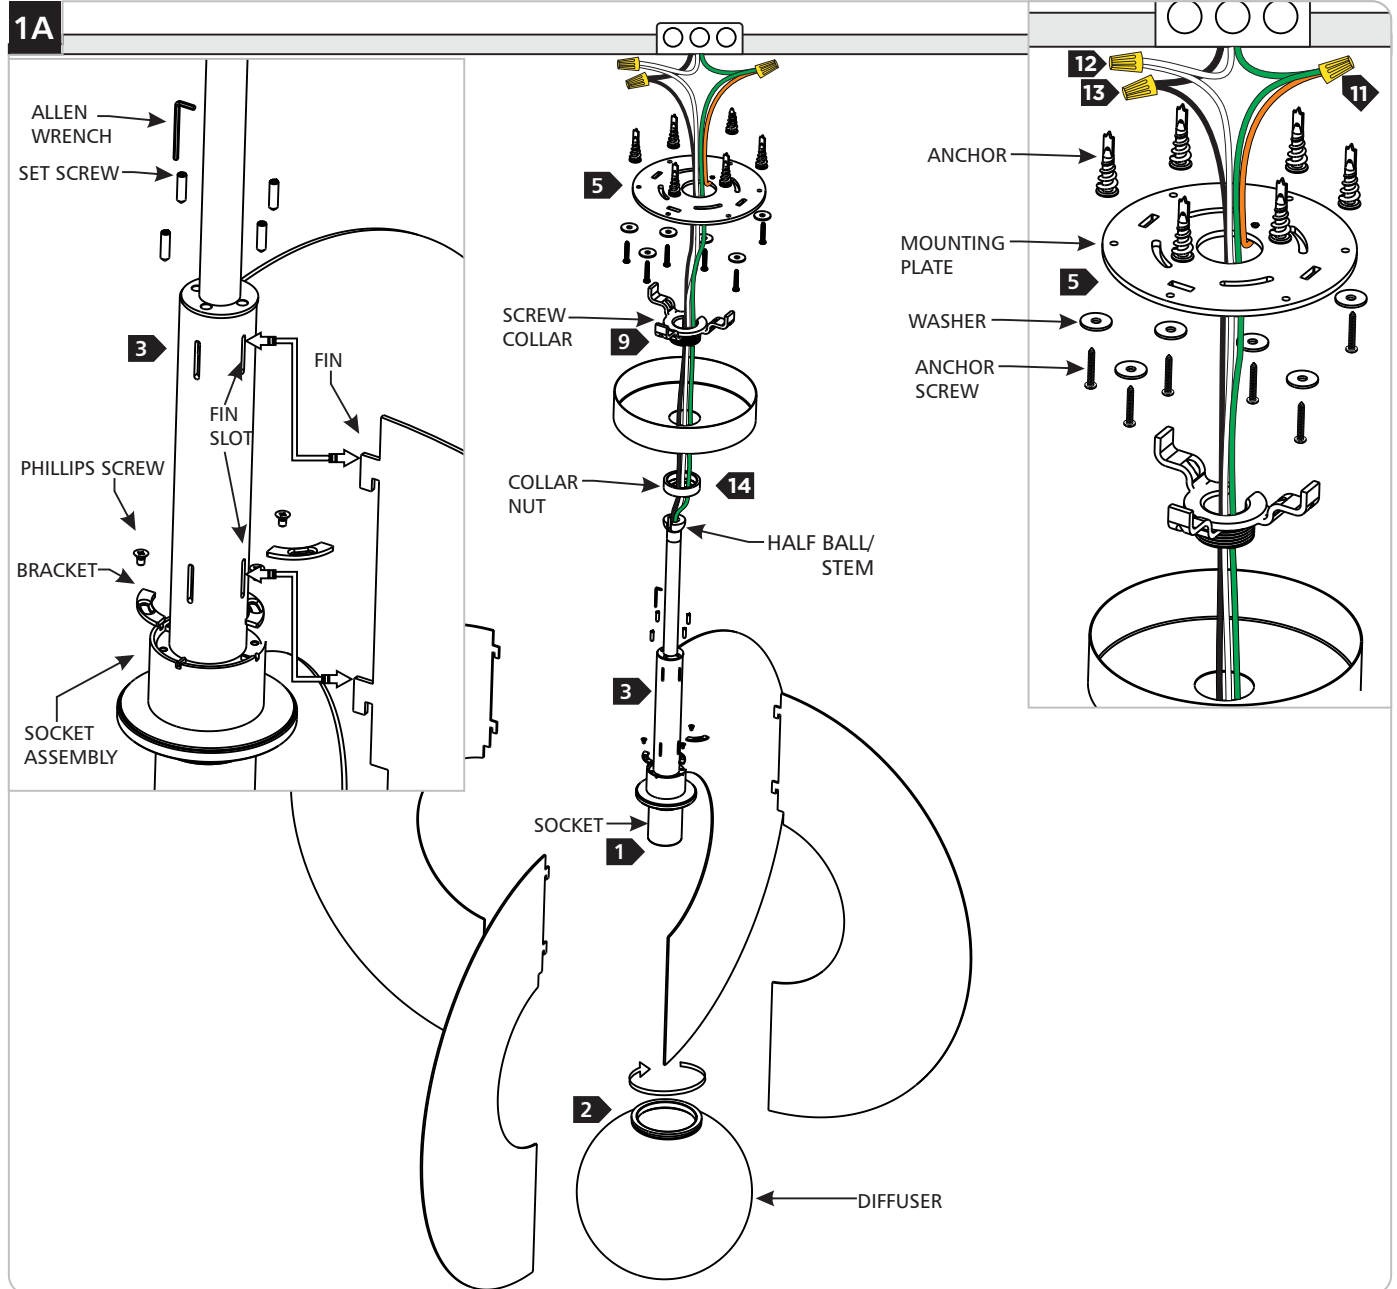

- 1 Install the lamp by inserting it into the socket. Refer to the label on the socket for Max Wattage Information.
- 2 Install the diffuser by screwing it over the socket. Make sure the diffuser is secure before releasing. Do not over tighten.
- 3 Install each fin by inserting the hooks into the slots on the socket assembly, then sliding downward. Tighten the set screws at the top of the socket assembly, install the brackets and secure them with the Phillips screw at the bottom of the socket assembly to secure the fins in place.
- 4 Remove the mounting plate and driver from the canopy..
- 5 Secure the mounting plate to the junction box with the provided #8-32 screws. Warning: if the outlet box is not listed to support the luminaire's weight, it must be supported by an independent structure.
- 6 Determine the desired height of the fixture using the provided stems and half ball/upper stem and assemble them by screwing them together.
- 7 Slide the collar nut over the half ball/stem assembly.
- 8 Feed the fixture wires through the stem assembly, then screw the stem assembly to the top of the fixture.
- 9 Feed the fixture wires and half ball/stem assembly through the canopy, then seat the half ball into the screw collar.(Make sure to avoid pinching the wires.)
- 11 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 12 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 13 Connect the black fixture wire to the hot power line wire with a wire nut.
- 14 Neatly place the wires and wire nut connections inside the canopy, align the screw collar to the slots in the mounting plate, slide the canopy up to over the mounting bracket and secure in place with the collar nut.
- 15 Replacing the Lamp:
 - (a)While keeping the fixture as still as possible, carefully unscrew and remove the set screws and Phillips screws at the top and bottom of the socket assembly.
 - (b)Carefully remove the fins to gain access to the diffuser.
 - (c)Carefully unscrew and remove the diffuser.
 - (d)Remove the old lamp and replace with new one.
 - (e)Reinstall the diffuser and fins.