

### General Product information

This product is suitable for indoor dry and damp locations only.

#### IMPORTANT SAFETY INSTRUCTIONS

This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way.




If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.

#### Prepare the Shade Assembly

- 1 Place the shade assembly on a clean work surface. Slip the head arm up the clear cord until it is engaged onto the head attachment tube. Secure using the #8-32 x 1/4" machine screw included in the hardware kit.

#### Attach Legs to Body

- 2 Carefully lay the body onto a flat work surface on its front edge. Hang the body off of the surface so that the notch is accessible.
- 3 Make sure to pass the power cord from the shade assembly underneath the leg crossbar.
- 4 Secure the legs to the fixture as shown below using the included #10 panhead screws. The power cord should be captured in the groove on the rear of the wood body underneath the leg crossbar. Ensure that the legs are centered by sighting the fixture from the front.

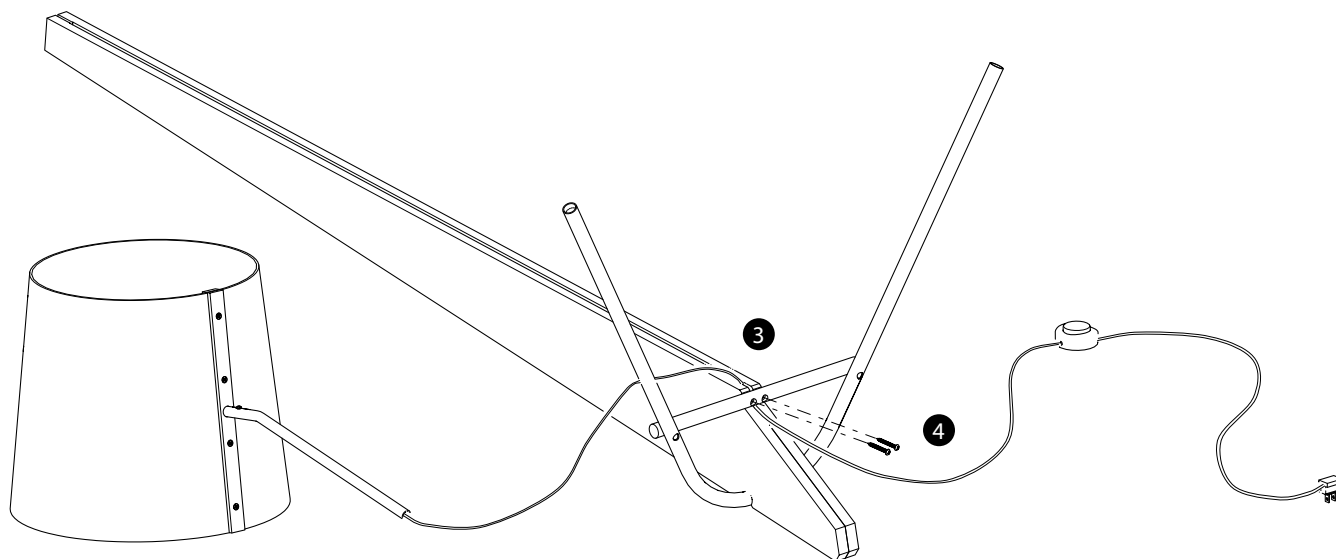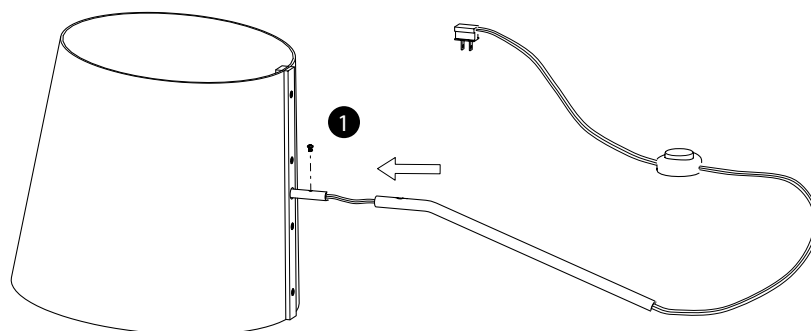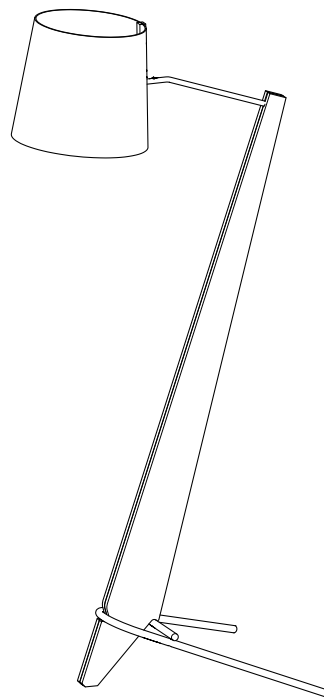

## Install the Shade Assembly

- 5 After the legs have been secured, stand the fixture upright.
- 6 Insert the head arm into the hole in the top of the wood body. Make sure to slip the power cord through the slit in the top of the wood body.

**CRITICAL:** Press head arm into hole until fully seated! Only partially engaging the head arm may cause damage to the wood body.

## Hiding the Power Cord

- 7 Pull slack out of power cord. All excess cord should slip under the leg crossbar.
- 8 Press the power cord into the groove that runs down the back of the wood body. Press cord in flat with a blunt instrument, taking care not to damage the plastic insulation.
- 9 Once the power cord is fully seated, press the included black cordstock into the groove to hide the power cord from sight. Start at the bottom and work your way to the top. Excess cordstock should be trimmed.
- 10 Install the included E26 base lightbulb. Plug in fixture.

If you choose to use your own E26 base bulb, do not exceed the 60 W maximum rating. We recommend an A19 shape.

