


# User Instructions

## USB Timer/Speed Controller

### Feng Studio



Below are the user instructions for assembling and operating this product. Some variations are to be expected between the provided images and the product on hand.

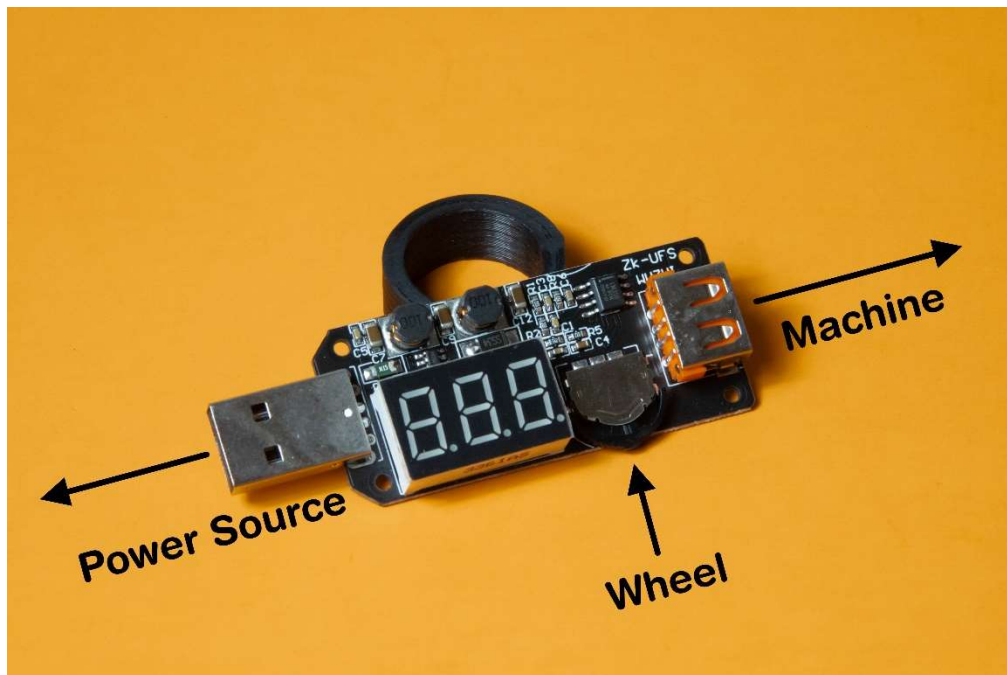

Plug the controller into a power source and the machine. The display will display the current output voltage

#### Speed Controlling:

- Rotate the wheel left/right to increase/decrease the output voltage.
- Recommended MAX is ~6.5v for 3x3. Voltage adjustment is NOT recommended for 4x4.
  - Press the wheel once to turn the output on/off

#### Timer:

Step 1: Long press the wheel for 3 seconds and release to enter the timer interface, "---" indicates that the timer function is off

Step 2: Rotate the wheel left/right to increase/decrease the time before auto shut-off. The time in minutes is displayed

Step 3: Long press the wheel for 3 seconds and release to exit the timer interface and to start the timer. Flashing decimals indicate the timer is working. Voltage can still be adjusted in this stage by rotating the wheel left/right

Step 4: Upon auto shut-off, "OFF" is displayed, press the wheel once to turn the output on again. Start over from step 1 if you wish to set another timer

- To stop the timer while it is running, simply unplug and reconnect the timer