



LTX-40



DEVICE

40 GHz Lightwave Transmitter Module for RFoF

OVERVIEW

The Optilab LTX-40 is a high performance Lightwave Transmitter Module designed for analog photonics applications from DC to 40 GHz. This unit includes a 32 GHz optical intensity modulator and an Automatic Bias Control (ABC) board with four different operating modes. The integrated Tunable Wavelength Laser makes it a versatile solution for RFoF system integration. The LTX-40 requires a single 12 Volt DC power supply for operation. Contact Optilab for more information.


FEATURES

- 30 GHz S21 bandwidth modulator
- 1527 nm to 1567 nm LD wavelength range
- Automatic Bias Control w/ 4 mode operation
- Internal TWL laser up to 40 mW
- Single 12V power supply required (not included)
- Customizable Options:
 - Low Drive Voltage
 - PM Output
 - High Extinction Ratio (>30 dB)

USE IN

- Analog photonics
- 40 GHz RFoF transmission
- RF/IF signal distribution
- Satellite communication
- Optical communications to 43 Gb/s
- Picosecond pulse generation

FUNCTIONAL DIAGRAM

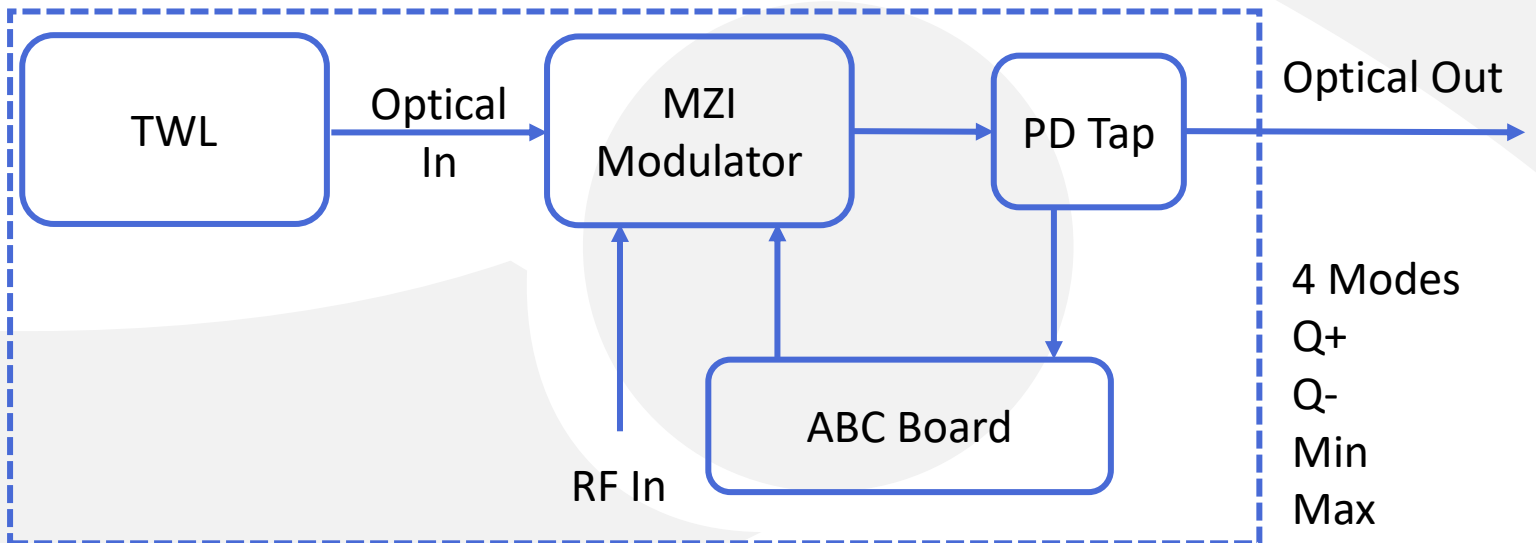



LTX-40

SPECIFICATIONS

Modulator Operating Wavelength	1520 nm to 1610 nm
Laser Source	Tunable Wavelength Laser, 1526 nm to 1567nm
Laser Power Level	Up to 40mW
RF Return Loss	>15 dB @ 10 GHz; >10 dB @ 30 GHz
Operating Frequency Range	DC to 40 GHz
Input RF Voltage	27 dBm max.

GENERAL

Optical Output Level	6.5 dBm typ. w/ 20 mW DFB
S21 Bandwidth	3 dB, 30 GHz typ.
Modulator Bias Mode	4 Automatic bias control modes, selectable by software
Extinction Ratio	25 dB typ., >30 dB (HE version)
Modulator Voltage	6.4 V typ. @ 10 GHz; 8.3 V type. @ 30 kHz; 2.5 V typ. @ 10 GHz, 4.3 V typ. @ 30 GHz (LD version)

Operating Temperature (standard)	-30°C to +60°C
Storage Temperature	-60°C to +90°C
Power Supply Requirements	+ 12 V DC, 1 A typ.
Optical Connectors	FC/APC
Fiber Type	SMF-28 output, PANDA output (PM version)
RF Input Connector	GPPD or V connector
Power Connector	DB-15
Remote Control	RS-232, DB-15
Alarm	LED bias mode status
Dimensions	220mm x 119mm x 27mm

MECHANICAL

ANALOG LINK PERFORMANCE

IIP3 @ 7 GHz	29 dBm typ.; 25 dBm typ. (LD version)
1 dB Compression Point @ 10 GHz	16 dBm typ.; 8 dBm typ. (LD version)

BIAS CONTROL MODE



Q+	Set to quadrature point of positive slope for linear analog modulation
Q-	Set to quadrature point of negative slope for linear analog modulation
Min	Set to min. point of operation for pulse generation of digital modulation
Max	Set to max. point of operation for pulse generation of digital modulation





LTX-40

TYPICAL S21 AND S11 BANDWIDTH

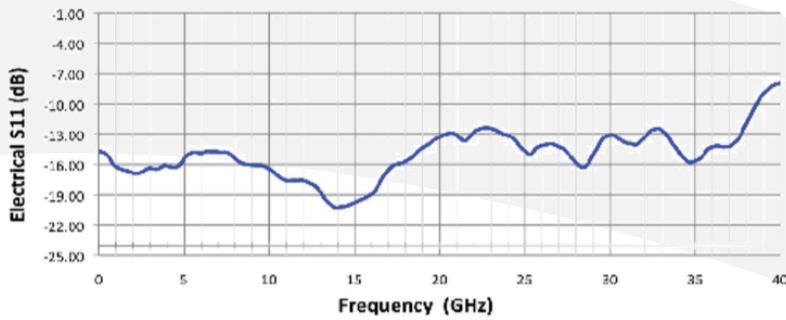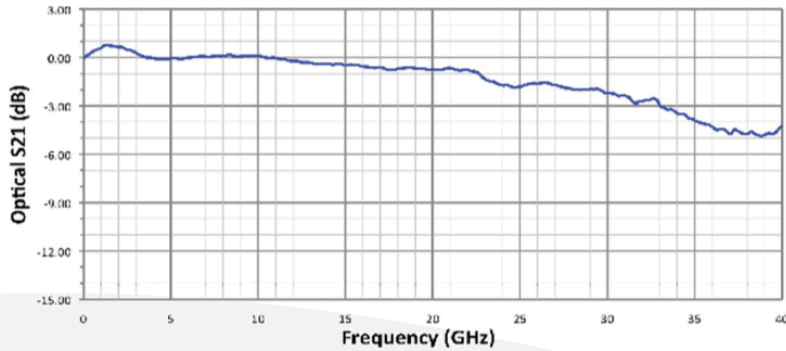


OPTIONS

LTX-40-XX

- PM: Polarization Maintaining
- LD: Low Drive Voltage
- HE: High Extinction Ratio

BIAS SETTING MODES FOR LTX





Based on sophisticated phase measurement of this small dither signal, LTX-40 provides four selectable operating modes: quadrature (Quad +), inverted quadrature (Quad -), minimum (Min), or maximum (Max) points.

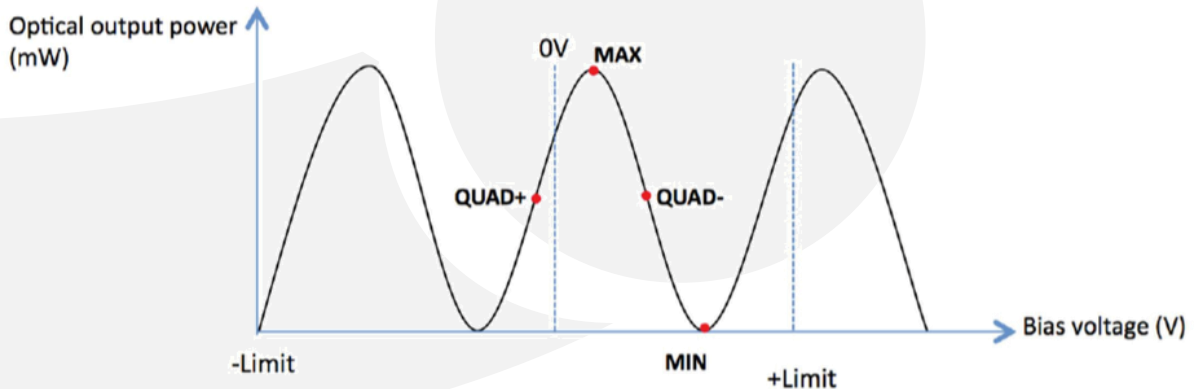




LTX-40

MECHANICAL DRAWING

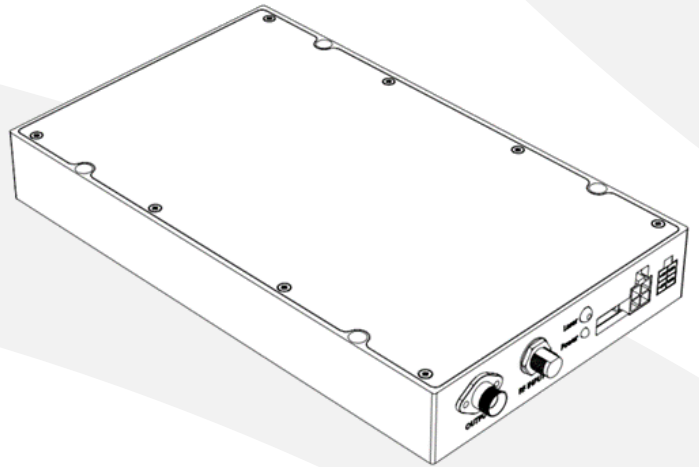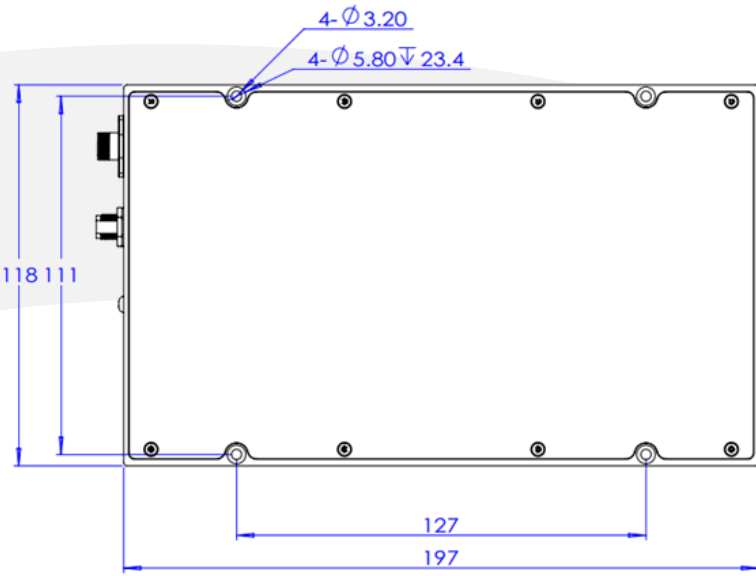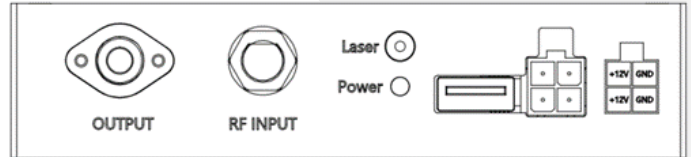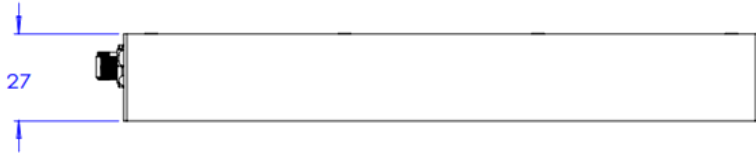

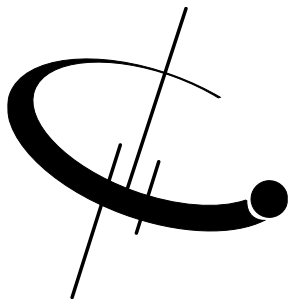

LTX-40

PRECISION POWER SUPPLY FOR LTX (OPTIONAL)

FRONT



BACK



General Specifications	
Parameters	Specifications
Input AC Voltage (VAC)	85-240
Input AC Current (A)	≤0.5
Input AC Frequency (HZ)	50-60
Transfer Efficiency	≤85%
DC Output Current (A)	4 A max.
DC Output Voltage (V)	±5 V
DC Voltage Ripple	≤2%
DC Connectors	Molex 4 Pin
Communication Connectors	DB-9 and USB 2.0
Dimensions (mm)	153x115x33

TYPICAL S21 AND S11 BANDWIDTH FOR LD VERSION

