

# DG800+



## Combined Proximity and Keypad Access

- Operating voltage 12Vdc
- Die-cast Aluminium
- Bluetooth
- Backlit keypad
- Weather resistant - IP65
- Vandal resistant
- 2 LED displays with audible indication



WEATHER  
RESISTANT  
- IP 65 -



VANDAL  
RESISTANT



BLUETOOTH



### OPTIONS

STD-PC



STD-PCPS



KT-10



KT-10BC




KT-15EM



KT-16



621-11

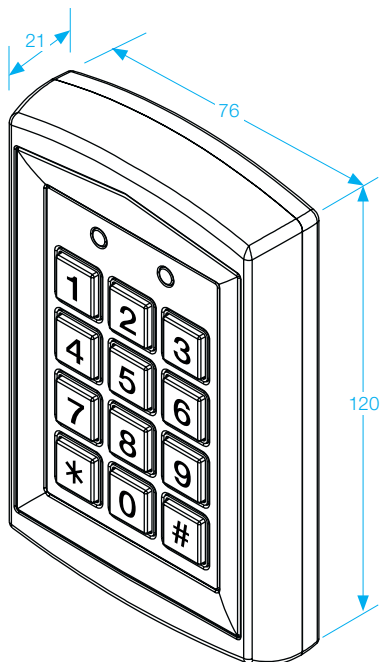

### SPECIFICATION

- Current draw: Pull in: 100mA/12Vdc; Holding: 70mA/12Vdc. Pull in: 50mA/24Vdc; Holding: 35mA/24Vdc.
- Input: Request-to-Exit, time out reed switch contact.
- Output: N.O./N.C/Com.
- Relays rating: 2A MAX@30Vdc., 0.6A@120Vac.
- Programmable 4 digit code.
- RF frequency: EM 125 KHz.
- Relay strike time: 01~99 seconds or toggle mode (00).
- Read range: 5cm. (In noise-free environment).