

DEVICE

Semiconductor Optical Amplifier, 1450-1600 nm

OVERVIEW

The Optilab SOA-1550-M is a semiconductor optical amplifier with high fiber-to-fiber gain, designed to be used in general applications to increase optical launch power to compensate for loss of other optical devices. The SOA-1550-M can be ordered with Single Mode (SM) with this particular SOA module having broadband amplification from 1450 nm to 1600 nm wavelengths, in a compact OEM module form factor based upon MSA requirements. This module version is an ideal building block for system integrators, especially in optical communication networks and HFC applications. It requires only a single +5 V power supply with low power consumption, with a full software control and monitoring via RS232 serial communication protocol.

FEATURES


- Wideband 1450 nm 1600 nm amplification
- High fiber-to-fiber gain 20 dB
- Compact OEM design for MSA form factor
- Up to 16 dBm output

USE IN

- Booster and in-line amplification
- Optical network

- General purpose test and measurement
- Fiber sensing

FUNCTION DIAGRAM

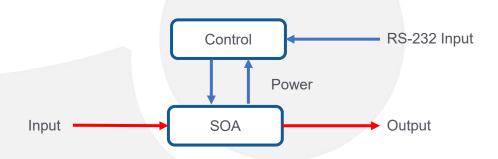





SOA-1550-M

Operating Wavelength

SPECIFICATIONS

01 2011 1071110111

GENERAL

Saturated Output Power @ -3 dB input +16 dBm typ.
Input Power -25 ~ +5 dBm

Fiber-to-fiber Gain

Up to 20 dB @ small signal input

Noise Figure

7 dB typ.

1450 nm to 1600 nm

Noise Figure 7 dB typ.

Gain Ripple 0.3 dB typ.

Input Optical Return Loss -55 dB typ.

Input/Output Isolation

30 dB min. (w/ isolator option)

Polarization Dependent Gain (PDG)

Polarization Extinction Ratio (PM type)

20 dB typ.

Power Stability ± 0.1 dB over 8 hours

Output Current Control 10% to 100% operating current

MECHANICAL

Operating Temperature

Storage Temperature

Operating Humidity

Operating Humidity

Oberating Humidity

SMF-28 Input, SMF-28 Output

Connector (Power and Control)

Controls/Monitoring

Octo +50 °C

Lo +70 °C

SMF-28 Input, SMF-28 Output

SMF-28 Input, SMF-28 Output

Connector (Power and Control)

Octo +50 °C

Lo +70 °C

SMF-28 Input, SMF-28 Output

Connector (Power and Control)

Octo +50 °C

SMF-28 Input, SMF-28 Output

Connector (Power and Control)

Input/Output Monitor, Current Control via RS-232


Controls/Monitoring Input/Dutput Monitor, Current Control via RS-232

Alarms Dverheat Warning

Power Supply 5 V DC

Dimensions 90 mmx 70 mm x 19.7 mm

MECHANICAL DRAWING

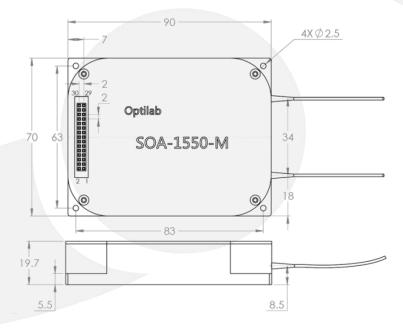





ACCESSORIES







5V Power Adapter (Included)

30 PIN Cable (Included)

Adapter Box (Included)

