



# poldina L

Rechargeable floor lamp

Ø 16,5 cm  
Ø 6,5 in




17 x 17 cm  
6,6 x 6,6 in

**LD0390B3** white  
**LD0390N3** dark grey  
**LD0390R3** corten

### LED DIMMER

4,5W LED • 370-400lm  
**2700-3000K** • IP54 • 100-240V  
50-60Hz • CRI>80 • 5Vdc max 1A  
17 x 17 x h 122 cm / 6,7" x 6,7" x h 48"

### INCLUDED



Single-contact  
charging station

### NOT INCLUDED




**LD0340RA**  
Multi-socket USB  
charger (8xUSB)



**BAT04701906701900**  
Replacement battery pack



**KIT00012009000200**  
Replacement LED board



This product contains a class F light source

### 1. Tips for use:

This product is exclusively for lighting purposes and:

A) It must not be exposed to heavy mechanical loads or contamination; B) It can be installed and used only after checking the state of the product; check that is not dirty and has not been damaged during storage; C) Installation and maintenance must be carried out when the appliance is switched off; D) Any alterations to the product, any tampering and any failure to comply with the instructions provided may make the appliance hazardous; When completely assembled (head + structure), the lamp has IP54 protection, which makes it ideal for outdoor use. The light fixture (head) alone has IP20 protection and is unsuitable for outdoor use on its own; F) All metal and plastic surfaces should be cleaned with a soft dry cloth; G) The company Zafferano shall not be held liable for any damage caused due to its products being assembled in any manner that does not comply with the instructions provided.

### 2. Technical data of the lamp:

- Power: 4,5 W
- Volt: DC 5 V
- Lumen lamp: 370-400 lm
- Lithium battery pack included (see section accessories included); for instructions about how to replace the battery pack, please consult the website: [www.zafferanoitalia.com](http://www.zafferanoitalia.com). Use only original batteries for replacement.
- Charge: 11 h
- Battery life: 11 h
- Class: III
- Protection rating: IP54
- CRI>80

### 3. Battery charger technical data:

- Contact charging base: INPUT/OUTPUT 5Vdc - 1A; USB cable 8' long.
- Charger: INPUT AC100-240V 50/60Hz; OUTPUT 5Vdc-1A.
- The lamp works correctly even when connected to the charging base.
- It is advisable to use the original charger and charging base. Alternatively, you can use a certified 1A charger.



### 4. Important:

- The support surface for the lamp must not exceed a 15° tilt or it will fall.
- The battery has an overload protection function.
- To preserve the integrity of the battery, we recommend keeping the charge between minimum 20% and maximum 80%; if the lamp is not used for long periods, it is advisable to regularly charge/discharge the product.
- Please refer to local laws for the proper disposal and recycling of the battery.



# INSTRUCTIONS FOR USE

## ASSEMBLING INSTRUCTIONS

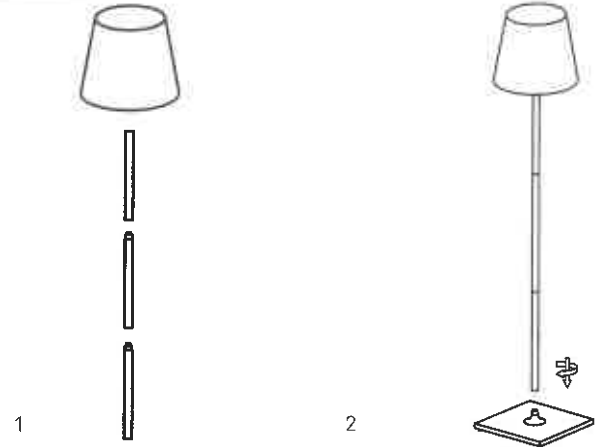



## SWITCHING ON / SWITCHING OFF / DIMMING


Quick taps to:

- turn on
- turn off the lamp

When the lamp is switched on, lightly press the touch sensor to obtain the desired brightness. Every time you turn it on, the light intensity returns to 100%

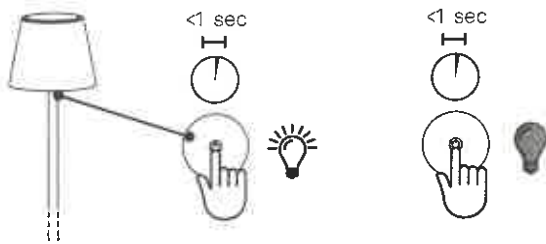

## COLOR TEMPERATURE CONFIGURATION

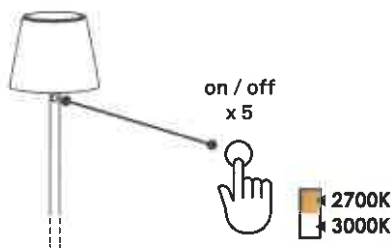

Turn the lamp on and off 5 times in succession; the 5th time you turn it on (10th touch), the colour temperature will be changed. N.B. No more than 5 seconds must elapse between one touch and the next.

## CHARGE / INDICATOR LEDS

Charge the battery before initial use. To correctly charge the lamp, we recommend that you:

- 1) Connect the USB cable to the adaptor;
- 2) Put the plug into the electrical socket
- 3) Place the lamp on the charging base;
- 4) When fully charged, disconnect the plug from the electrical socket

