

KP1000

Standalone Keypad and Proximity Access

- Operating voltage 12Vdc
- Allows up to 2000 IC card capacity
- Backlit keypad
- Read and register card continuously, submit card number and card code automatically
- Read card to open and close
- Operation mode: Card, code, card or code, card + code
- Door opening signal output by relay directly (*NO/NC optional*)
- 2 LED displays with audible indication





WEATHER
RESISTANT
- IP 65 -



VANDAL
RESISTANT



STAINLESS
STEEL

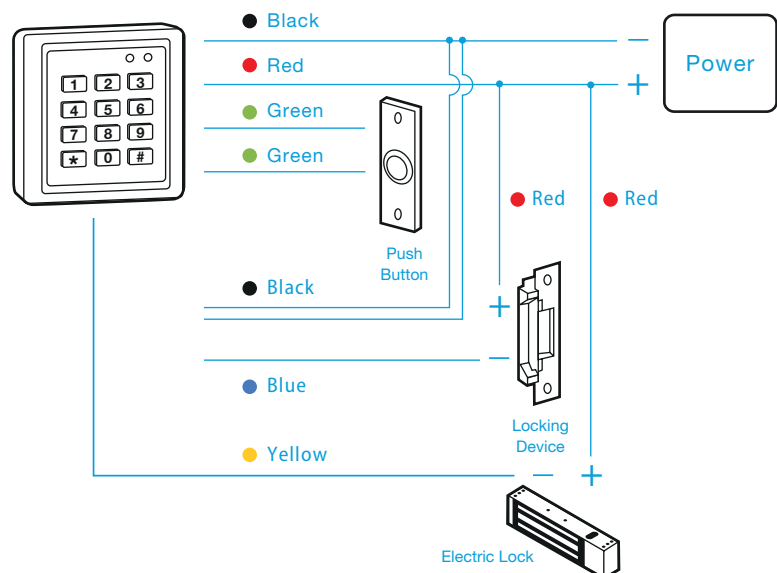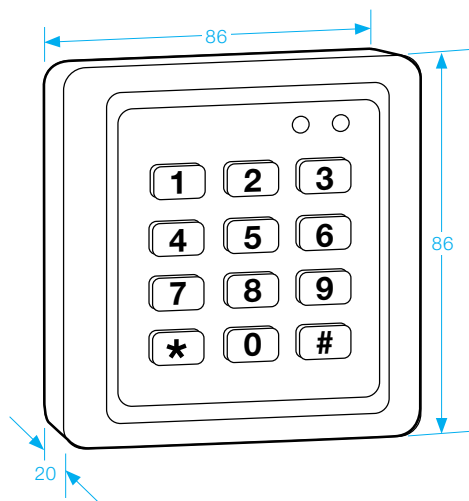

SPECIFICATION

- Operating voltage: $\pm 10\%$.
- Operating temperature: $-10\sim 50^{\circ}\text{C}$ (14 to 131°F).
- Operating current: $< 0.1\text{A}$
- Capacity of recording: 2000 ID Cards and 1 Group Code
- Card reading distance: 5-15cm.
- Humidity: 20~80% non-condensing.
- Weight: 0.15kg (approx).