

# ML360

## Monitored Electric Lock



- Monitored
- Operating voltage 12Vdc (24Vdc available to order)
- Stainless Steel
- Fail Safe
- 1500lbs holding force
- 500lbs side-load

### SPECIFICATION


- Voltage tolerance  $\pm 10\%$
- Current draw: 250mA at 12Vdc, 150mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~45°C (14 to 120°F)
- Bolt Sensor Monitoring
- Door Status Monitoring



STAINLESS  
STEEL



500LBS  
SIDELOAD

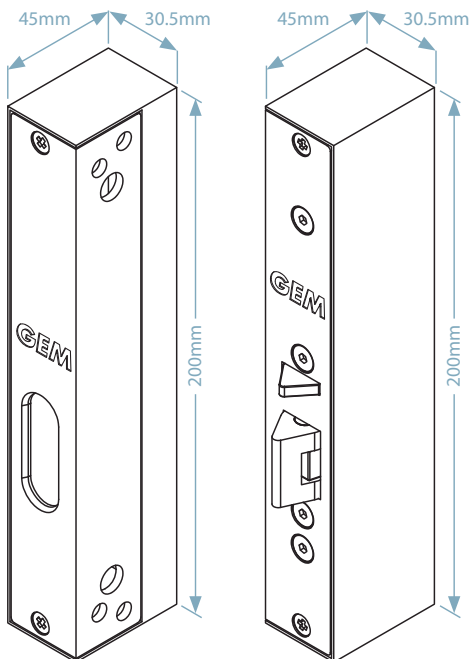

Operating  
Voltage



Lock Bolt  
Sensor  
Output



**BOND SENSOR SWITCH**  
N.C.: Unlocked  
N.O.: Locked  
1A/125Vac  
(Lock status output: 1A/125Vac)

Door Status  
Output



**DOOR STATUS SWITCH**  
N.C.: Unlocked  
N.O.: Locked  
1A/125Vac  
(Door status output: 1A/125Vac)

