


# PS10A-9CH-12VS

## Power Supply

- 200-240Vac 50/60Hz power input
- 12.0-14Vdc (*adjustable*)
- Max load 10A
- Metal hinged box
- Deep discharge protection
- LED Indicators
- Key lockable
- Mains power light indicator

H	W	D
185	275	55

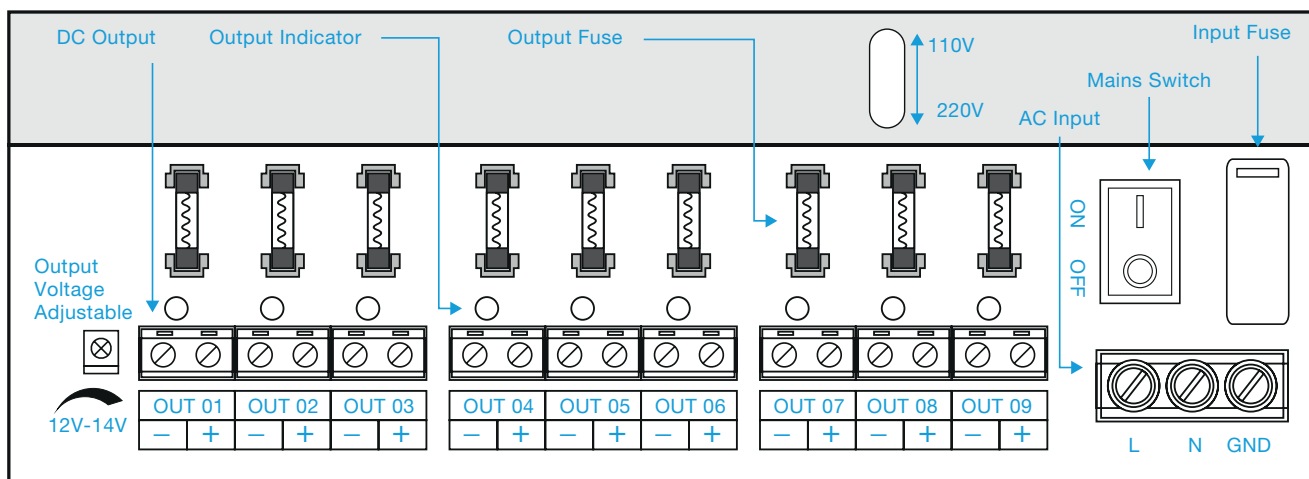

### SPECIFICATION

- Voltage tolerance:  $\pm 15\%$ .
- Output fuse: 1.5A 250V (*glass fuse*).
- Max load current: 10A
- Ripple: 100mV max
- Operating temperature:  $-20\sim 45^{\circ}\text{C}$  ( $14$  to  $131^{\circ}\text{F}$ ).
- Humidity: 0~95% non-condensing.