


PYDAQ B800: Multichannel Wireless Programmable RTU

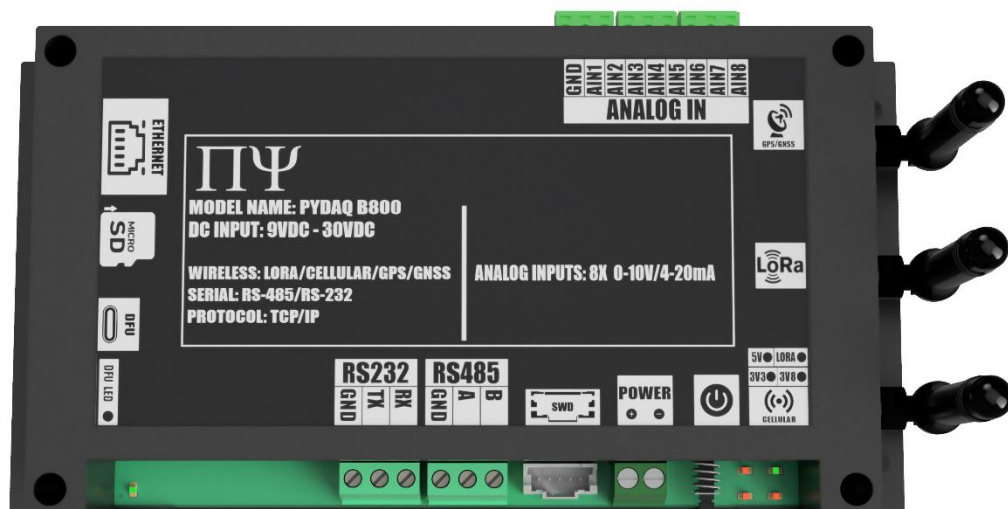

Features

I/O Analog/Digital Ports

- 8x Analog Inputs

Wired Com Ports

- RS-232 Modbus RTU
- Dual RS-485 Modbus RTU
- Ethernet Modbus TCP

Wireless Communication

- Radio ISM 900MHz RTU
- Cellular LTE 4G MQTT/HTTP

BLE Mobile Applications

- iOS Mobile App using BLE
- Android Mobile App using BLE


Overview

Pydaq B800 is a 8-channel Analog Input Wireless RTU. The Device is designed to interface to any 4-20mA and 0-10V compatible sensors. Raw data collected from the sensors can be processed by PytroAI Edge Computing Engine embedded into the device. Processed data can be accessed via several wired communication options using RS-232 and RS-485 Modbus RTU and using Modbus TCP over Ethernet.


Specifications

Power	Power Supply Voltage	9-30V
	Power Type	DC-in
	Current Draw	150mA@Typical 3A@Peak
Mechanical	Dimensions	152.05" L x 87.2" W x 1.6" H
	Enclosure	ABS Plastic
	IP Rating	IP 64
Environment	Operating Temperature	-40°C to 85°C
	Operating Humidity	5%~95% Relative Humidity, non-condensing
I/O Ports	Analog Inputs	8x Channel: 0-10V, 4-20mA
Wired Communication	RS-232	1x Port: Modbus RTU Master/Slave
	RS-485	1x Port: Modbus RTU Master/Slave
	Ethernet	1x Port: Modbus TCP Master/Slave
Wireless Communication	Radio	900MHz ISM Protocol: Star Topology
	Cellular	LTE 4G Protocol: MQTT/HTTPS
	Bluetooth	2.4GHz ISM Protocol: BLE
Certification	FCC, IC	


Pinout Diagram

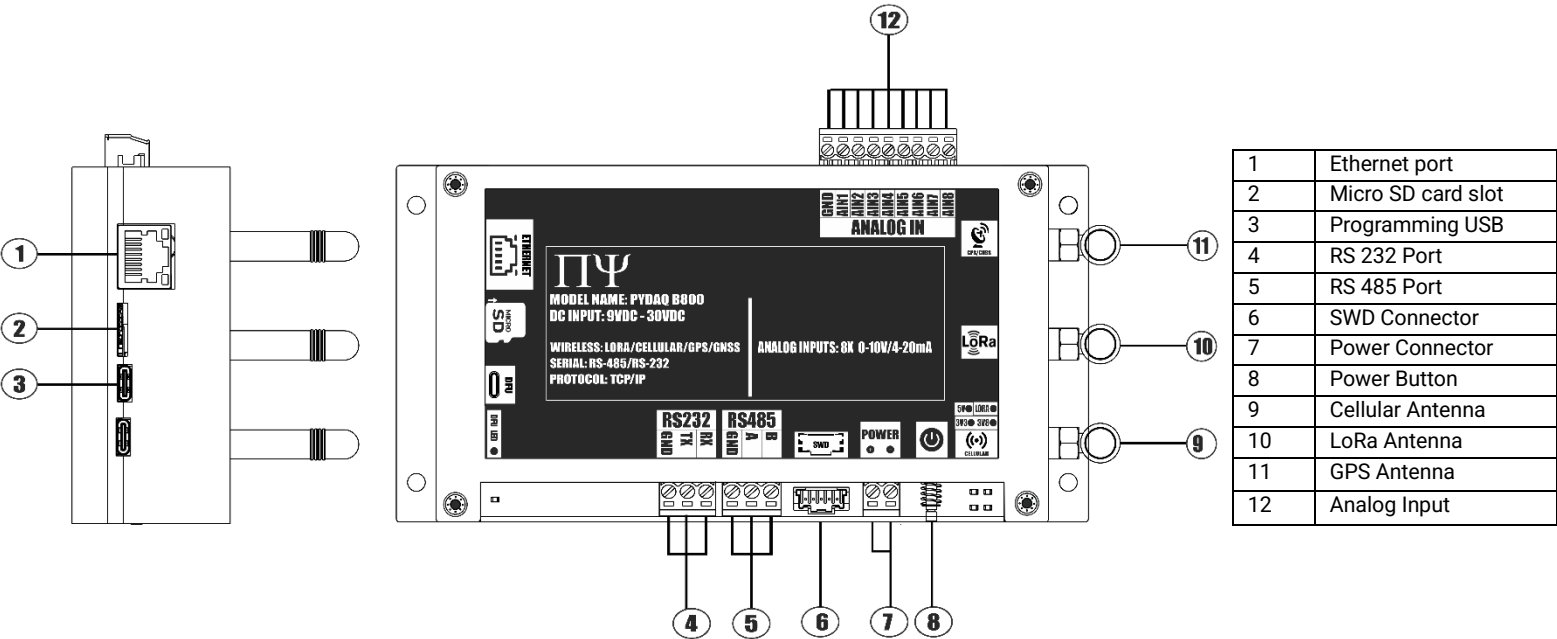

Mechanical Diagram

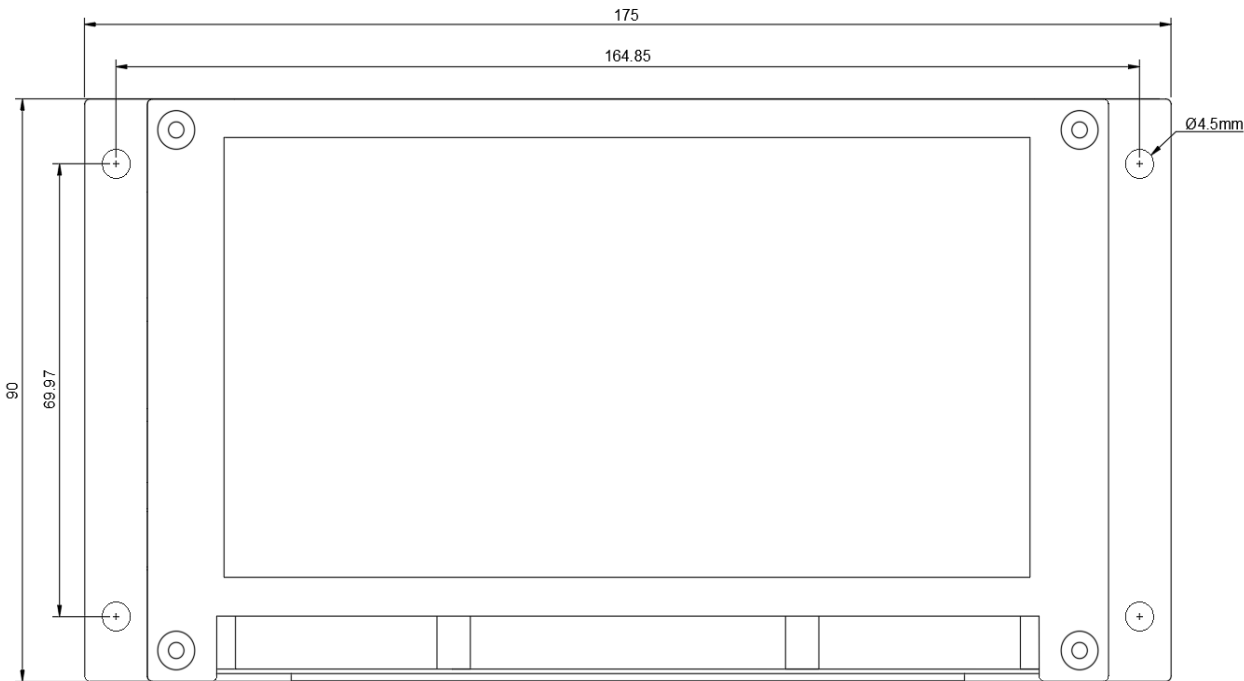

Wiring Diagram

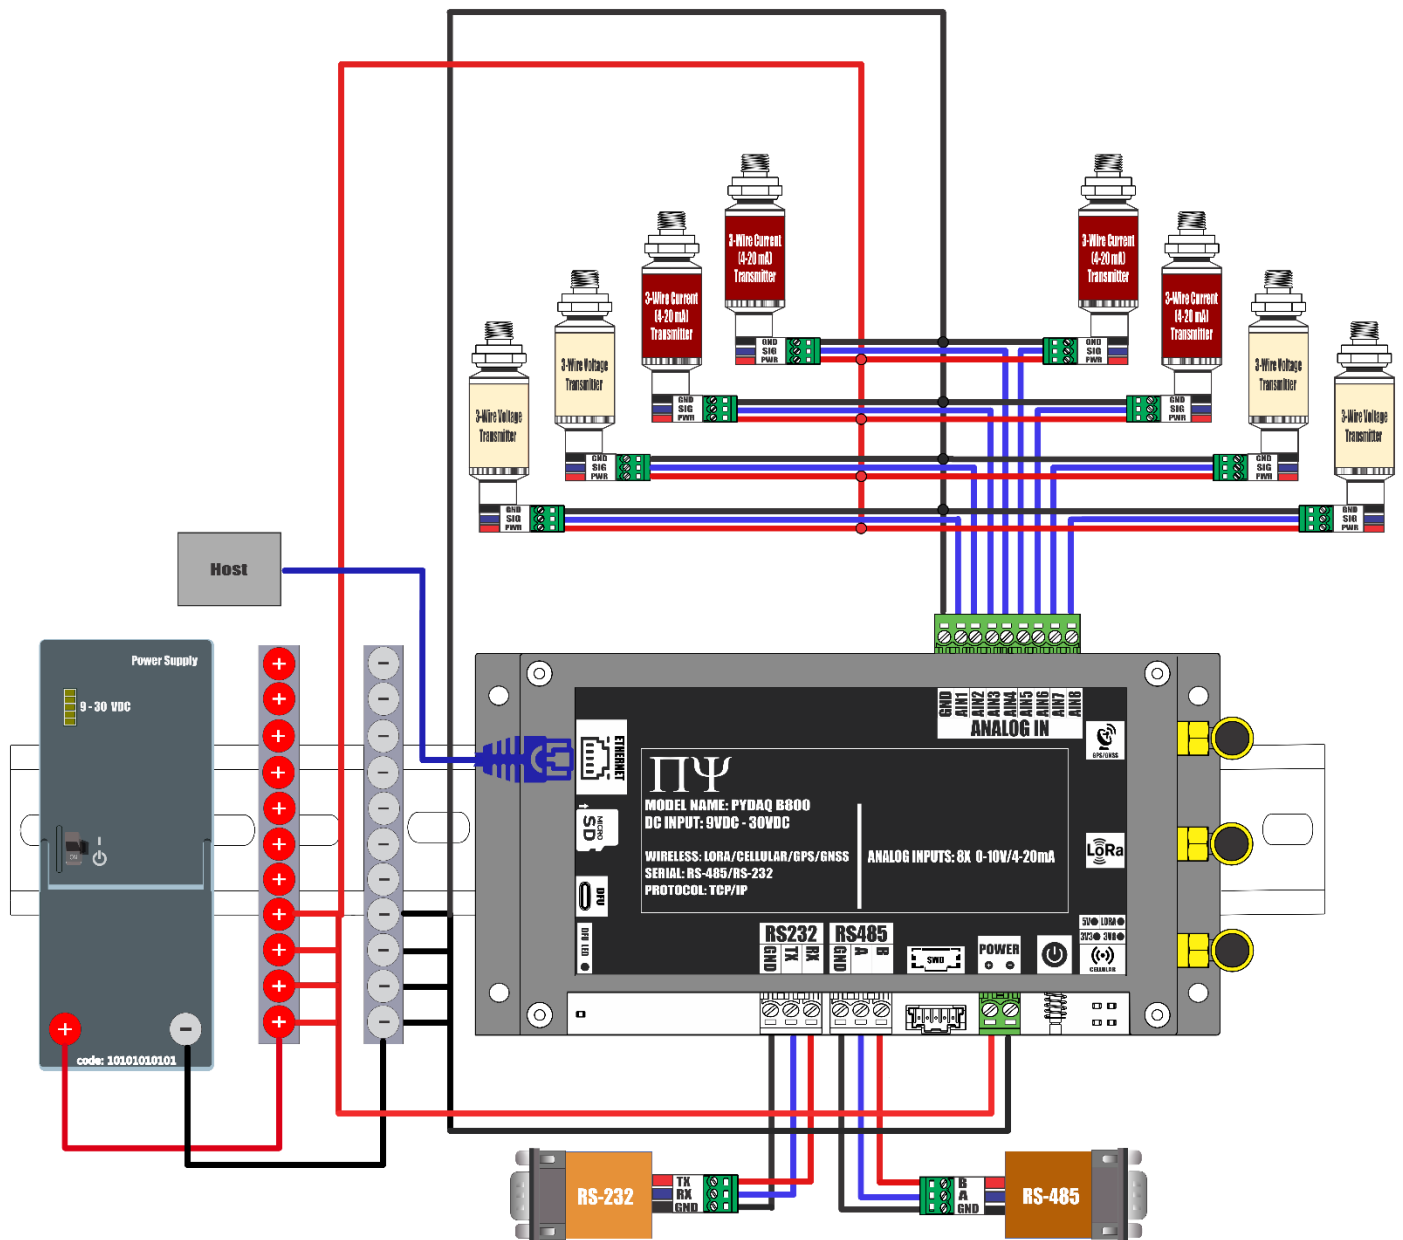

Software and Documentation

Document	Software Configuration
Pydaq B800 Operation Manual	<p>Pydaq B800 is configured using a browser based AI assisted tool called PytroAI.</p> <p>PytroAI is accessed by going to https://build.s2c.io/?username=demo</p> <p>The various application notes provide a detailed walkthrough for configuring the PYDAQ B800.</p>
Pydaq B800 Software Manual	
Pydaq B800 Point-2-Point Radio Bridge Application Note	
Pydaq B800 Point-2-MultiPoint Radio Bridge Application Note	
Pydaq B800 Tank Level Monitoring Application Note	
Pydaq B800 Modbus RTU Master Application Note	
Pydaq B800 Modbus RTU Slave Application Note	
Pydaq B800 Modbus TCP Master Application Note	
Pydaq B800 Modbus TCP Slave Application Note	

Address: 1000 Innovation Dr. Suite 500, Kanata, Ont. K2K 3E7

Tel: 1-613-271-3729

Email: info@pytronix.com

<https://www.pytronix.com/>